



**Recommended Practices**  
for  
**STEP AP242 TC Business Object Model XML**  
**Product & Assembly Structure**

*Release 2.2*

30 September 2020

**Contacts:**

**Organizational**

**Jochen Boy**  
PROSTEP AG  
Dolivostraße 11  
64293 Darmstadt  
Germany

[jochen.boy@prostep.com](mailto:jochen.boy@prostep.com)

**Phil Rosché**  
ACCR, LLC.  
125 King Charles Circle  
Summerville  
SC 29485 / USA

[phil.rosche@accr-llc.com](mailto:phil.rosche@accr-llc.com)

**Frédéric Darré**  
Airbus Operations  
316 Rue de Bayonne  
31060 Toulouse  
France

[frederic.f.darre@airbus.com](mailto:frederic.f.darre@airbus.com)

**Technical**

**Guillaume Hirel**  
T-Systems  
[guillaume.hirel@t-systems.com](mailto:guillaume.hirel@t-systems.com)

**Jochen Haenisch**  
Jotne EPM  
[jochen.haenisch@jotne.com](mailto:jochen.haenisch@jotne.com)

## Table of Contents

<b>1</b>	<b>Introduction.....</b>	<b>13</b>
1.1	Document Overview .....	13
1.1.1	Goal and Objectives .....	13
1.1.2	Scope.....	13
1.1.3	Intended Audience.....	14
1.1.4	Intended Use.....	14
1.1.5	Document Style.....	14
1.1.6	Document Structure.....	15
1.1.7	Instantiation Diagrams .....	15
1.2	Organizational Framework.....	19
1.2.1	Vendor Communities .....	19
1.2.2	User Communities .....	19
1.3	Maintenance of this Document .....	20
<b>2</b>	<b>Scope.....</b>	<b>21</b>
2.1	In Scope .....	21
2.2	Out of Scope .....	22
2.3	Implementation Changes between AP242-IS and AP242-TC .....	23
<b>3</b>	<b>Reference to Recommended Practices .....</b>	<b>24</b>
<b>4</b>	<b>Basic Concepts.....</b>	<b>25</b>
4.1	XML Format Specifics .....	25
4.1.1	Character Set.....	25
4.1.2	Containment vs. Referencing .....	25
4.1.3	Root Objects and DataContainer .....	26
4.1.4	Subtyping.....	26
4.1.5	Header object.....	27
4.1.6	XML context tagging .....	28
4.1.7	Schema version and document version identifications .....	28
4.1.8	Dates.....	28
4.1.9	STEP BO Model XML File Extensions .....	28
4.2	Rules for Attribute Cardinality .....	29
4.2.1	Entities and Attributes not supported by the Preprocessor .....	29
4.2.2	Entities and Attributes not supported by the Postprocessor.....	30
4.2.3	Unspecified and Optional Attribute Values .....	30
4.2.4	Derived Attributes .....	30
4.3	Uniqueness of Identifiers .....	31
4.4	Project Specific Values .....	31
4.5	Blanks in String Values.....	32
4.6	Basic Building Blocks .....	32
4.6.1	Template “ExchangeContext”.....	32
4.6.2	Template “Organization” .....	34
4.6.3	Template “Unit” .....	36
4.6.4	Template “Class”.....	38
4.6.5	Template “Classification” .....	41
4.6.6	Template “Identifier”.....	42

4.6.7	Template “Description” .....	46
4.6.8	Template “ViewContext” .....	46
4.6.9	Template “NumericalValue” .....	48
4.6.10	Template “StringValue” .....	50
4.6.11	Template “DateTime” .....	52
4.6.12	Template “Approval” .....	54
4.6.13	Template “Person” .....	57
4.6.14	Template “PersonInOrganization” .....	59
<b>5</b>	<b>Part Identification and Classification .....</b>	<b>65</b>
5.1	Templates “Part” and “Assembly” .....	65
5.1.1	Part .....	67
5.1.2	PartVersion .....	71
5.1.3	PartView .....	73
5.1.4	AssemblyDefinition .....	76
5.1.5	PartVersionRelationship .....	78
5.1.6	Distinction between Identifiers given by OEM and Supplier .....	82
<b>6</b>	<b>Part Properties .....</b>	<b>85</b>
6.1	Template “GeometricModel” .....	85
6.1.1	ExternalGeometricModel / ComposedGeometricModel .....	90
6.1.2	The subtype of ExternalGeometricModel .....	92
6.2	Template “PropertyAssignment” .....	92
6.3	Template “ShapeDependentProperty” .....	97
6.3.1	GeneralShapeDependentProperty .....	97
<b>7</b>	<b>Part Structure and Relationships .....</b>	<b>101</b>
7.1	Template “SingleOccurrence” .....	101
7.2	Template “SpecifiedOccurrence” .....	107
7.3	Full / Simplified Positioning Representation .....	113
7.3.1	Template “Simplified Positioning Representation” .....	114
7.3.2	Full Positioning Representations .....	118
7.4	Template “PartViewRelationship” .....	138
7.5	Alternate and Substitute Parts .....	146
7.5.1	Template “AlternatePartRelationship” .....	146
7.5.2	Template “AssemblyOccurrenceRelationshipSubstitution” .....	150
7.5.3	Template “AssemblyViewRelationshipSubstitution” .....	153
7.6	Template “OccurrenceRelationship” .....	157
<b>8</b>	<b>Document Identification and Classification .....</b>	<b>159</b>
8.1	Template “Document” .....	160
8.1.1	Document .....	161
8.1.2	DocumentVersion .....	164
8.1.3	DocumentDefinition .....	167
8.2	Template “DocumentDefinitionRelationship” .....	169
8.3	Template “DocumentVersionRelationship” .....	174
<b>9</b>	<b>External Files .....</b>	<b>177</b>
9.1	Template “DigitalFile” .....	177
9.2	Template “FileRelationship” .....	183

9.3	File Structure (monolithic/nested)	185
9.4	Incremental Data Exchange	192
<b>10</b>	<b>Document and File Properties</b>	<b>198</b>
10.1	Template "FormatProperty"	198
10.2	Template "ContentProperty"	201
10.3	Template "CreationProperty"	204
10.4	Template "SizeProperty"	205
10.5	Template "DocumentFileProperty"	206
<b>11</b>	<b>Document and File Association to Product Data</b>	<b>209</b>
11.1	Template "CAx Representation for DocumentAssignment"	210
11.2	Template "PDM Representation for DocumentAssignment"	216
<b>12</b>	<b>PDM Properties and CAD User-Defined Attributes</b>	<b>223</b>
12.1	Fundamental concepts	223
12.2	Template "PropertyDefinition"	224
12.3	Group of attributes and group of attributes values	228
12.4	Specifying the target for the attribute	230
12.4.1	Attributes at the part level	230
12.4.2	Attributes at component instances in an assembly	230
12.4.3	Attributes at the shape level	231
12.5	Definition of attribute value	231
12.5.1	Values with Unit	231
12.5.2	Values without Unit (String)	232
12.5.3	Values without unit (Integer, Real, Boolean, Logical)	232
12.6	Transfer of Meta-Data for the User Defined Attributes	235
12.6.1	Designation of the Attribute Type	236
<b>13</b>	<b>Validation Properties</b>	<b>237</b>
13.1	Assembly Validation Properties (Notional Solid, Number of Children)	237
13.1.1	Number of Children	238
13.1.2	Notional Solids Centroid Position	239
13.2	Geometric Validation Properties (Repeated from referenced Parts)	241
13.2.1	Validation Properties for Solid Geometry	242
13.2.2	Validation Properties for Surface Geometry	244
13.2.3	Validation Properties for Curve / Wireframe Geometry	245
13.2.4	Bounding Box	245
<b>14</b>	<b>Exchange of Customized PDM Information</b>	<b>246</b>
14.1	Supported Customization Features of the PDM Systems	246
14.2	Customized Objects & Structures	246
14.3	Customized Properties	247
<b>15</b>	<b>Multi-View Product Structure Representation</b>	<b>251</b>
15.1	Multiple view concept	251
15.2	Product structure with Part and Occurrence	252
15.3	Product structure with IndividualPart	253
15.4	Relationship between views based on product structure with Part and Occurrence	253

15.4.1	PartViewRelationship usage for multi view.....	254
15.4.2	OccurrenceRelationship usage for multi view .....	254
<b>16</b>	<b>CAX-PDM Compatibility Guide .....</b>	<b>256</b>
16.1	CAX system to read a file coming from a PDM system.....	256
16.2	PDM system to read a file coming from a CAX system .....	257
<b>17</b>	<b>Outlook.....</b>	<b>258</b>
17.1	“Model-based” approach for future versions of this document.....	258
<b>18</b>	<b>List of Templates .....</b>	<b>259</b>
<b>Annex A</b>	<b>XML Schema derivation from BO Model EXPRESS Schema .....</b>	<b>261</b>
A.1	General concepts .....	261
A.1.1	Naming conventions .....	261
A.1.2	Mapping of EXPRESS entity data types.....	261
A.1.3	Mapping of named data types .....	262
A.1.4	Mapping of SELECT data types .....	263
A.1.5	Mapping of EXPRESS attributes .....	263
A.1.6	Not mapped EXPRESS Constructs.....	267
A.1.7	Containment and referencing rules.....	267
A.1.8	Change of Direction for Associations .....	269
A.1.9	Representation of Id Attribute.....	273
A.1.10	Multilanguage Support.....	274
A.1.11	Representation of Date and Time.....	275
A.2	Unit of Serialization.....	275
A.3	XML configuration specification .....	275
<b>Annex B</b>	<b>Known Issues.....</b>	<b>276</b>
<b>Annex C</b>	<b>Reference Documents .....</b>	<b>283</b>
<b>Annex D</b>	<b>Conversion from implicitly to explicitly defined transformation .....</b>	<b>284</b>
<b>Annex E</b>	<b>Recommendation for the Definition of Units.....</b>	<b>286</b>
E.1	SI Base Unit Definitions .....	286
E.2	SI Derived Units.....	287
E.2.1	Named units derived from SI base units.....	287
E.2.2	Derived quantities and units .....	288
E.3	Unspecified Units.....	289
E.3.1	Byte.....	289
E.3.2	Each.....	290
E.4	Imperial Units .....	290
<b>Annex F</b>	<b>AP214 AIM to AP242 BOM Mapping.....</b>	<b>292</b>

## List of Figures

Figure 1: Template "ExchangeContext" .....	32
Figure 2: Template "Organization" .....	34
Figure 3: Template "Unit" .....	36
Figure 4: Template "Class" .....	38
Figure 5: Template "Classification" .....	41
Figure 6: Template "Identifier" .....	43
Figure 7: Template "ViewContext" .....	47
Figure 8: Template "NumericalValue" .....	48
Figure 9: Template "StringValue" .....	50
Figure 10: Template "DateTime" .....	52
Figure 11: Template "Approval" .....	55
Figure 12: Template "Person" .....	58
Figure 13: Template "PersonInOrganization" .....	60
Figure 14: Template "Part" .....	66
Figure 15: Template "Assembly" .....	67
Figure 16: Template "PartVersionRelationship" .....	79
Figure 17: Template "GeometricModel" .....	85
Figure 18: Template "PropertyAssignment" .....	93
Figure 19: Template "ShapeDependentProperty" for either PartView or ShapeElement.....	97
Figure 20: Template "SingleOccurrence" .....	102
Figure 21: Example structure for multi-level assembly.....	108
Figure 22: Template "SpecifiedOccurrence" .....	109
Figure 23: Instantiation without the intermediate SpecifiedOccurrences .....	112
Figure 24: Instantiation with all the intermediate SpecifiedOccurrences .....	112
Figure 25: Template "Simplified Positioning Representation" .....	115
Figure 26: Instantiation example if Part #2 has geometry .....	117
Figure 27: Full Positioning Representation with Implicit Transformation .....	120
Figure 28: Full Positioning Representation with Explicit Transformation .....	126
Figure 29: Full Positioning Representation with Same Coordinate Space .....	132
Figure 30: General Geometric Representation Relationship .....	136
Figure 31: Template "PartViewRelationship" for properties .....	139
Figure 32: Template "PartViewRelationship" for quantity (+ properties).....	140
Figure 33: Template "AlternatePartRelationship" .....	148
Figure 34: Template "AssemblyOccurrenceRelationshipSubstitution" .....	151
Figure 35: Template "AssemblyViewRelationshipSubstitution" .....	154
Figure 36: Template "Document" .....	161
Figure 37: Template "DocumentDefinitionRelationship" .....	171
Figure 38: Template "DocumentVersionRelationship" .....	174
Figure 39: Template "DigitalFile" .....	178
Figure 40: Template "FileRelationship" .....	183
Figure 41: Example for Nested Structure.....	186
Figure 42: Example for Nested Structure with additional part-level XML files .....	186
Figure 43: Element Structure for Nested XML File.....	189

Figure 44: Template “Component reference” .....	195
Figure 45: Template “Document reference” .....	196
Figure 46: Template “File reference” .....	197
Figure 47: Template “FormatProperty” .....	198
Figure 48: Template “ContentProperty” .....	201
Figure 49: Template “CreationProperty” .....	204
Figure 50: Template “SizeProperty” .....	205
Figure 51: Template "DocumentFileProperty".....	207
Figure 52: Template "CAx Representation for DocumentAssignment".....	211
Figure 53: Model splitting for "CAx Representation for DocumentAssignment".....	214
Figure 54: Alternate models for "CAx Representation for DocumentAssignment".....	215
Figure 55: Template "PDM Representation for DocumentAssignment" .....	217
Figure 56: Model splitting for "PDM Representation for DocumentAssignment".....	220
Figure 57: Alternate models for "PDM Representation for DocumentAssignment".....	222
Figure 58: Definition of an attribute name and its usage .....	224
Figure 59: Template "PropertyDefinition".....	225
Figure 60: Defining a group of attributes.....	228
Figure 61: Defining a group of attribute values .....	229
Figure 62: User defined attribute at the part/assembly level .....	230
Figure 63: User defined attribute for a simple component instance in an assembly .....	230
Figure 64: User defined attribute for a shape or a portion of shape .....	231
Figure 65: Specification of meta data for an attribute and its value .....	235
Figure 66: Instantiation of AVP ‘number of children’ for 3 children.....	238
Figure 67: Instantiation of AVP ‘notional solids centroid’.....	240
Figure 68: Geometric Validation Properties at the Part and Assembly level.....	241
Figure 69: GVP ‘volume’ of 3.4 cubicmetre assigned to a Part or Assembly .....	242
Figure 70: GVP ‘surface area’ of 2.3 squaremetre assigned to a Part or Assembly .....	243
Figure 71: GVP ‘centroid’ or CentreOfMass assigned to a Part or Assembly .....	244
Figure 72: Bounding Box defined by two opposing corner points.....	245
Figure 73: Default/Allowed values of customized properties .....	248
Figure 74 Representation of As Designed and As Planned views .....	253
Figure 75 Representation of tracking relationship.....	254



## List of Tables

Table 1: Instance Diagram Notation .....	18
Table 2: "ExchangeContext" Attributes .....	32
Table 3: "Organization" Attributes .....	35
Table 4: "Unit" Attributes .....	37
Table 5: "Class" Attributes .....	39
Table 6: "ExternalClassSystem" Attributes .....	39
Table 7: "Classification" Attributes .....	41
Table 8: "Identifier" Attributes .....	43
Table 9: "ViewContext" Attributes .....	47
Table 10: "NumericalValue" Attributes .....	49
Table 11: "StringValue" Attributes.....	51
Table 12: "DateTime" Attributes .....	53
Table 13: "ApprovalAssignment" Attributes .....	55
Table 14: "Approval" Attributes .....	56
Table 15: "Person" Attributes.....	58
Table 16: "OrganizationOrPersonInOrganizationAssignment" Attributes .....	61
Table 17: Recommended Values of "OrganizationOrPersonInOrganizationAssignment.role" .....	62
Table 18: "PersonInOrganization" Attributes.....	63
Table 19: "Part" Attributes .....	69
Table 20: "PartVersion" Attributes .....	72
Table 21: "PartView" Attributes.....	75
Table 22: "AssemblyDefinition" Attributes, including attributes inherited from "PartView" .....	77
Table 23: "PartVersionRelationship" Attributes .....	80
Table 24: "GeometricModel" Attributes .....	86
Table 25: "GeometricCoordinateSpace" Attributes .....	87
Table 26: "AxisPlacement" Attributes .....	88
Table 27: "CartesianPoint" Attributes.....	89
Table 28: "ComposedGeometricModel" / "ExternalGeometricModel" Attributes.....	90
Table 29: "PropertyAssignment" Attributes .....	94
Table 30: "GeneralShapeDependentProperty" Attributes .....	98
Table 31: "ShapeElement" Attributes.....	98
Table 32: "NextAssemblyOccurrenceUsage" Attributes.....	104
Table 33: "SingleOccurrence" Attributes.....	106
Table 34: "SpecifiedOccurrence" Attributes .....	111
Table 35: "CartesianTransformation" Attributes .....	116
Table 36: "GeometricRepresentationRelationshipWithPlacementTransformation" Attributes .....	124
Table 37: "GeometricRepresentationRelationshipWithCartesianTransformation" Attributes	130
Table 38: "GeometricRepresentationRelationshipWithSameCoordinateSpace" Attributes..	135
Table 39: "General Geometric Representation Relationship" Attributes.....	137
Table 40: "PartViewRelationship" Attributes .....	142
Table 41: "NextAssemblyViewUsage" Attributes .....	145



Table 42: Overview of all Alternate/Substitute mechanisms .....	146
Table 43: "AlternatePartRelationship" Attributes.....	149
Table 44: "AssemblyOccurrenceRelationshipSubstitution" Attributes .....	153
Table 45: "AssemblyViewRelationshipSubstitution" Attributes .....	156
Table 46: "OccurrenceRelationship" Attributes .....	157
Table 47: "Document" Attributes.....	163
Table 48: "DocumentVersion" Attributes.....	165
Table 49: "(Digital)DocumentDefinition" Attributes.....	168
Table 50: "DocumentDefinitionRelationship" Attributes.....	172
Table 51: "DocumentVersionRelationship" Attributes .....	175
Table 52: "DigitalFile" Attributes .....	180
Table 53: "ExternalItem" Attributes .....	182
Table 54: "FileRelationship" Attributes.....	184
Table 55: "FormatProperty" Attributes .....	198
Table 56: "ContentProperty" Attributes .....	201
Table 57: "CreationProperty" Attributes .....	204
Table 58: "SizeProperty" Attributes.....	205
Table 59: "DocumentAssignment" Attributes .....	209
Table 60: "PropertyDefinition" Attributes.....	225
Table 61: "CentreOfMass" Attributes .....	240

## Document History

Revision	Date	Change
1.0	2015-02-13	Initial Release
1.1	2016-05-20	<p>Section 4: Updated descriptions of DataContainer, Subtyping and Header Object; updated Templates ExchangeContext, Class, Identifier</p> <p>Section 5: New section on PartVersionRelationship</p> <p>Section 6: Updated description for assignment of Units and use of Classification</p> <p>Section 7: Added descriptions for DefiningGeometry and “Part Overloading”; improved several descriptions</p> <p>Section 8: Improved definition of DocumentType; new section DocumentDefinitionRelationship</p> <p>Section 9: Improved descriptions; new section FileRelationship</p> <p>Section 10: Updated recommendations for CreationProperty</p> <p>Section 11: Updated descriptions to include Model Splitting / Sharing and Alternate Models, for CAx as well as PDM mapping</p> <p>Section 12: Improved description for attribute types</p> <p>Section 13: Updates description for classification of attributes</p>
1.2	2017-06-30	<p>Overall: updated instantiation diagrams for Class / String; improved illustration of XML embedding</p> <p>Section 2: Refined Scope statements</p> <p>Section 4.1: Case handling in Attributes</p> <p>Section 4.2: Updated attributes for Version ID</p> <p>Section 4.6: Updated XML examples and attribute recommendations</p> <p>Section 5.1: Added PartViewRelationship; updated Property Value Assignment; added Multiple Part Versions and Relationships; added support for Supplier Part Number</p> <p>Section 6: Clarification for use of ShapeElement</p> <p>Section 6.1: Refined descriptions for CartesianPoint and GeometricCoordinateSpaces</p> <p>Section 6.2: Added Definition of Property Types; renamed PartProperty to PropertyAssignment</p> <p>Section 6.3: Added clarifications for Centroid and MomentsOfInertia</p> <p>Section 7: Added clarification for creation of occurrences; added PartViewRelationship</p> <p>Section 7.1: Updated recommendations for SingleOccurrence</p> <p>Section 7.3: Revised RotationMatrix attribute recommendations</p> <p>Section 7.4: Updated NextAssemblyOccurrenceUsage</p> <p>Section 8.1: Multiple DocumentVersions and -Definitions</p> <p>Section 8.3: Added DocumentVersionRelationship</p> <p>Section 9: File &amp; Document Structure updates</p> <p>Section 9.3: Added clarifications to the use of nested files and removal of PDM representation</p> <p>Section 10.1: Extended list of values for non-CAD documents; update FileFormat Property recommendations; added clarifications to the use of compression</p> <p>Section 10.4: Updated Property Assignment</p> <p>Section 12: Revision based on PDM-IF Discussions; Clarification for use of ShapeElement</p> <p>Section 12.2: Added ‘general property’ to PropertyDefinition.Id</p>

Revision	Date	Change
		Section 12.5: Re-wrote attribute definition for values without unit Section 13: Added attribute table for CentreOfMass; clarifications for Centroid Annex A.1.5: Added explanation for order of elements Annex B: Updated list of BugZilla Issues Annex C: Updated Reference Document Versions Annex E.3: Unit 'each' for QuantifiedOccurrence
2.0	2018-10-30	<b>Update for AP242-TC</b> <b>See section 2.3 for Implementation differences to AP242-IS</b>  Section 4.2.1: added recommendation for unique attributes Section 4.6.3: Updated recommendations for Unit prefixes Section 4.6.6: Updated 'identifier' information for exchange context Section 4.6.9, 4.6.10, 4.6.14: Updated Attribute Recommendations Section 5.1.2: added EffectivityAssignment to PartVersion Section 5.1.6: Replaced textual Definitions; moved example for multiple ids from section 4.6.6; added second example Section 7.1: Updated Pre-Processor Recommendations for Single-Occurrence and added EffectivityAssignment Section 8.1.1: Updated Post-Processor Recommendations Section 9.3: Updated Post-Processor Recommendations Section 9.4: Updated Pre- and Post-Processor Recommendations Section 12.2, 12.5: Updated Attribute Recommendations Section 13.1: Updated Definitions and Figures 59-64 New Section 14 for Exchange of Customized PDM Information New Section 15 for CAx-PDM Interoperability
2.1	2019-12-20	<b>Public Release – Update for AP242 TC</b>  Sections 1.1.2 and 1.2: Introduction of the MBx Interoperability Forum (MBx-IF) Section 2.2: Updated scope statement Section 4.2.1: Update for the handling of empty valued multi-language strings Section 4.6.1: Updated recommendations for ExchangeContext Section 4.6.6: Updated recommendations for Identifier Section 4.6.7: Replaced previous section with support for multiple language; updated recommendations Section 5.1.1: Added support for alternate part relationships Section 5.1.2 and 7.1: Added support of ActivityAssignment Section 5.1.5: Added support 'alternative' PartVersionRelationship Section 6.1.: Clarified required unit definitions Section 6.2: Added support of Activity properties Section 7.1.: Added support for alternate part relationships; Updated recommendations for uniqueness of occurrence IDs Section 7.4: Added support of AssemblyViewRelationshipSubstitutions Section 7.5: New Template "AlternatePartRelationship" Section 7.6: New Template "AssemblyOccurrenceRelationship-Substitution"

Revision	Date	Change
		Section 7.7: New Template “AssemblyViewRelationshipSubstitution” Section 9.1: Added support of unset DigitalFile.Locations Section 11.1, 11.2: updated figures with use of AuxiliaryGeometry Section 12.2, 12.4: updated figures for PropertyDefinition.Id Section 12.5: Updated the recommendations for transferring values without units Section 12.6: figure 65 updated PropertyDefinition.Id Section 13.1.1: Update format of validation property ‘number of children’
2.2	2020-09-30	<b>Public Release – Update for AP242 TC</b>  Section 1.1.2: Added support for TC patch schema Section 4.2.1: updated base identifiers Section 4.3: updated recommendations for uniqueness of IDs Section 4.6.1: refined postprocessor recommendations Section 4.6.3: updated unit definitions Section 4.6.4, 4.6.5: Updated to support ‘make or buy’ Section 4.6.6: updated identifier attributes and recommendations Section 4.6.8: updated preprocessor recommendation Section 5.1.2: Updated to support ‘make or buy’ Section 5.1.3: added PartView.ShapeElement Section 5.1.5: Added support ‘alternative’ PartVersionRelationship and updated recommendations Section 6.1, 6.2: updated attributes recommendations Section 7.2: added SpecifiedOccurrence.PropertyValueAssignment Section 7.4, 7.5, 7.6, 7.7: Updates based on testing feedback Section 7.5: restructured for Alternate and Substitute parts Section 8.2, 8.3: updated diagrams Section 9.3: adapted definitions for multiple IDs Section 11.2: extended definitions for alternate models Section 12.2: figure 58 updated PropertyDefinition.Id Section 12.2, 12.4, 12.6: updated diagrams Section 12.4.1: figure 62 updated PropertyDefinition.Id Section 12.4.2: figure 63 updated PropertyDefinition.Id Section 12.4.3: figure 64 updated PropertyDefinition.Id Section 12.6: figure 65 updated PropertyDefinition.Id

# 1 Introduction

## 1.1 Document Overview

### 1.1.1 Goal and Objectives

The goal of this document is to describe the recommended structure and attribute population for particular instance models created from the entities and attributes defined by the STEP AP242 “Managed Model-based 3D Engineering” Business Object (BO) model and populated according to its XML Schema. The selected instance models illustrate how to encode data values that need to be exchanged in support of key industry requirements common across the mechanical design domain. The objectives of the usage guide are to:

- Support the short-term needs of the requirements of the Aerospace & Defense and the Automotive industries in the realm of mechanical design
- Prevent the emergence of “flavors”, i.e. diverging/conflicting implementations of the AP242 BO Model XML for different communities
- Ensure consistency with existing Recommended Practices for Basic Product Data Management (PDM), Assembly Structure, External References and Attributes.

### 1.1.2 Scope

This document describes the Recommended Practices for the exchange of Product and Assembly Structure data with external references to geometry files (regardless of file format). It is based on the Technical Corrigendum for STEP AP242, which was published in 2016. It contains a second edition of the Business Object Model (ISO 10303-3001:2016) and the corresponding XML schemas, which can be found at:

- [http://standards.iso.org/iso/ts/10303/-3001/-ed-2/tech/xml-schema/bo\\_model/bom.xsd](http://standards.iso.org/iso/ts/10303/-3001/-ed-2/tech/xml-schema/bo_model/bom.xsd)  
– The BO Model XML Schema
- <http://standards.iso.org/iso/ts/10303/-3000/-ed-2/tech/xml-schema/common/common.xsd>  
– The XML Schema, which contains the structural definitions common to all STEP Business Object Models.

Due to its criticality to be able to exchange conditions made of specifications and effectivities, as well as for the exchange of Kinematics, some specific Bugzilla issues have been implemented in a working release of the BO Model. These issues do not affect anything in this Recommended Practices document.

This working release of the BO Model is called `bom_20170810.xsd` and is to be found under [https://www.cax-if.de/xml-schema/3001/20170810/bom\\_20170810.xsd](https://www.cax-if.de/xml-schema/3001/20170810/bom_20170810.xsd).

Therefore, in the XML header of AP242 BO Model XML files which shall comply to this working release, the following:

```
xmlns:n0="http://standards.iso.org/iso/ts/10303/-3001/-ed-2/tech/xml-  
schema/bo_model" xsi:schemaLocation="http://stand-  
ards.iso.org/iso/ts/10303/-3001/-ed-2/tech/xml-schema/bo_model  
http://standards.iso.org/iso/ts/10303/-3001/-ed-2/tech/xml-  
schema/bo_model/bom.xsd"
```

has to be replaced by:

```
xmlns:n0="https://www.MBx-IF.de/xml-schema/3001/20170810"  
xsi:schemaLocation="https://www.MBx-IF.de/xml-schema/3001/20170810  
https://www.MBx-IF.de/xml-schema/3001/20170810/bom_20170810.xsd"
```

in the XML header.

AP242 is the first STEP Business Object Model that has been implemented. During the implementation of the first edition, the writing of the Recommended Practices, the corresponding testing activities in the involved Interoperability Forums (see section 1.2), as well as the definition of extended capabilities to support new user requirements, various shortcomings in the original schema have been identified. These have been documented in Bugzilla as official maintenance issues for AP242 and were dealt with as part of the ISO maintenance procedures. The agreed upon changes to the schema were gathered in the second edition of the BO Model, and published as a Technical Corrigendum for STEP AP242. Some of these changes require implementation changes compared to the first edition of the BO Model published with AP242 as International Standard (IS) in 2014.

- Version 1.x of this document supports implementations based on AP242 Ed.1 IS (2014)
- Version 2.x supports implementations based on AP242 Ed.1 TC (2016)
- Version 3.x will support implementations based on AP242 Ed.2 (2020)

Currently, the third edition of AP242 is being prepared. It will add new capabilities to the standard, such as support for Electrical Harness definition. This will eventually also lead to a new version of the BO Model. The development of these extended capabilities, as well as changes resulting from implementation feedback and harmonization efforts, is tracked on Bugzilla and follows the standard procedures defined by ISO. As far as they affect the scope of this document, they are documented throughout this document, and gathered in Annex B for reference.

### 1.1.3 Intended Audience

This document is intended to be an implementation guide for developers of CAD, PDM and file translation application systems that must use assembly structure, and exchange it with other systems and applications, in support of the design engineering and related downstream business processes.

### 1.1.4 Intended Use

This document is intended to be a manual and companion to the developer of STEP data exchange and translator software used by applications and information management systems that rely on product data. It provides guidelines for the consistent preprocessor instance model creation and requirement value encoding to enable meaningful information exchange between different systems and applications using the STEP AP242 BO model, and guidelines for the consistent interpretation by a postprocessor of the STEP AP242 BO model exchange file.

### 1.1.5 Document Style

The overall document proceeds in an incremental, step-by-step fashion to describe, and in parallel to illustrate the recommended instantiations of the XML elements in the STEP AP242 BO model.

The “template” concept is used in this document. Structures and sub-structures are defined in one section; they are then re-used in other sections of the documents. These templates are represented by the blue boxes in the diagrams.

The Instance Model diagram figures are presented using a graphical notation intended to illustrate the instance model.

Following each instance diagram, a table lists all the attributes of each displayed entity according to the XMLschema specification of ISO 10303-3001. The table includes not only the attributes of the EXPRESS schema of the AP242 BO Model, but also inverse attributes of all possible relations to the element in question. Attributes that are considered important for the scope of these Recommended Practices are in these tables written in black. Attributes that are written in grey are not covered by these Recommended Practices; their use is discouraged as it would depend on mutual agreements between data exchange partners.



Below the table, all recommended attributes (written in black) are listed and recommendations are made for them.

Finally, a STEP AP242 BO model XML exchange structure example is included. The example exchange file corresponds directly to the instance model diagram and illustrates the very same thing using a different notation, i.e., STEP AP242 BO model XML syntax versus the graphical instance model notation.

### 1.1.6 Document Structure

The overall scope of requirements is partitioned into a set of major sections corresponding to the identified units of functionality. Within a major section, there may be sub-sections. These sub-sections further divide the scope into smaller components of coherent functionality (called “feature”) that interact with each other to realize the functionality of the entire unit.

There is generally a description of requirements and a corresponding instance diagram associated with each section and sub-section of this document. Each instance diagram is followed by a detailed explanation and specific recommendations for the entities used in the instantiation diagram example. The entity listing and explanation is in turn followed by the corresponding XML exchange structure example.

Within a section, diagrams corresponding to sub-sections incrementally build upon one another to finally achieve a complete instance model example that illustrates the entire scope of the unit of functionality.

### 1.1.7 Instantiation Diagrams

The diagrams are presented using a graphical notation intended to illustrate the instance model.

This notation is not EXPRESS-G and does not illustrate the XML schema; rather it is a graphical illustration of a specific population of a particular instance model of the schema. This notation supports:

- Illustration of entity instances and attribute values (both mapped as XML elements)
- Illustration and identification of referenced entity instances that are either fully illustrated in the current figure, or that refer to another template (if not fully illustrated in the current figure)
- Indication of optional attributes and optional reference entity instances (dashed lines),
- Illustration and identification of groups of functionally related instances (shaded bounding box), showing how XML elements are embedded into each other (the XML elements representing the entity instances placed below are embedded into the XML element representing the entity instance placed above), and
- Identification of specific attribute values (typically string values, may also be enumerated type values or numerical values).

A legend for the diagram notation is shown below:



<p>Object1 #1-1</p>	<p>Object (instance of an EXPRESS ENTITY)        After the #, an instance number is given</p>
<p>Object1 #1-1</p> <p>Att1</p> <p>Att2</p>	<p>Att1: mandatory attribute        Att2: optional attribute</p>
<p>Object1 #1-1</p> <p>Att1 S[1:?]</p>	<p>Aggregate type for the definition of the cardinality constraint:</p> <p>B: Bag (non-ordered and may contain duplicates)        S: Set (non-ordered and may not contain duplicates)        L: List (ordered)</p> <p>[x : y]: lower size : upper size        ?: unconstrained</p> <p>A: Array (indexed)        [x : y]: lower index : upper index</p>
<p>Object1 #1-1</p> <p>*Att1</p>	<p>Additional constraint on the object: the attribute(s) depicted with “*” have to contain unique values.  <i>Currently not used in this document</i></p>
<p>Object1 #1-1</p> <p>(DER)Att1</p>	<p>Derived Information from another object or attribute  <i>Currently not used in this document</i></p>
<p>STRING</p> <p>REAL</p> <p>BOOLEAN</p>	<p>Simple data types</p>
<p>Type1</p>	<p>User-defined data type  <i>Currently not used in this document</i></p>
<p>EnumType1</p>	<p>Enumeration Type        (consists of a limited list of possible values defined for this type)</p>

	<p><b>Select Type</b></p> <p>(is used if a relationship from an object may apply either to Object1 or Object2)</p> <p>For a better readability, the members of a select type are displayed using the inheritance link (see below) and the mutually exclusive constraint. This has the same semantic as a select type.</p> <p><i>Currently not used in this document</i></p>
	<p>Attribute as relationship between two Objects (mandatory or optional),</p> <p>The circle at the end of the line gives the direction.</p> <p>Rel1: mandatory relationship        Rel2: optional relationship</p>
	<p>Rel2: inverse attribute (i.e. in the converse direction to Rel1) with cardinality constraint</p> <p><i>Currently not used in this document</i></p>
	<p>Inheritance from a Supertype to its Subtypes</p> <p>An Abstract Supertype (ABS) cannot be instantiated without one of its non-abstract Subtypes</p> <p>1: Only one subtype can be instantiated at a time (the subtypes are mutually exclusive). Per default, all the subtypes may be combined (not supported by XML)</p> <p>RT: an inherited attribute is retyped, for example through restriction of its type, length, value range, cardinality, mandatory instead of optional or DERIVED</p> <p><i>Currently not used in this document</i></p>

	<p>Objects shown under each other within a blue colored square are embedded into each other in XML: here Object2 #2-1 is embedded into Object1 #1-1 as its XML element Rel1</p>
	<p>The templates defined in this document are re-used in other sections. This is the simple way to refer to a template (if the object referenced within the template is implicit, for example the object 'Classification' for the template 'Classification')</p>
	<p>If the template is more complex and the object referenced within the template is shown explicitly, portions of the reused template are displayed within a blue frame.</p>
	<p>Alternatively, a template may be re-used through adding new XML containments to it</p>

Table 1: Instance Diagram Notation

## 1.2 Organizational Framework

These Recommended Practices for AP242 BO Model XML Product and Assembly Structure are jointly developed and supported by a number of “communities”, specifically the vendor and user communities, devoted to the development and implementation of AP242 and its associated Business Object Model. This section describes those communities’ roles and responsibilities.

### 1.2.1 Vendor Communities

The **PDM-IF Implementor Group (IG)** will be responsible for the overall organization and development of this document. The PDM-IF IG will:

- Coordinate the creation of the document
- Verify the approach of the recommended practices in PDM-IF Test Rounds
- Publish result summaries of testing AP242 BO Model product and assembly structure
- Ensure the consistency of other “AP242 BO Model XML Recommended Practices”

The **MBx Interoperability Forum (MBx-IF) Implementor Groups** will support the document development by:

- Coordinating the creation of the document
- Verifying the approach of the recommended practices in MBx-IF Test Rounds
- Ensure the consistency with existing recommended practices from all domains, namely CAx, CAE and EWIS.

The **JT Implementor Forum (JT-IF)** will support the document development by:

- Sharing the recommended practices with JT-IF participants
- Verifying the approach of the recommended practices in JT-IF Test Rounds
- Ensuring the consistency with existing JT-IF recommended practices

### 1.2.2 User Communities

The **PDM-IF User Group (UG)** is a forum of PDM experts from the Aerospace and Defense as well as the automotive industries. The PDM-IF UG is responsible for development of the document and will:

- Support the development of the document
- Provide subject matter experts
- Provide industry requirements and ensure they are fulfilled
- Ensure the consistency with PDM standards spanning the complete product life cycle

**LOTAR** is the Aerospace and Defense user community supporting the development of the Long-term Archiving standards. LOTAR will:

- Support the development of the document
- Provide subject matter experts
- Provide A&D requirements and ensure they are fulfilled
- Ensure the consistency with LOTAR standards



The **MBx Interoperability Forum** (MBx-IF) User Groups are comprised of domain experts for CAx, CAE and EWIS and will:

- Support the development of the document
- Provide subject matter expertise
- Provide industry requirements and ensure they are fulfilled

The **JT Workflow Forum** (JT-WF) is the Automotive user community supporting the development of the recommended practices for the ISO JT format. The JT-WF will:

- Support the development of the document
- Provide subject matter experts
- Provide Automotive requirements and ensure they are fulfilled

### **1.3 Maintenance of this Document**

This document describes the recommended practices to implement the core scope of the AP242 BO Model; that is the definition of products, structures, documents, and the directly related properties. This scope is of relevance to all three involved implementor forums (PDM, CAx and JT) and needs to be supported in a harmonized way across industries, domains, and software tools.

The scope of this document will be restricted to the core capabilities listed below in section 2.1. Domain-specific extensions, such as Configuration Management and Change Management for PDM, or Kinematics for CAD, will be documented in separate documents of the respective Implementor Forums, with references to this core document.

Changes to the core document require consensus from all Ifs, to ensure changes from one group do not create roadblocks for another group. This consensus is assured by sharing working drafts for review with the involved communities and will be coordinated in a way that does not delay the publication of new versions of this document.

PDES, Inc., prostep ivip Association and VDA as the hosting organizations of the involved implementor forums will maintain and extend the document as long as it provides utility to the vendor community.

## 2 Scope

### 2.1 In Scope

**The following are within the scope of this document:**

- Implementations based on AP242 Technical Corrigendum (2016) BO Model (ISO 10303-3001 Edition 2) for:
- Basic PDM Capabilities
  - Identification concept [Part, Part Version, Part View]
  - User Defined Attributes (non-geometric properties)
  - Mechanical CAD Assembly Structures
  - Component Instances, Placement / Transformations
  - Classification
  - Document Management
- Geometric and Assembly Validation Properties
- AP242 IS BO Model XML File Structure
  - One XML file for the entire assembly structure (“monolithic” approach)
  - One XML file per assembly node and per leaf node part (“nested” / “fully shattered” approach)
- External References to files
  - STEP Part 21 files (CAx-IF / LOTAR Scope)
  - AP242 XML files (for “nested” / “fully shattered” approach)
  - ISO 14306 JT files (JT-IF / JT-WF Scope)
  - CAD native files (e.g. Creo, NX, CATIA V5/V6...)
  - Office and general files (e.g., PDF, JPEG...)

**The following capabilities are included in this document for completeness of the definitions, but have not yet been fully tested by the involved Implementor Forums:**

- 5.1.2: Multiple PartVersions within one Part
- 5.1.3: Multiple PartViews within one PartVersion
- 5.1.5: PartVersionRelationship
- 5.1.6: Identifiers at OEM and Supplier
- 6.3.1: GeneralShapeDependentProperty
- 7.2: SpecifiedOccurrence
- 7.5: Alternate and Substitute Parts
- 8.2: DocumentDefinitionRelationship
- 8.3: DocumentVersionRelationship
- 9.2: FileRelationship
- 9.4: Incremental Data Exchange

- 10.5: DocumentFileProperty
- 11.1: Model splitting and alternative geometries (CAx mapping)
- 11.2: Model splitting and alternative geometries (PDM mapping)
- 12.3: Groups of properties and property values
- 12.6: Definition of meta-data for attributes
- 13.2: Repeating Part-level Geometric Validation Properties in PDM files
- 15: Multi-View Product Structure Representation
- A.1.10: Multi-language Support

These sections are defined to the best knowledge of the authors; however, changes based on implementation feedback are possible once these capabilities are being tested.

## 2.2 Out of Scope

**The following are out of scope for this document because they will be covered in other documents:**

- CAx-specific Capabilities such as Kinematics, Composites, etc.
- Advanced PDM Capabilities:
  - Configuration, Effectivity ...
- External Element References (into Part 21 files or between BO Model XML files)
- Implementations based on any edition of the AP242 BO Model (ISO 10303-3001) other than Edition 1 (2016).

**The following are out of scope for this document at the moment, because the underlying use cases and requirements have not yet been fully described:**

- Address
- Certification
- Contract
- ConstituentPart (including measured, calculated, and estimated / asserted weight for single parts and assemblies)
- FrozenAssignment
- InformationUsageRightAssignment
- MaterialPropertyAssignment
- ModelPropertyAssignment
- OccurrenceRelationship (for example ReplacedUsageRelationship or SameTimeMachiningRelationship)
- Validation Properties for Product Structures and External References
- Mirrored parts and document structures
- OrganizationRelationship
- MakeFromRelationship
- QuantifiedOccurrence
- ReplacedPartViewRelationship
- ToolPartRelationship
- Project
- ProjectAssignment
- ProjectRelationship
- PropertyDefinitionAssignment
- SecurityClassificationAssignment
- ShapeElementRelationship
- TimeIntervalAssignment

These will be added in later revisions of this document, based on users' needs and testing progress.



### **2.3 Implementation Changes between AP242-IS and AP242-TC**

For a number of constructs, the implementation changed between the original version of AP242 and its Technical Corrigendum, i.e. ISO 10303-3001 Ed.1 and Ed.2 respectively. These changes became necessary due to deficiencies found in the original definitions of these elements, or to lay the foundation for future extensions of the data model.

The changes include structural changes such as embedding and referencing of XML elements as well as technical changes such as new element types or changed definition of attributes. Several of these changes are incompatible ones, but have been agreed to by all stakeholders, nonetheless.

The list below provides an overview for the necessary implementation changes to support AP242-TC in scope of this document:

- Change of the URL of the AP242 XSD (from IS to TC) (see sections 1.1.2 and 4.1.6)
- Introduction of RepresentationContext (as supertype of GeometricCoordinateSpace) and embedding of the Representations and referencing RepresentationItems embedded in the Representations (see section A.1.8.3)
  - This affects the Full Positioning Representations (see chapter 7.3.2), the CentreOfMass (see sections 13.1.2 and 13.2.1.3) as well as the Kinematics features (see Recommended Practices for AP242 BO Model XML Kinematics for details)
- Introduction of PartView.auxiliaryGeometry for the mapping of alternate Models (see sections 11.1 and 11.2)
- Introduction of GeneralGeometricRepresentationRelationship as subtype of GeometricRepresentationRelationship for the mapping of model splitting (see sections 11.1 and 11.2)
- idRoleRef now mandatory in the XSD (as already mandatory in the EXPRESS Schema)
- enhanced semantical type checking in the XSD (fix of some key and keyref definitions)
- Header.Documentation now as LIST (see section 4.1.5)
- ShapeElement is no root object anymore (see section 6.3.1)
- Fix of the modeling of SpecifiedOccurrence (see section 7.2)
- Improvements of the specification of XSD derivation from EXPRESS (see Annex A)

### 3 Reference to Recommended Practices

For validation purposes, STEP processors shall state which Recommended Practice document and version thereof have been used in the creation of the STEP file. This will not only indicate what information a consumer can expect to find in the file, but even more importantly where to find it in the file.

This shall be done by adding a pre-defined string to the first string element of the `Documentation` attribute of the `Header` element in the XML file (for details see section 4.1.5 below). The value follows a specific pattern well established in Part 21 files:

Document Type---Document Name---Document Version---Publication Date

The string corresponding to this version of this document is:

```
<Documentation>CAx-IF Rec.Pracs.---AP242 BO Model XML  
Assembly Structure---2.2---2020-09-30</Documentation>
```

#### ***General Postprocessor Recommendation:***

If a postprocessor encounters attribute values, or object instantiations different from the ones recommended in this version of the document, a warning shall be recorded. In such case, an additional exchange agreement is supposed to be in place among the parties involved in the data exchange.

## 4 Basic Concepts

### 4.1 XML Format Specifics

Annex A describes the guiding principles used for the mapping from EXPRESS to XML. This section gives some additional hints on how to instantiate it.

#### 4.1.1 Character Set

Beside the use of the XML special characters & (for &), &apos; (for '), &gt; (for >), &lt; (for <) and &quot; (for ") in elements of the kind STRING, any character (even special) can be used.

##### **Preprocessor Recommendations:**

Use of UTF-8 (stated in the first line of the XML file):

```
<?xml version="1.0" encoding="UTF-8"?>
```

➔ special characters like ¼ are mapped with their decimal value (here &#x172;).

Concerning the instance identifiers (called 'uid') of type xsd:ID, they must start with either a letter or underscore ( \_ ) and may contain only letters, digits, underscores ( \_ ), hyphens (-), and periods (.). White space is not allowed.

➔ unlike the instance identifier of ISO STEP Part21, which are restricted to numeric integer values, it is possible to set the uids to some more readable values.

##### **Preprocessor Recommendations:**

Use some (even proprietary) convention to ease the human interpretation of the uids, like:

```
<unique abbreviation of the object type>--<number unique within the XML file>
```

For example, for a PartView instance: pv--4711

Since some PDM systems are not case-sensitive and import for example 'Part4711' as 'PART4711', it is recommended to handle all attributes as case insensitive, except:

- the File Id, ExternalItem.Id and ExternalItem.Source (because all Unix-based operating systems are case-sensitive)
- PropertyValue.Name (because e.g. in CATIA, "name" and "NAME" are two different attributes)

#### 4.1.2 Containment vs. Referencing

Containment is preferred over Referencing as far as possible, since it enables the storing of the maximum number of aspects of an object at one single place in the XML file. For example here is a Part with its PartVersion(s), PartView(s), Occurrences(s), Document(s)...:

```
<Part uid="p--000000001E60C660">  
  <Id>  
    <Identifier uid="pid--000000001E60C660--id6" id="bolt" idRoleRef="r1--  
ii" idContextRef="o--000000178"/>  
  </Id>  
  <Name>  
    <CharacterString>bolt</CharacterString>  
  </Name>  
  <PartTypes>  
    <ClassString>piece part</ClassString>  
  </PartTypes>  
  <Versions>  
    <PartVersion uid="pv--000000001E60C660--id6">
```

```
<Id id="/NULL"/>
  <Views>
    <PartView uid="pvv--000000001E60C660--id6">
      <InitialContext uidRef="ac--mechanicaldesign--design"/>
      <Occurrence xsi:type="n0:SingleOccurrence" uid="pi--
000000001E60C660--18">
        <Id id="bolt.1"/>
        </Occurrence>
        <DocumentAssignment xsi:type="n0:DocumentAssignment" uid="da--
000000001E60C660--id6">
          <AssignedDocument uidRef="df--000000001E60C660"/>
          <Role>
            <ClassString>mandatory</ClassString>
          </Role>
        </DocumentAssignment>
      </PartView>
    </Views>
  </PartVersion>
</Versions>
</Part>
```

On the other hand, referenced instances would be spread all over the XML file.

Containment is used for context dependent objects which cannot exist without the container object. Reference is used for objects that can exist on their own; they may be reference multiple times (reused), which avoids duplication of data.

The type of all referenced instances (defined as "cmn:Reference") and contained instances can be validated by the XSD.

### 4.1.3 Root Objects and DataContainer

All the entities not being declared as contained in any XML element are defined as a subtype of cmn:BaseRootObject. Otherwise they are defined as a subtype of cmn:BaseObject.

Each Root Object is defined as an element of the so-called AP242DataContainer (defined as a subtype of cmn:DataContainer). The DataContainer is like a schema instance (contains instances of the entities defined in the BO Model EXPRESS schema according to their definition in the XSD), just like the Data section in a Part21 STEP Physical File.

An XML file may have one or many AP242DataContainers.

#### **Preprocessor Recommendations:**

Define all data into one single AP242DataContainer.

The order of the root objects is not critical (since defined as xsd:choice minOccurs="0" maxOccurs="unbounded"), but the order of the attributes and containments within each object is strictly defined in the BO Model XSD (as xsd:sequence). In case of inheritance, the ordering of the attributes is: first the attributes of the top level supertype, then the attributes of the next level supertype, etc... and at the end, the attributes of the instantiated subtype.

### 4.1.4 Subtyping

If a subtype shall be instantiated, the top-level supertype defined in the EXPRESS and XML schema shall be instantiated, followed by a subtyping clause xsi:type. For example, to instantiate the ComposedGeometricModel subtype of Representation:

```
<Representation uid="egm--1" xsi:type="n0:ComposedGeometricModel">
```

## 4.1.5 Header object

### ***Preprocessor Recommendations:***

The header is mandatory and shall contain at least the following information:

- Name: name of the XML file
- TimeStamp: creation (or last modification date) of the XML file
- Organization.Name: name of the sending organization. Use the same unique ID conventions as for the Id of the template “Organization”
- PreprocessorVersion: name and release of the Preprocessor
- OriginatingSystem: name and release of the originating system
- Documentation[1]: version of the Recommended Practices used to implement the preprocessor
- (optionally) Documentation[2-n]: some free texts explaining the contents of the exchange file

Here is an example:

```
<Header xmlns="">
  <Name>as1.stpx</Name>
  <TimeStamp>2020-10-01T09:54:06Z</TimeStamp>
  <Organization>
    <Name>mercedes-benz.com</Name>
  </Organization>
  <PreprocessorVersion>T-Systems International GmbH COM/FOX V6.1.4</PreprocessorVersion>
  <OriginatingSystem>CATIA V5 B25 SP0 HF0</OriginatingSystem>
  <Documentation>CAx-IF Rec.Pracs.---AP242 BO Model XML
Assembly Structure---2.2---2020-09-30</Documentation>
  <Documentation>free text 1</Documentation>
  <Documentation>free text 2</Documentation>
  ...
</Header>
```

### ***Remarks:***

- The organization mentioned in the header is not necessarily redundant with the one mentioned in ExchangeContext.IdentificationContext: for example, if a tier-1 supplier forwards data from its customer to a tier-2 supplier, forwarding the identifiers from the customer, the IdentificationContext will be the one of the customer while the organization in the header will be the tier-1 supplier
- The version of the AP242 BO Model XSD doesn't need to be defined here, since it is already defined in the top line of the XML file (see next section).
- “Documentation” is a set. The following pattern is recommended:
  - First occurrence of “Documentation”: (mandatory) version of the Recommended Practices used to implement the preprocessor
  - Further occurrences of “Documentation”: (optional) free texts explaining the contents of the exchange file

## 4.1.6 XML context tagging

Using the appropriate scoping, lots of XML context tagging may be avoided.

### **Preprocessor Recommendations:**

Use the following definition to enclose all schema definitions needed by the BO Model XML file:

```
<n0:Uos
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xmlns:n0="http://standards.iso.org/iso/ts/10303/-3001/-ed-2/tech/xml-
schema/bo_model"
xmlns:cmn="http://standards.iso.org/iso/ts/10303/-3000/-ed-2/tech/xml-
schema/common"
xsi:schemaLocation="http://standards.iso.org/iso/ts/10303/-3001/-ed-
2/tech/xml-schema/bo_model http://standards.iso.org/iso/ts/10303/-3001/-ed-
2/tech/xml-schema/bo_model/bom.xsd">
...
<Header>
...
  </Header>
  <DataContainer xsi:type="n0:AP242DataContainer">
    ...
  </DataContainer>
</n0:Uos>
```

Avoid defining namespaces in the DataContainer.

The only case within the data where context tagging is needed is ,n0' for the subtype clauses like `xsi:type="n0:ComposedGeometricModel"`.

## 4.1.7 Schema version and document version identifications

The name of the schema that an AP242 BO Model XML file shall be compliant to shall be listed at the beginning of the uos element.

Example: To indicate AP242 BO model XML version 2.0, the following URL is used:

```
xsi:schemaLocation="http://standards.iso.org/iso/ts/10303/-3001/-ed-
2/tech/xml-schema/bo_model http://standards.iso.org/iso/ts/10303/-3001/-ed-
2/tech/xml-schema/bo_model/bom.xsd">
```

## 4.1.8 Dates

Unlike in the EXPRESS schema definition of DateTimeString, the time is not optional in XML using `xsd:dateTime`.

### **Preprocessor Recommendations:**

If not available, set the time to T00:00:00, for example: 2010-08-19T00:00:00

## 4.1.9 STEP BO Model XML File Extensions

It was agreed by implementors and users alike that the default file extension “\*.xml” is too generic, since there are so many XML files for a wide variety of purposes and applications already using the extension. Since STEP BO Model XML files oftentimes are process-relevant, they should be easily identifiable, and it should be possible to associate a default handling application.

Since “\*.stp” shall remain reserved for STEP Part 21 files and the previously proposed “\*.stpxml” seemed to ungainly, the CAx-IF agreed to consistently use the following file extensions:

- “\*.stpx” – for STEP (AP209, AP242,...) BO Model XML files
- “\*.stpxZ” – for compressed STEP BO Model XML files

The compression of STEP files – Part 21 as well as BO Model XML – is defined in the CAX-IF Recommended Practices for STEP File Compression (see Annex C).

## 4.2 Rules for Attribute Cardinality

### 4.2.1 Entities and Attributes not supported by the Preprocessor

The guidance provided in this section reuses the “General Information” section of the PDM Schema Usage Guide V4.3 and adds recommendations for derived attributes and for mandatory numerical attributes.

For various reasons, there may be entities that cannot be completely exported by a preprocessor. For example, an application may not maintain all the information that is mandatory for data exchange according to this specification. Or, the information is maintained by a sending system, but it will for some reasons not be included in the data exchange file. The preprocessor shall provide values for all mandatory attributes in an exchange file.

For mandatory string-value attributes, special values shall be used to further indicate the reason why no real data is provided according to the following convention:

- For string-value attributes: empty string `<tag></tag>` or `<tag/>` indicates user data managed by the sending system but having an empty value. So, the receiver may interpret it in a different way than if the tag was not mentioned at all (unset value).
- For string-value attributes: string `<tag>/NULL</tag>` indicates user data in a mandatory attribute that is not managed by the sending system, or currently not known.

Mandatory base identifiers like `Organization.Id`, `Class.Id`, `Part.Id`, `Document.Id`, `File.Id`, ... shall not be mapped to `/NULL`, `/ANY` nor `/UNSET`.

If an attribute is required or recommended to be unique (for example `Occurrence.Id`), it is not recommended to set it to `/NULL`, `/ANY` nor `/UNSET`. since the sender should be aware that what he sends may not necessarily be interpreted correctly. If set to `/NULL`, `/ANY` or `/UNSET`., the receiving system may have to construct an `Id` in some way to achieve uniqueness.

If an object with version `/NULL` is encountered on import, it shall be mapped to the highest existing version (if not frozen), or a new version shall be created with the next-higher available version id.

- For string-value attributes: string `<tag>/ANY</tag>` indicates that the value – mandatory or optional - may be computed by the target system (for example `PartVersion.Id` if the assembly structure of the source system stores only the part number of the component and computes the right `PartVersion` at runtime).
- For string-value attributes: string `<tag>/UNSET</tag>` indicates that an entity as a whole is not supported by a pre-processor, but is mandatory according to the XML Schema => all its mandatory string attributes are set to `/UNSET`. This may apply for example to `DateAndPersonOrganization.PersonOrOrganization`.

Accordingly, it is not recommended to use the empty string or the default strings `/ANY`, `/UNSET` and `/NULL` as valid user data.

For mandatory `INTEGER`, `REAL` or `NUMBER` attributes, `2147483647 (MAX_LONG)` indicates user data in a mandatory attribute that is not managed by the sending system or currently not known.



For mandatory Date attributes, 1970-01-01T00:00:00 indicates user data in a mandatory attribute that is not managed by the sending system or currently not known.

Accordingly, it is not recommended to use 2147483647 or 1970-01-01T00:00:00 as valid user data. Dates older or newer than 1970-01-01T00:00:00 shall be interpreted as user data.

For further mandatory non-string value attributes, these recommended practices do not provide further guidance.

If an optional attribute is not instantiated, the corresponding element shall be completely removed from the physical file. Though not recommended, it is also valid to list the element start and end tags without providing any value.

#### 4.2.2 Entities and Attributes not supported by the Postprocessor

The guidance provided in this section corresponds with the “General Information” section of the PDM Schema Usage Guide V4.3.

For various reasons, there may be entities that cannot be completely imported by a postprocessor. The postprocessor translator implementation may not support the import of the entity. Or, the receiving system may not maintain the information that is carried by an entity or attribute, or it may require specific attribute values that are not present in the input data.

The names of entities and attributes not imported should be recorded in a history log file together with a reason. Entities and attributes not supported by the receiving system shall not cause a system failure. The minimum acceptable behavior shall be to ignore the unsupported constructs gracefully.

#### 4.2.3 Unspecified and Optional Attribute Values

The guidance provided in this section corresponds with the “General Information” section of the PDM Schema Usage Guide V4.3.

Optional attributes without specific recommended values, such as the description attribute, are available on many entities in the AP242 BO Model. The following general recommendation for the use of this type of attribute is given:

**Preprocessor** - First, follow the usage guide as much as is possible. If some specific common harmonized user requirement has been documented in the usage guide for the type of attribute, adapt this requirement to the attributes in question (i.e., map the standard into your domain). If no specific common harmonized user requirement has been documented in the usage guide, in general, such an optional attribute should not be instantiated. However, these attributes may be used in some bilateral agreements between exchange partners.

**Postprocessor** - Any optional attribute with no specific mapping specified can, in general, not be specifically interpreted in an interoperable way. While these types of attributes are in general not recommended to be instantiated, the postprocessor should gracefully handle any data that is exchanged using these attributes. A robust, interoperable AP242 BO Model postprocessor will generally provide user access to also these values.

#### 4.2.4 Derived Attributes

The guidance provided in this section corresponds with the “General Information” section of the PDM Schema Usage Guide V4.3.

In general, derived attributes are not covered by this recommended practices document. This is consistent with the STEP part 21 and part 28 specifications where derived attributes are not represented in an exchange file. This document does not include cases of derived attributes where special attention is required.

### 4.3 Uniqueness of Identifiers

Two types of identifiers are distinguished:

- 1) Uid-identifier, which is assigned to each element in the XML-file and which plays the same role as the instance identifier in ISO 10303-21 files. This identifier shall be unique within a single file; they are not unique across several physical files, even though such files may form a consistent data package.
- 2) User-defined identifiers that are provided as part of the product data. These recommended practices do not require such identifier strings to be unique, neither globally nor within a single physical file. Thus, in the concurrent management of internal and external identifiers in a database, duplicate identifiers may occur.

NOTE: To ensure uniqueness of identification (for each single object type) the EXPRESS schema of the AP242 BO Model requires the combination of the values of the attributes `id`, `role` and `identificationContext` of instances of entity `Identifier` to be unique. See 4.6.6 for recommendations of instantiating entity `Identifier` in general; additional guidance may be given in the sections of entities that have attributes of type `Identifier`.

Remark: the Bugzilla issue [#5863](#) has been created in order to update the UNIQUE rule, and the Bugzilla issue [#8181](#) has been created in order to update the WHERE rule:

```
ENTITY Identifier;  
    Id: IdentifierString;  
    ClassifiedAs: OPTIONAL SET[1:?] OF Classification;  
    Role: ClassSelect;  
    IdentificationContext: OPTIONAL IdentificationContextSelect;  
  
UNIQUE  
    URL: Id, Role, IdentificationContext;  
  
WHERE  
    ContextlessForOrganizationOnly: NOT (NOT EXISTS(IdentificationContext)  
AND (SIZEOF(USEDIN(SELF, SCHEMA_NAME + 'ORGANIZATION.ID'))=0));  
END_ENTITY;
```

so that the UNIQUE rule doesn't apply one over all object types, for once for each single object types (i.e.: all `Part.Ids` shall be unique, all `Document.Ids` shall be unique, ...), and so that the WHERE rule is either removed or at least `Class.Id` may also be contextless for the recommended values for `idRoleRef` ('identification information', 'exchange identification information').

### 4.4 Project Specific Values

The guidance provided in this section corresponds with the "General Information" section of the PDM Schema Usage Guide V4.3.

Attribute values recommended in this usage guide shall be supported by systems that conform to the AP242 BO Model. Other values negotiated between exchange partners in specific projects may be used where the interpretation of their meaning does not contradict definitions provided in this usage guide. However, these agreements will generally not lead to interoperable solutions

## 4.5 Blanks in String Values

The guidance provided in this section corresponds with the “General Information” section of the PDM Schema Usage Guide V4.3.

All white space within the XML tag delimiters of a STRING value shall be considered valid user data, that is, also leading and trailing blanks are valid user data.

## 4.6 Basic Building Blocks

The objective of this chapter is to define the basic templates that will be reused in the representation of complex concepts (chapter 4.6.11 and following).

### 4.6.1 Template “ExchangeContext”

The `ExchangeContext` entity specifies a default context for the identifications and descriptions, a default language and a default length unit relevant for a defined context.

The `Description` provides the context of the exchange.

The `DefaultLanguage` sets the default language used in the exchanged file if no specific language information is provided.

The `DefaultUnit` sets the default length unit to be used for the exchanged file if no specific unit is provided.

The `IdentificationContext` sets the default organization managing the different id and description if no specific organization is provided.

### The Instance Model: AP242 BO Model XML entities and attributes

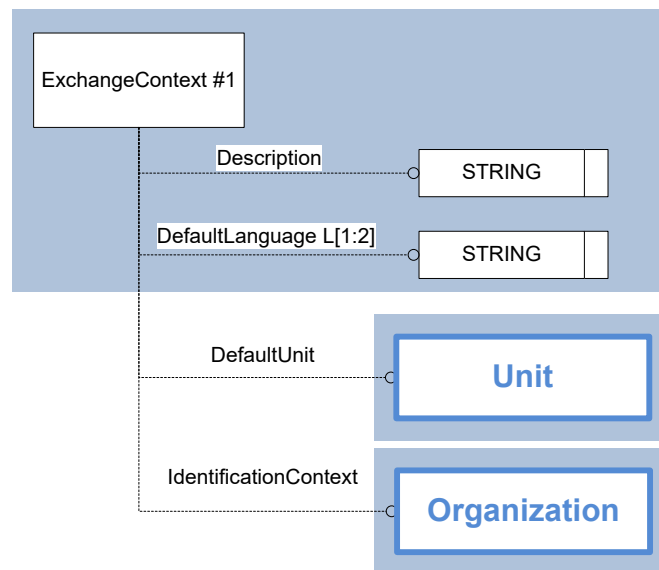


Figure 1: Template “ExchangeContext”

ENTITY ExchangeContext	Attribute Type
DefaultLanguage	OPTIONAL Language
DefaultUnit	OPTIONAL Unit
Description	OPTIONAL DescriptorSelect
IdentificationContext	OPTIONAL IdentificationContextSelect

Table 2: “ExchangeContext” Attributes

### **Attribute recommendation**

- The **Description** attribute is the text providing information on the exchange context. The value of this attribute need not be specified. Use “Description” template (see 4.6.7).
- The **DefaultLanguage** attribute is the set of text by which the default language is known. The value of this attribute need not be specified. Use xsd:language type. For more details, refer to chapter A.1.10.
- The **DefaultUnit** attribute characterizes a default length unit. The value of this attribute need not be specified. Use “Unit” template (see 4.6.3).
- The **IdentificationContext** attribute specifies a default organization. The value of this attribute need not be specified. Use “Organization” template (see 4.6.2).

Remark: Just as in the AP242 Specification, the XSD does not restrict the values in DefaultLanguage

### **Preprocessor Recommendations:**

- All preprocessors should provide a unique ExchangeContext.
- For the language definition (for example ‘en-US’), even if the country code (here ‘US’) is optional, it is recommended to set it
- As specified in the EXPRESS data model via a WHERE rule, at least one of the attributes DefaultLanguage or IdentificationContext shall be specified
- The organization referenced by ExchangeContext.IdentificationContext is not necessarily redundant with the one referenced by Identifier.idContextRef, even if the Identifiers have only one context: for example, ExchangeContext.IdentificationContext could largely be representing a sight, but, the data could be assigned to several organization and need not be always the sight.

### **Postprocessor Recommendations:**

- If no length unit is given the ExchangeContext.DefaultUnit shall be used (like in simplified positioning representation of assembly structure, see chapter 7.3.1).
- If no language is given for names, descriptions or StringValues, the DefaultLanguage should be set.

**Related Entities:** There are no specific related entities.

## **The Instance Model: STEP exchange file format (ISO10303 AP242 BO Model XML syntax)**

```
<ExchangeContext uid="ec--000000001">
  <DefaultLanguage>en-US</DefaultLanguage>
  <DefaultUnit uidRef="u--000000002"/>
  <Description>
    <CharacterString>AP242 BO Model XML Assembly Structure exchange</CharacterString>
  </Description>
  <IdentificationContext uidRef="o--000000178"/>
</ExchangeContext>
<Unit uid="u--000000002">
  <Kind>
    <ClassString>SI system</ClassString>
```

```

</Kind>
<Name>
  <ClassString>metre</ClassString>
</Name>
<Prefix>
  <ClassString>milli</ClassString>
</Prefix>
</Unit>
<Organization uid="o--000000178">
  <Id id="mercedes-benz.com"/>
  <Name>
    <CharacterString>Mercedes-Benz</CharacterString>
  </Name>
  <OrganizationTypes>
    <ClassString>company</ClassString>
  </OrganizationTypes>
</Organization>
  
```

#### 4.6.2 Template “Organization”

In the same way as in section 13.1.1 of the PDM Schema Usage Guide V4.3, the `Organization` entity represents a group of people (e.g., companies, countries, etc.).

The `Id` is very important providing unique identification to the organization or company; this attribute should be populated with unique data.

The `Name` attribute should contain the common nomenclature of the organization.

The `OrganizationTypes` attribute should contain a characterization of the type of the organization.

#### The Instance Model: AP242 BO Model XML entities and attributes

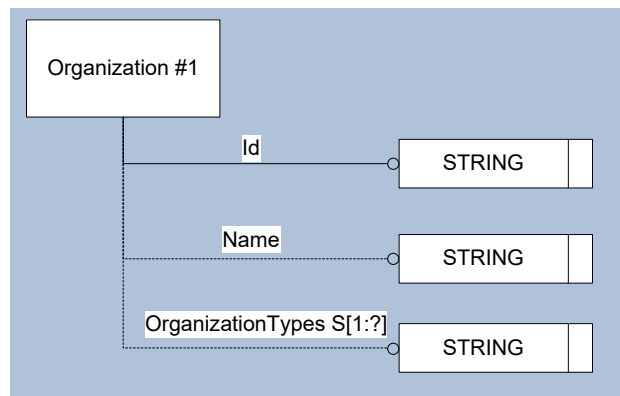


Figure 2: Template "Organization"

ENTITY Organization	Attribute Type
ClassifiedAs	OPTIONAL SET[1:?] of Classification
Description	OPTIONAL DescriptorSelect
Id	IdentifierSelect
Name	OPTIONAL DescriptorSelect
OrganizationTypes	OPTIONAL SET[1:?] of ClassSelect
ActivityAssignment	OPTIONAL SET[1:?] of ActivityAssignment
ActivityMethodAssignment	OPTIONAL SET[1:?] of ActivityMethodAssignment

ENTITY Organization	Attribute Type
AddressAssignment	OPTIONAL SET[1:?] of AddressAssignment
ContractAssignment	OPTIONAL SET[1:?] of ContractAssignment
DateAndPersonAssignment	OPTIONAL SET[1:?] of DateAndPersonAssignment
DateTimeAssignment	OPTIONAL SET[1:?] of DateTimeAssignment
DocumentAssignment	OPTIONAL SET[1:?] of DocumentAssignment
EventAssignment	OPTIONAL SET[1:?] of EventAssignment
FrozenAssignment	OPTIONAL SET[1:?] of FrozenAssignment
InformationUsageRightAssignment	OPTIONAL SET[1:?] of InformationUsageRightAssignment
OrganizationOrPersonInOrganizationAssignment	OPTIONAL SET[1:?] of OrganizationOrPersonInOrganizationAssignment
OrganizationRelationship	OPTIONAL SET[1:?] of OrganizationRelationship
SuppliedObjectRelationship	OPTIONAL SET[1:?] of SuppliedObjectRelationship
TimeIntervalAssignment	OPTIONAL SET[1:?] of TimeIntervalAssignment
WorkRequestAssignment	OPTIONAL SET[1:?] of WorkRequestAssignment

Table 3: “Organization” Attributes

**Attribute recommendation**

- The **Id** attribute is the identifier that distinguishes the organization. Use IdentifierString type.
- The **Name** attribute is the label by which the organization is known. The value of this attribute need not be specified. Use “Description” template (see 4.6.7).
- The **OrganizationTypes** attribute characterizes the type of organization. The value of this attribute need not be specified. Use ClassString if one of the values below is used, otherwise use “Class” template (see 4.6.4). According to the ISO AP242 Specification, where applicable, the following values shall be used:

OrganizationTypes	Explanation
'company'	The organizationTypes specifies that the Organization is a company
'department'	The organizationTypes specifies that the Organization is a department
'plant'	The organizationTypes specifies that the Organization is a plant

- Other attributes than these are not covered by these Recommended Practices; their use is discouraged as it would depend on mutual agreements between data exchange partners.

**Preprocessor Recommendations:** All preprocessors should provide a unique organization id to eliminate ambiguities where organizations may have the same names. If the intended domain for the data is large, the reader is referred to ISO/IEC 8824-1, which can provide some guidance on creating unique identifiers. If appropriate, a URL-like convention for the organization identifier may be used, e.g., cax-if.org. A unique string obtained under ISO/IEC 8824-1 can be used as, or prefixed to, the organization identifier. For example, if the organization

typically used an identifier of "93699" and the unique string were "USA", the unique value of the organization id would be "USA93699". If available and appropriate, the following values should be used to describe the organization type:

- 'company' to indicate a business entity;
- 'department' to indicate an organizational group within a company;
- 'plant' to indicate that the organization is a plant.

**Postprocessor Recommendations:** All postprocessors should make use of any provided information in the id attribute to eliminate ambiguities where organizations may have the same name.

**Related Entities:** There are no specific related entities.

### The Instance Model: STEP exchange file format (ISO10303 AP242 BO Model XML syntax)

```
<Organization uid="o--000000178">  
  <Id id="mercedes-benz.com"/>  
  <Name>  
    <CharacterString>Mercedes-Benz</CharacterString>  
  </Name>  
  <OrganizationTypes>  
    <ClassString>company</ClassString>  
  </OrganizationTypes>  
</Organization>
```

#### 4.6.3 Template "Unit"

This entity is a quantity chosen as a standard in terms of which other quantities may be expressed. The types of units supported are SI units as well as derived or conversion-based units as defined in ISO 10303-41. See Annex E for the recommendation of the Units definition.

The `Name` provides the type of the unit.

The `Kind` represents the type of system used.

The `Prefix` is the ratio of the unit.

### The Instance Model: AP242 BO Model XML entities and attributes

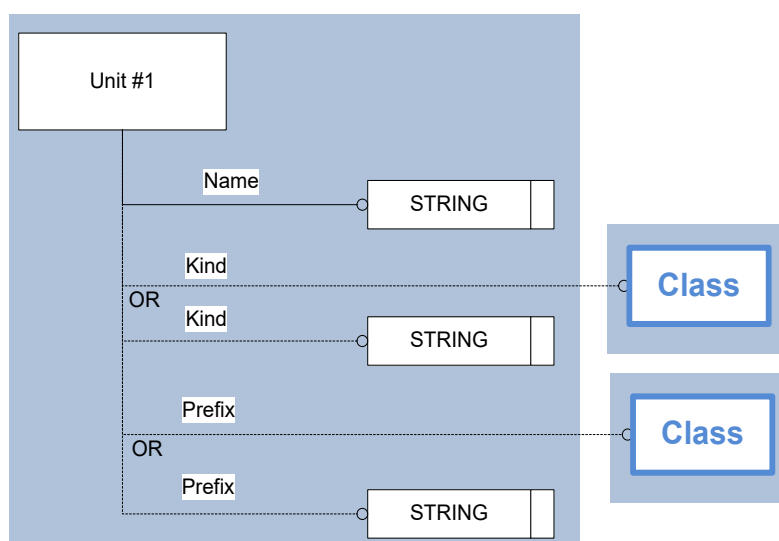


Figure 3: Template "Unit"



ENTITY Unit	Attribute Type
Kind	OPTIONAL ClassSelect
Name	ClassSelect
Prefix	OPTIONAL ClassSelect
Quantity	OPTIONAL ClassSelect

Table 4: "Unit" Attributes

### Attribute recommendations

- The **Name** attribute is the text defining the type of the unit. Use ClassString type.
- The **Kind** attribute is the type of system used. Use ClassString if one of the values below is used, otherwise use "Class" template (see 4.6.4). According to the ISO AP242 Specification, when applicable the 'SI System' value should be used, and according to the chapter E.2 the following values are also applicable: 'derived SI unit', 'unspecified SI derived unit', 'unspecified', 'imperial'.
- The **Prefix** attribute is the definition of the ratio. The value of this attribute need not be specified. Use ClassString if one of the values below is used, otherwise use "Class" template (see 4.6.4). According to the ISO AP242 Specification, when applicable the following values shall be used 'exa', 'peta', 'tera', 'giga', 'mega', 'kilo', 'hecto', 'deca', 'deci', 'centi', 'milli', 'micro', 'nano', 'pico', 'femto', 'atto'.
- The **Quantity** attribute is the type of property that the **Unit** shall be used for. Use ClassString. Refer to the chapter Annex E for the recommended values.
- Other attributes than these are not covered by these Recommended Practices; their use is discouraged as it would depend on mutual agreements between data exchange partners.

**Preprocessor Recommendations:** The recommendation of the Units definition in Annex E lets the preprocessor free to use any prefix value recommended above.

**Postprocessor Recommendations:** The prefix shall be evaluated, and if necessary, the property value shall be converted into the appropriate prefix for the target system.

**Related Entities:** There are no specific related entities.

### The Instance Model: STEP exchange file format (ISO10303 AP242 BO Model XML syntax)

```
<Unit uid="u--000000002">
  <Kind>
    <ClassString>SI system</ClassString>
  </Kind>
  <Name>
    <ClassString>metre</ClassString>
  </Name>
  <Prefix>
    <ClassString>milli</ClassString>
  </Prefix>
</Unit>
```



#### 4.6.4 Template “Class”

This entity is a classification which characterizes all objects of the same kind.

The `Id` provides a unique identification to the classification; this attribute must be populated with unique data.

The `Description` attribute should contain the textual information concerning the class.

The `DefinedIn` attribute should reference a specific externally defined set of value.

#### The Instance Model: AP242 BO Model XML entities and attributes

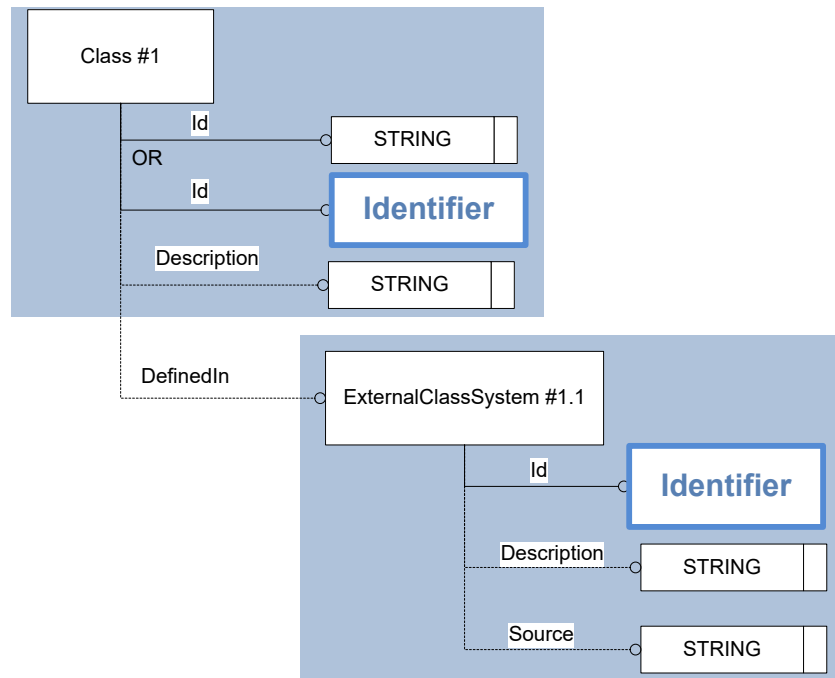


Figure 4: Template "Class"

ENTITY Class	Attribute Type
ClassAttribute	OPTIONAL SET[1:?] of ClassAttribute
DefinedIn	OPTIONAL ExternalClassSystem
Description	OPTIONAL DescriptorSelect
Id	IdentifierSelect
SetMembership	OPTIONAL SET[1:?] of SetMembership
SubsetMember	OPTIONAL SET[1:?] of SubsetMember
VersionId	OPTIONAL IdentifierSelect
ActivityAssignment	OPTIONAL SET[1:?] of ActivityAssignment
ApprovalAssignment	OPTIONAL SET[1:?] of ApprovalAssignment
DateAndPersonAssignment	OPTIONAL SET[1:?] of DateAndPersonAssignment
DateTimeAssignment	OPTIONAL SET[1:?] of DateTimeAssignment
DocumentAssignment	OPTIONAL SET[1:?] of DocumentAssignment

ENTITY Class	Attribute Type
EffectivityAssignment	OPTIONAL SET[1:?] of EffectivityAssignment
EventAssignment	OPTIONAL SET[1:?] of EventAssignment
FrozenAssignment	OPTIONAL SET[1:?] of FrozenAssignment
InformationUsageRightAssignment	OPTIONAL SET[1:?] of InformationUsageRightAssignment
OrganizationOrPersonInOrganizationAssignment	OPTIONAL SET[1:?] of OrganizationOrPersonInOrganizationAssignment
SuppliedObjectRelationship	OPTIONAL SET[1:?] of SuppliedObjectRelationship
TimeIntervalAssignment	OPTIONAL SET[1:?] of TimeIntervalAssignment

Table 5: "Class" Attributes

### Attribute recommendation

- The **Id** attribute is the identifier that distinguishes the class. Use IdentifierString type if the attribute DefinedIn is set or in case the Class is used to map one of the predefined values for idRoleRef within the "Identifier" template (see 4.6.6), otherwise use "Identifier" template (see 4.6.6).
- The **Description** attribute is the text by which the class is described. The value of this attribute need not be specified. Use "Description" template (see 4.6.7).
- The **DefinedIn** attribute specifies where is defined the type represented by the Id. The value of this attribute need not be specified. Reference to an ExternalClassSystem element.
- Other attributes than these are not covered by these Recommended Practices; their use is discouraged as it would depend on mutual agreements between data exchange partners.

ENTITY ExternalClassSystem	Attribute Type
Description	OPTIONAL DescriptorSelect
Id	IdentifierSelect
Source	OPTIONAL ExternalSourceSelect
ApprovalAssignment	OPTIONAL SET[1:?] of ApprovalAssignment
DateAndPersonAssignment	OPTIONAL SET[1:?] of DateAndPersonAssignment
DateTimeAssignment	OPTIONAL SET[1:?] of DateTimeAssignment
EffectivityAssignment	OPTIONAL SET[1:?] of EffectivityAssignment
EventAssignment	OPTIONAL SET[1:?] of EventAssignment
InformationUsageRightAssignment	OPTIONAL SET[1:?] of InformationUsageRightAssignment
OrganizationOrPersonInOrganizationAssignment	OPTIONAL SET[1:?] of OrganizationOrPersonInOrganizationAssignment
SecurityClassificationAssignment	OPTIONAL SET[1:?] of SecurityClassificationAssignment
SuppliedObjectRelationship	OPTIONAL SET[1:?] of SuppliedObjectRelationship
TimeIntervalAssignment	OPTIONAL SET[1:?] of TimeIntervalAssignment

Table 6: "ExternalClassSystem" Attributes

## Attribute recommendation

- The **Description** attribute is the text by which the external system is described. The value of this attribute need not be specified. Use “Description” template (see 4.6.7).
- The **Id** attribute is the identifier that distinguishes the external system. Use “Identifier” template (see 4.6.6).
- The **Source** attribute specifies where the external system is located. The value of this attribute need not be specified. Use IdentifierString type.
- Other attributes than these are not covered by these Recommended Practices; their use is discouraged as it would depend on mutual agreements between data exchange partners.

**Preprocessor Recommendations:** All preprocessors should provide unique class ids.

The ExternalClassSystem should be used when the Class.id value is not commonly agreed by the AP242 specification or recommended practices.

Classes commonly agreed by the AP242 specification do not need an identification context. This is why in this case, the use of IdentifierString for Class.Id is recommended where ClassString is not possible (i.e. for Identifier.IdRoleRef, see “Identifier” template 4.6.6).

The entity allows specifying all the values supported by the preprocessor and among them, those referenced by the exchanged assembly structure.

When the Classification.Role is used with the value ‘make or buy’, the following values shall be used for the attribute Id (according to value defined in 10303-41: product\_definition\_schema):

- ‘made’: characterize a product is to be manufactured within an organization;
- ‘bought’: characterize a product is to be bought;

**Postprocessor Recommendations:** None specified.

**Related Entities:** There are no specific related entities.

## The Instance Model: STEP exchange file format (ISO10303 AP242 BO Model XML syntax)

```
<ExternalClassSystem uid="ecs--fdf">
  <Id>
    <Identifier uid="fdf--filedataformat-id1" id="file data format" idRoleRef="„rl--ii" idContextRef="o--000000178"/>
  </Id>
</ExternalClassSystem>

<Class uid="fdf--CGR">
  <DefinedIn uidRef="ecs--fdf"/>
  <Id id="CGR"/>
</Class>

<FormatProperty uid="ffp--CGR">
...
  <DataFormat>
    <Class uidRef="fdf--CGR"/>
  </DataFormat>
</FormatProperty>
```

#### 4.6.5 Template “Classification”

This entity permits the attachment of a Class to one or more objects.

The `Role` provides the meaning of the association.

The `Class` attribute provides the classification information.

#### The Instance Model: AP242 BO Model XML entities and attributes

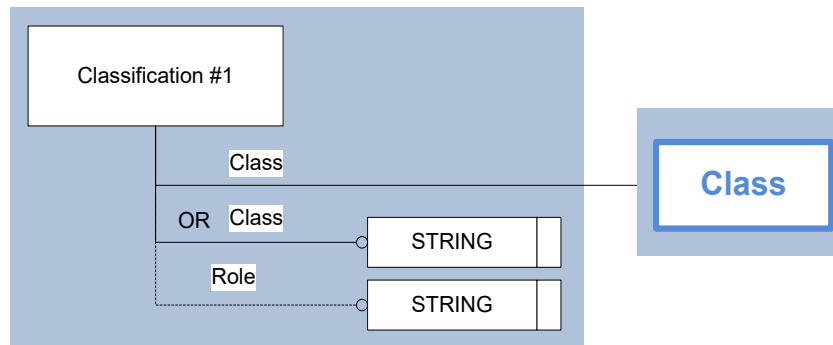


Figure 5: Template "Classification"

ENTITY Classification	Attribute Type
Class	ClassSelect
Role	OPTIONAL String
ApprovalAssignment	OPTIONAL SET[1:?] of ApprovalAssignment
ClassificationRelationship	OPTIONAL SET[1:?] of ClassificationRelationship
ContractAssignment	OPTIONAL SET[1:?] of ContractAssignment
DateAndPersonAssignment	OPTIONAL SET[1:?] of DateAndPersonAssignment
DateTimeAssignment	OPTIONAL SET[1:?] of DateTimeAssignment
DocumentAssignment	OPTIONAL SET[1:?] of DocumentAssignment
EventAssignment	OPTIONAL SET[1:?] of EventAssignment
InformationUsageRightAssignment	OPTIONAL SET[1:?] of InformationUsageRightAssignment
OrganizationOrPersonInOrganizationAssignment	OPTIONAL SET[1:?] of OrganizationOrPersonInOrganizationAssignment
SecurityClassificationAssignment	OPTIONAL SET[1:?] of SecurityClassificationAssignment
TimeIntervalAssignment	OPTIONAL SET[1:?] of TimeIntervalAssignment

Table 7: "Classification" Attributes

#### Attribute recommendation

- The **Class** attribute is the reference to the classification. Use `ClassString` if the value is recommended within this document (for example for `Filecontent.GeometryTypes`), otherwise use "Class" template (see 4.6.4).

- The **Role** attribute is the text that defines the role of the association of the class to an object. The value of this attribute need not be specified. Use “Description” template (see 4.6.7).
- Other attributes than these are not covered by these Recommended Practices; their use is discouraged as it would depend on mutual agreements between data exchange partners.

**Preprocessor Recommendations:** When applicable, the following values shall be used for the attribute Role:

- ‘electromagnetic compatibility’: The classification categorizes the classified element in respect of its ability to comply with requirements concerning electromagnetic interference
- ‘environmental conditions’: The classification categorizes the classified element with respect to its ability to comply with environmental impact requirements.
- ‘make or buy’: The classification categorizes the classified element with respect to its provenance, the company made the element or bought it.

**Postprocessor Recommendations:** None specified.

**Related Entities:** There are no specific related entities.

### The Instance Model: STEP exchange file format (ISO10303 AP242 BO Model XML syntax)

```
<Classification uid="vda--SpecifiedReference">  
  <Class>  
    <ClassString>specified reference</ClassString>  
  </Class>  
</Classification>
```

#### 4.6.6 Template “Identifier”

The identifier supports the ability to uniquely identify an object via a combination of three criteria: id, role and context.

The `id` is very important providing unique identification to the related object.

The `idRoleRef` attribute should refer a Class managing the role of the identification.

The `idContextRef` attribute should be set and refer the organization managing the id (in case of a root object) or refer one of the identifiers of the root object (in case of an embedded object).

### The Instance Model: AP242 BO Model XML entities and attributes

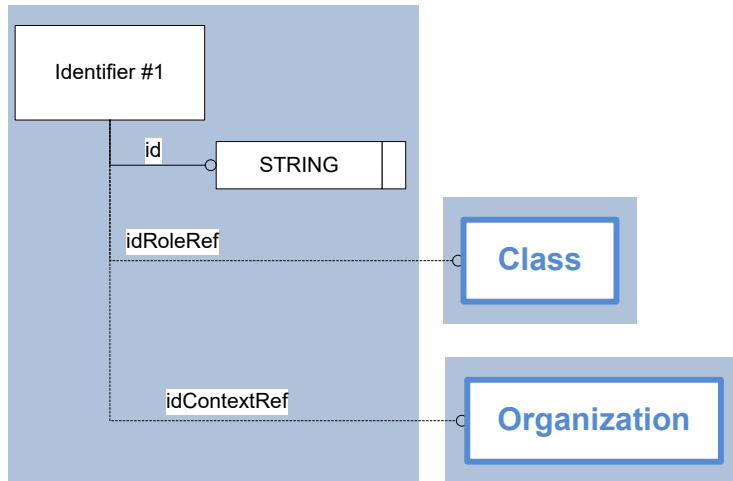


Figure 6: Template "Identifier"

ENTITY Identifier	Attribute Type
ClassifiedAs	OPTIONAL SET[1:?] of Classification
ApprovalAssignment	OPTIONAL SET[1:?] of ApprovalAssignment
ContractAssignment	OPTIONAL SET[1:?] of ContractAssignment
DateAndPersonAssignment	OPTIONAL SET[1:?] of DateAndPersonAssignment
DateTimeAssignment	OPTIONAL SET[1:?] of DateTimeAssignment
DocumentAssignment	OPTIONAL SET[1:?] of DocumentAssignment
EffectivityAssignment	OPTIONAL SET[1:?] of EffectivityAssignment
EventAssignment	OPTIONAL SET[1:?] of EventAssignment
IdentifierRelationship	OPTIONAL SET[1:?] of IdentifierRelationship
InformationUsageRightAssignment	OPTIONAL SET[1:?] of InformationUsageRightAssignment
OrganizationOrPersonInOrganizationAssignment	OPTIONAL SET[1:?] of OrganizationOrPersonInOrganizationAssignment
SecurityClassificationAssignment	OPTIONAL SET[1:?] of SecurityClassificationAssignment
TimeIntervalAssignment	OPTIONAL SET[1:?] of TimeIntervalAssignment
Id	OPTIONAL String
idRoleRef	ClassSelect
idContextRef	OPTIONAL IdentificationContextSelect

Table 8: "Identifier" Attributes

## Attribute recommendations

- The **id** attribute is the text that represents an identifying name or code. Use IdentifierString type.
- The **idRoleRef** attribute is the text that defines the role of the identifier. The value of this attribute should be specified. Use “Class” template (see 4.6.4) and the following value:
  - ‘identification information’: the id identifies the object.
  - ‘exchange identification information’: the id identifies the object along the exchange process.

For each idContextRef value, one any only one of these two roles is mandatory:

- idRoleRef ‘identification information’: for example, with an internal uid for the object in the PDM system used at the company idContextRef.
- idRoleRef ‘exchange identification information’: for example, with a readable part number in the context of idContextRef

If an object has multiple contexts, one and only one identifier should have the role ‘exchange identification information’

- The **idContextRef** attribute is the context within which the **Identifier** has been created and is unique. The value of this attribute should be specified. Use “Organization” template (see 4.6.2) for root objects or “Identifier” template (this section) for embedded objects (see complex example in 5.1.6).
- Other attributes than these are not covered by these Recommended Practices; their use is discouraged as it would depend on mutual agreements between data exchange partners.

**Remark:** since the EXPRESS attributes ‘role’ and ‘identificationContext’ have been mapped to XML attributes (and not XML elements) for a compact representation as this object is frequently used, it is not possible to distinguish between ClassString and a reference to a Class/ExternalClass/ExternalOwlClass, resp. between IdentifierString and a reference to an Identifier/Organization. This is why they have been renamed to idRoleRef and idContextRef and shall not be mapped to a String (the XSD checks that they contain an uid).

**Preprocessor Recommendations:** All preprocessors should ensure the uniqueness of the combination of id, idRoleRef and idContextRef. For a given context, only one id shall have the role ‘identification information’ or ‘exchange identification information’ (both roles shall not occur in parallel)

To map further ids for the same context, dedicated roles shall be defined and agreed between the exchange partners. According to the “Class” Template (see 4.6.4), such dedicated roles shall be mapped as a Class with an ExternalClassSystem.

In the case where the root object and its embedded objects have all the same context and only one role, embedded objects are already identified through their root object => IdentifierString can be used alternatively to Identifier.

If Identifier is used for an embedded object its idContextRef shall reference one of the Identifiers of its root object, and the idRoleRef value (‘identification information’ or ‘exchange identification information’) shall be the same in the embedded object and in its idContextRef. This recommendation does not apply necessarily to dedicated roles (for example the system internal object Id of PartVersion (idRoleRef=‘unique object identification information’) could be defined having an Organization as ifContextRef).



In the XML format, it is possible to duplicate the identification in the Id.id attribute and in the Identifier.id attribute. This usage is not recommended since it is not possible in the EXPRESS definition of the AP242 BO Model. All preprocessors must avoid it. The Id.id shall only be used in special cases like Organization.Id

This has been documented in BugZilla [#5884](#).

**Postprocessor Recommendations:** If a target system does not support multiple identifiers, at least the one having the role 'exchange identification information' shall be imported. If none of them have this role, the one having the context of the receiver organization should be chosen. This is especially important if the data exchange is bidirectional and the data loops between the partners.

If an embedded object has less Identifier contexts than its root object, the missing Identifiers can be interpreted as '/NULL'.

**Related Entities:** There are no specific related entities.

## The Instance Model: STEP exchange file format (ISO10303 AP242 BO Model XML syntax)

This example shows the simple case where only one context is involved:

```
<Class uid="rl--ii">
  <Id id="identification information"/>
</Class>
<Organization uid="o--000000178">
  <Id id="mercedes-benz.com"/>
  <Name>
    <CharacterString>Mercedes-Benz</CharacterString>
  </Name>
  <OrganizationTypes>
    <ClassString>company</ClassString>
  </OrganizationTypes>
</Organization>
<Part uid="p--000000001E60C660">
  <Id>
    <Identifier uid="pid--000000001E60C660--id6" id="bolt" idRoleRef=",,rl--ii" idContextRef="o--000000178"/>
  </Id>
  ...
  <Versions>
    <PartVersion uid="pv--000000001E60C660">
      ...
      <Id id="A.1"/>
      ...
    </PartVersion>
  </Versions>
  ...
</Part>
```

**Comment: according to the XSD:**

```
<xsd:complexType name="Id">
  <xsd:sequence>
    <xsd:element name="Identifier" type="Identifier" minOccurs="0"
maxOccurs="unbounded"/>
  </xsd:sequence>
```

```
        <xsd:attribute name="id" type="xsd:string" use="optional"/>
    </xsd:complexType>
    <xsd:complexType name="Identifier">
        <xsd:complexContent>
            <xsd:extension base="cmn:BaseObject">
                <xsd:sequence>
...
                    <xsd:attribute name="id" type="xsd:string" use="optional"/>
...
                </xsd:extension>
            </xsd:complexContent>
        </xsd:complexType>
```

Both elements `id` (as `xsd:string` in `Identifier` and in `Id`) can be set in parallel, while according to the EXPRESS schema only one is possible (More information available in the document ISO 10303-3001 BO Model in the Annex B.1.9 “Representation of Id Attribute”):

```
TYPE SingleIdentifierSelect = SELECT(
    Identifier,
    IdentifierString
);
END_TYPE;
```

#### 4.6.7 Template “Description”

If only one language is considered, the description shall be set with the `CharacterString` type. The applying language is implicitly the one defined in the `ExchangeContext`.

If multiple languages are to be exchanged for one description, `LocalizedString`s shall be defined as described in A.1.10.

Remark: for a better readability, the instantiation figures included in the recommended practices only consider the simple case ‘`CharactString`’.

#### **Preprocessor Recommendation:**

- If `LocalizedString`s are used (i.e. if multiple languages are supported), at least the default language defined in the `ExchangeContext` should be provided, while further languages may be provided or omitted for each `Description`.
- If `LocalizedString`s are used and there is no value set for the default language in the `ExchangeContext`, at least one common language shall occur in all `Descriptions`.
- It is not recommended to set `LocalizedString.uid` (inherited from `BaseObject`, but optional here)

#### **Postprocessor Recommendations:**

- If a target system does not support multiple languages for some attributes of type `Description`, one language (one of the `LocalizedString`s) has to be picked out (if provided, accordingly to the default language defined in the `ExchangeContext`, otherwise freely chosen among all available languages).

#### 4.6.8 Template “ViewContext”

In the same way than in section 1.1.2.4 of the PDM Schema Usage Guide V4.3, the `ViewContext` entity identifies a universe suitable for the description of parts.

The `Description` provides further information about the type of view defined.

The `ApplicationDomain` attribute contains the application domain information.

The `LifeCycleStage` attribute contains the life cycle stage information.

## The Instance Model: AP242 BO Model XML entities and attributes

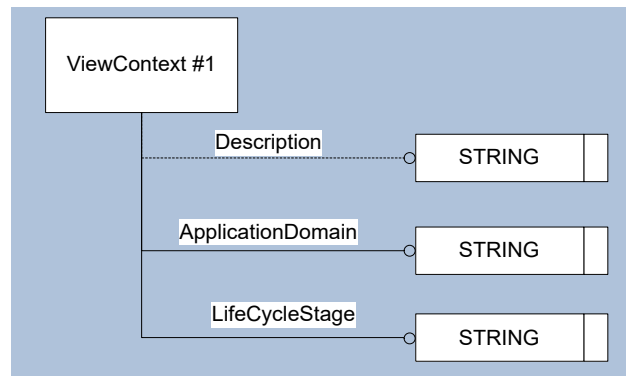


Figure 7: Template "ViewContext"

ENTITY ViewContext	Attribute Type
ApplicationDomain	ApplicationDomainSelect
Description	OPTIONAL DescriptorSelect
LifeCycleStage	LifeCycleStageSelect
ApprovalAssignment	OPTIONAL SET[1:?] of ApprovalAssignment
DocumentAssignment	OPTIONAL SET[1:?] of DocumentAssignment

Table 9: "ViewContext" Attributes

### Attribute recommendations

- The **Description** attribute is the text by which the type is described. The value of this attribute need not be specified. Use "Description" template (see 4.6.7).
- The **ApplicationDomain** attribute is the text representing the application domain. Use ProxyString type.
- The **LifeCycleStage** attribute is the text representing the life cycle stage. Use ProxyString type.
- Other attributes than these are not covered by the Recommended Practices; their use is discouraged as it would depend on mutual agreements between data exchange partners.

**Preprocessor Recommendations:** The Description attribute provides a distinction on the type of view on a part version ('part definition') from one of a document version ('digital document definition', 'physical document definition'). This attribute may also indicate other types of definitions: e.g., functional, or spatial and/or zonal.

Recommended values for ApplicationDomain include 'assembly study', 'digital mock-up', 'electrical design', 'mechanical design', 'preliminary design', 'process planning', 'product delivery', 'product support' and 'not specific'.

Recommended values for LifeCycleStage include 'design', 'manufacturing planning', 'manufacturing realization', 'documentation'/certification', 'built'/manufactured', 'delivery', 'support', 'recycling' and 'not specific'.

For the recommended combinations of values for ApplicationDomain and LifeCycleStage, refer to the management of complex structure with different views (15.1).

All preprocessors should ensure that the LifeCycleStage is unique over the Initial/Additional-Contexts of a PartView.

**Postprocessor Recommendations:** Postprocessors should interpret the value of the description attribute as a type distinction between various definitions of parts and documents. The LifeCycleStage attribute value may be interpreted as the relevant viewpoint from which the data is valid.

**Related Entities:** There are no specific related entities.

### The Instance Model: STEP exchange file format (ISO10303 AP242 BO Model XML syntax)

```
<ViewContext uid="vc--000000781">
  <ApplicationDomain>
    <ProxyString>mechanical design</ProxyString>
  </ApplicationDomain>
  <LifeCycleStage>
    <ProxyString>design</ProxyString>
  </LifeCycleStage>
</ViewContext>
```

#### 4.6.9 Template “NumericalValue”

The NumericalValue is a subtype of ValueWithUnit representing a textual definition and a numerical value associated to a Unit type.

The Definition provides textual information on the property.

The Name provides the identification of the property.

The Unit specifies in which the ValueComponent is expressed.

The ValueComponent is the quantity.

### The Instance Model: AP242 BO Model XML entities and attributes

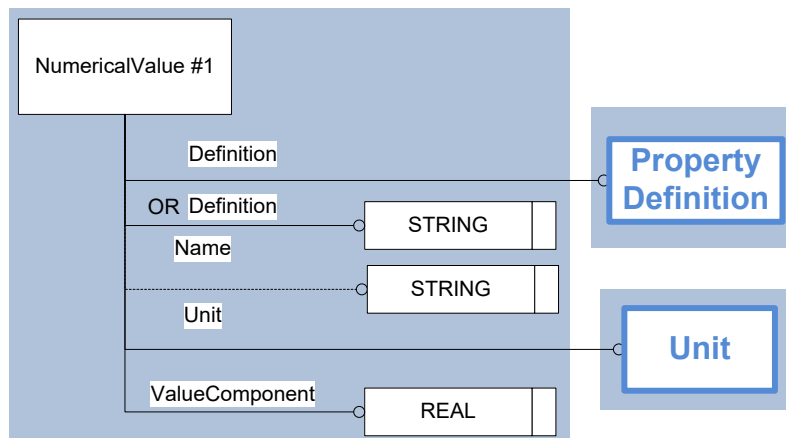


Figure 8: Template “NumericalValue”

ENTITY NumericalValue	Attribute Type
ClassifiedAs	OPTIONAL SET[1:?] of Classification
Definition	PropertyDefinitionSelect
DeterminationMethod	OPTIONAL ClassSelect
Name	OPTIONAL DescriptorSelect
Qualifications	OPTIONAL MeasureQualification

ENTITY NumericalValue	Attribute Type
ActivityAssignment	OPTIONAL SET[1:?] of ActivityAssignment
ApprovalAssignment	OPTIONAL SET[1:?] of ApprovalAssignment
DateAndPersonAssignment	OPTIONAL SET[1:?] of DateAndPersonAssignment
DateTimeAssignment	OPTIONAL SET[1:?] of DateTimeAssignment
DocumentAssignment	OPTIONAL SET[1:?] of DocumentAssignment
EffectivityAssignment	OPTIONAL SET[1:?] of EffectivityAssignment
EventAssignment	OPTIONAL SET[1:?] of EventAssignment
FrozenAssignment	OPTIONAL SET[1:?] of FrozenAssignment
InformationUsageRightAssignment	OPTIONAL SET[1:?] of InformationUsageRightAssignment
OrganizationOrPersonInOrganizationAssignment	OPTIONAL SET[1:?] of OrganizationOrPersonInOrganizationAssignment
ProjectAssignment	OPTIONAL SET[1:?] of ProjectAssignment
PropertyValueRelationship	OPTIONAL SET[1:?] of PropertyValueRelationship
TimeIntervalAssignment	OPTIONAL SET[1:?] of TimeIntervalAssignment
SignificantDigits	Optional Integer
Unit	UnitSelect
ValueComponent	Double
ValueContext	OPTIONAL NumericalContext

Table 10: "NumericalValue" Attributes

### Attribute recommendations

- The **Definition** attribute is the description of the property. In the case of system property, PDM property, User Defined attributes (see chapter 12), general shape definition properties (see section 6.3.1) or validation properties (see chapter 0), use "PropertyDefinition" template (see 12.2), otherwise (for example FileSize or Quantity) use PropertyDefinitionString type.
- The **Name** attribute is the text by which the property is known. The value of this attribute shall be specified. Use "Description" template (see 4.6.7).
- The **Unit** attribute is the Unit of the expressed value. Use "Unit" template (see 4.6.3).
- The **ValueComponent** attribute is the Double representing the quantity.
- Other attributes than these are not covered by these Recommended Practices; their use is discouraged as it would depend on mutual agreements between data exchange partners.

**Preprocessor Recommendations:** None specified.

**Postprocessor Recommendations:** None specified.

**Related Entities:** There are no specific related entities.

## The Instance Model: STEP exchange file format (ISO10303 AP242 BO Model XML syntax)

```

<Unit uid="u--000000003">
  <Kind>
    <ClassString>SI system</ClassString>
  </Kind>
  <Name>
    <ClassString>byte</ClassString>
  </Name>
  <Prefix>
    <ClassString>kilo</ClassString>
  </Prefix>
</Unit>
<File xsi:type="n1:DigitalFile" uid="df--0000000088">
  <FileSize uid="fsp--1">
    <FileSize xsi:type="n0:NumericalValue">
      <Definition>
        <PropertyDefinitionString>file size property</PropertyDefinitionString>
      </Definition>
      <Name>
        <CharacterString>file size</CharacterString>
      </Name>
      <Unit uidRef="u--000000003"></Unit>
      <ValueComponent>46</ValueComponent>
    </FileSize>
  </FileSize>
</File>
  
```

### 4.6.10 Template "StringValue"

The StringValue is a subtype of PropertyValue representing a textual definition and a text value.

The Definition provides textual information on the property.

The Name provides the identification of the property.

The ValueComponent is the representation of the value.

### The Instance Model: AP242 BO Model XML entities and attributes

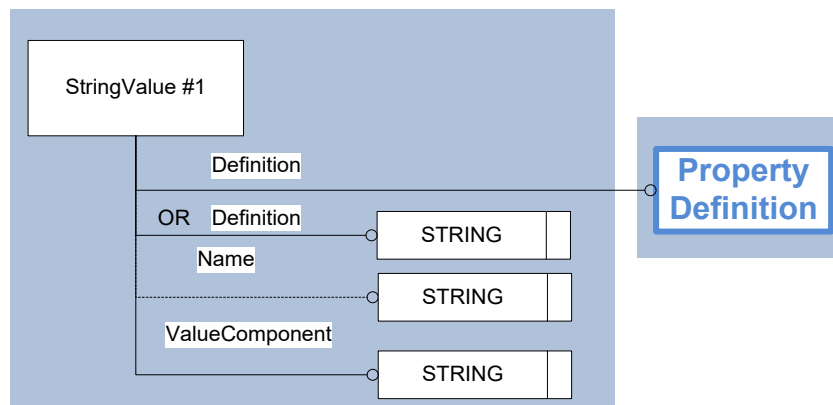


Figure 9: Template "StringValue"

ENTITY StringValue	Attribute Type
ClassifiedAs	OPTIONAL SET[1:?] of Classification
Definition	PropertyDefinitionSelect
DeterminationMethod	OPTIONAL ClassSelect
Name	OPTIONAL DescriptorSelect
Qualifications	OPTIONAL MeasureQualification
ActivityAssignment	OPTIONAL SET[1:?] of ActivityAssignment
ApprovalAssignment	OPTIONAL SET[1:?] of ApprovalAssignment
DateAndPersonAssignment	OPTIONAL SET[1:?] of DateAndPersonAssignment
DateTimeAssignment	OPTIONAL SET[1:?] of DateTimeAssignment
DocumentAssignment	OPTIONAL SET[1:?] of DocumentAssignment
EffectivityAssignment	OPTIONAL SET[1:?] of EffectivityAssignment
EventAssignment	OPTIONAL SET[1:?] of EventAssignment
FrozenAssignment	OPTIONAL SET[1:?] of FrozenAssignment
InformationUsageRightAssignment	OPTIONAL SET[1:?] of InformationUsageRightAssignment
OrganizationOrPersonInOrganizationAssignment	OPTIONAL SET[1:?] of OrganizationOrPersonInOrganizationAssignment
ProjectAssignment	OPTIONAL SET[1:?] of ProjectAssignment
PropertyValueRelationship	OPTIONAL SET[1:?] of PropertyValueRelationship
TimeIntervalAssignment	OPTIONAL SET[1:?] of TimeIntervalAssignment
ValueComponent	MultiLingualStringSelect

Table 11: "StringValue" Attributes

### Attribute recommendations

- The **Definition** attribute is the definition of the property. In the case of e of system property, PDM property, User Defined attributes (see chapter 12), general shape definition properties (see section 6.3.1) or validation properties (see chapter 0), use "PropertyDefinition" template (see 12.2), otherwise (for example FileSize or Quantity) use PropertyDefinitionString type.
- The **Name** attribute is the text by which the property is known. The value of this attribute shall be specified. Use of "Description" template (see 4.6.7).
- The **ValueComponent** attribute is the text representing the value. Use of "Description" template (see 4.6.7).
- Other attributes than these are not covered by the Recommended Practices; their use is discouraged as it would depend on mutual agreements between data exchange partners.

**Preprocessor Recommendations:** None specified.

**Postprocessor Recommendations:** None specified.

**Related Entities:** There are no specific related entities.



## The Instance Model: STEP exchange file format (ISO10303 AP242 BO Model XML syntax)

```

...
<PartView uid="pvv--000000453">
  ...
  <PropertyValue uid="pv--000000455" xsi:type="n0:StringValue">
    <Definition>
      <PropertyDefinition uidRef="pd--000000320"/>
    </Definition>
    <Name>
      <CharacterString>provenance</CharacterString>
    </Name>
    <ValueComponent>
      <CharacterString>CAx-IF</CharacterString>
    </ValueComponent>
  </PropertyValue>
  ...
</PartView>

<PropertyDefinition uid="pd--000000320">
  <Id id="quality property"/>
  <PropertyType>
    <ClassString>PDM property</ClassString>
  </PropertyType>
</PropertyDefinition>

```

### 4.6.11 Template “DateTime”

The entity `DateTimeAssignment` permits the attachment of a `DateTimeString` to one or more objects.

The `Role` provides the meaning of the assignment.

The `AssignedDate` attribute provides date and time information.

## The Instance Model: AP242 BO Model XML entities and attributes

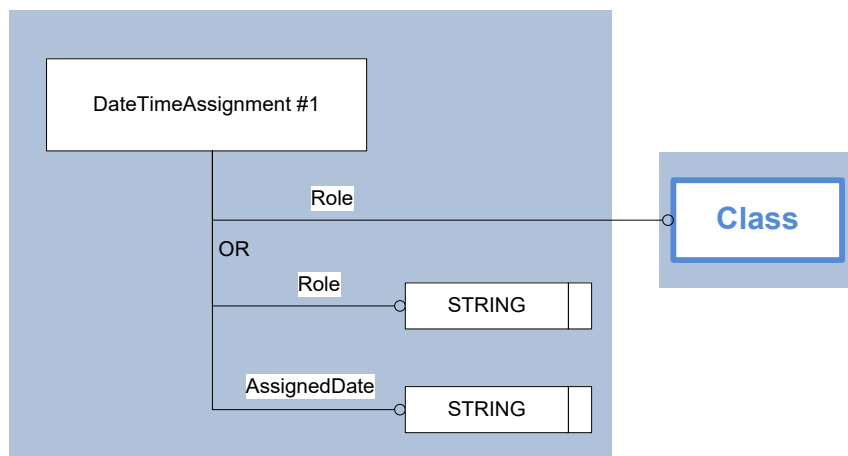


Figure 10: Template “DateTime”

ENTITY DateTimeAssignment	Attribute Type
AssignedDate	Xsd:dateTime
ClassifiedAs	OPTIONAL SET[1:?] of Classification
Description	OPTIONAL DescriptorSelect
Id	OPTIONAL IdentifierSelect
Role	ClassSelect
ActivityAssignment	OPTIONAL SET[1:?] of ActivityAssignment
ActivityMethodAssignment	OPTIONAL SET[1:?] of ActivityMethodAssignment
ApprovalAssignment	OPTIONAL SET[1:?] of ApprovalAssignment
AssignmentObjectRelationship	OPTIONAL SET[1:?] of AssignmentObjectRelationship
ConditionAssignment	OPTIONAL SET[1:?] of ConditionAssignment
DateAndPersonAssignment	OPTIONAL SET[1:?] of DateAndPersonAssignment
DateTimeAssignment	OPTIONAL SET[1:?] of DateTimeAssignment
DocumentAssignment	OPTIONAL SET[1:?] of DocumentAssignment
EffectivityAssignment	OPTIONAL SET[1:?] of EffectivityAssignment
EventAssignment	OPTIONAL SET[1:?] of EventAssignment
FrozenAssignment	OPTIONAL SET[1:?] of FrozenAssignment
ModelPropertyAssignment	OPTIONAL SET[1:?] of ModelPropertyAssignment
OrganizationOrPersonInOrganizationAssignment	OPTIONAL SET[1:?] of OrganizationOrPersonInOrganizationAssignment
PropertyDefinitionAssignment	OPTIONAL SET[1:?] of PropertyDefinitionAssignment
PropertyValueRelationship	OPTIONAL SET[1:?] of PropertyValueRelationship
TimeIntervalAssignment	OPTIONAL SET[1:?] of TimeIntervalAssignment

Table 12: "DateTime" Attributes

### Attribute recommendations

- The **Role** attribute is the text that defines the meaning of the association of the date and time to an object. Use ClassString if one of the values below is used, otherwise use "Class" template (see 4.6.4).
- The **AssignedDate** attribute is the text representing the date and time information. Use DateTimeString type.
- Other attributes than these are not covered by the Recommended Practices; their use is discouraged as it would depend on mutual agreements between data exchange partners.

**Preprocessor Recommendations:** The representation of DateTimeString shall respect ISO 8601. In the BO Model definition of DateTimeString type it is mandatory to represent the date, whereas the time is optional, but with the xsd:dateTime type both date and time are mandatory. It is recommended to set the time with the following default value: YYYY-MM-DDT00:00:00.

When applicable, the following values shall be used for the attribute Role:

Role	Explanation
'classification date'	the specified object is classified at the given date and time
'creation'	the referenced object was created at the given date and time
'installation'	the referenced object was mounted in a product at the given date and time
'lock'	the specified object is locked in the underlying legacy system since the given date and time
'production'	the referenced object was produced at the given date and time
'registration'	the referenced object was determined at the given date and time
'update'	the referenced object was altered at the given date and time

**Postprocessor Recommendations:** Postprocessors should interpret the value of the AssignedDate attribute according to ISO 8601

**Related Entities:** There are no specific related entities.

### The Instance Model: STEP exchange file format (ISO10303 AP242 BO Model XML syntax)

```
...
<DateTimeAssignment uid="dta--0000000017D374A0--id1">
  <AssignedDate>2014-10-16T09:08:07</AssignedDate>
  <Role>
    <ClassString>creation</ClassString>
  </Role>
</DateTimeAssignment>
...
```

#### 4.6.12 Template “Approval”

The entity ApprovalAssignment allows the attachment of an Approval to one or more objects.

The entity Approval represents a statement made by technical personnel or management personnel whether certain requirements are met.

The Description provides further information about the approval.

The Status attribute provides a user interpretable designation of the level of acceptance.

### The Instance Model: AP242 BO Model XML entities and attributes

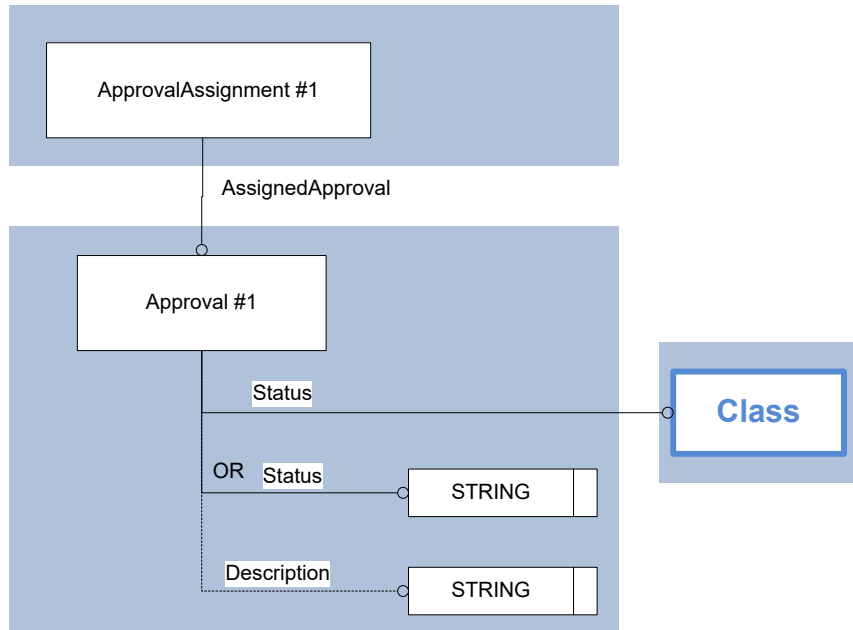


Figure 11: Template “Approval”

ENTITY ApprovalAssignment	Attribute Type
AssignedApproval	Approval
ClassifiedAs	OPTIONAL SET[1:?] of Classification
Description	OPTIONAL DescriptorSelect
Id	OPTIONAL IdentifierSelect
ActivityAssignment	OPTIONAL SET[1:?] of ActivityAssignment
ActivityMethodAssignment	OPTIONAL SET[1:?] of ActivityMethodAssignment
ApprovalAssignment	OPTIONAL SET[1:?] of ApprovalAssignment
AssignmentObjectRelationship	OPTIONAL SET[1:?] of AssignmentObjectRelationship
ConditionAssignment	OPTIONAL SET[1:?] of ConditionAssignment
DateAndPersonAssignment	OPTIONAL SET[1:?] of DateAndPersonAssignment
DateTimeAssignment	OPTIONAL SET[1:?] of DateTimeAssignment
DocumentAssignment	OPTIONAL SET[1:?] of DocumentAssignment
EffectivityAssignment	OPTIONAL SET[1:?] of EffectivityAssignment
EventAssignment	OPTIONAL SET[1:?] of EventAssignment
FrozenAssignment	OPTIONAL SET[1:?] of FrozenAssignment
ModelPropertyAssignment	OPTIONAL SET[1:?] of ModelPropertyAssignment
OrganizationOrPersonInOrganizationAssignment	OPTIONAL SET[1:?] of OrganizationOrPersonInOrganizationAssignment
PropertyDefinitionAssignment	OPTIONAL SET[1:?] of PropertyDefinitionAssignment
PropertyValueRelationship	OPTIONAL SET[1:?] of PropertyValueRelationship
TimeIntervalAssignment	OPTIONAL SET[1:?] of TimeIntervalAssignment

Table 13: “ApprovalAssignment” Attributes

**Attribute recommendations**

- The **AssignedApproval** attribute is the reference to the Approval entity.
- Other attributes than these are not covered by these Recommended Practices; their use is discouraged as it would depend on mutual agreements between data exchange partners.

**Preprocessor Recommendations:** None specified.

**Postprocessor Recommendations:** None specified.

**Related Entities:** There are no specific related entities.

ENTITY Approval	Attribute Type
ApprovalScope	OPTIONAL SET[1:?] of ApprovalScopeSelect
ApprovedBy	OPTIONAL SET[1:?] of ApprovingPersonOrganization
ClassifiedAs	OPTIONAL SET[1:?] of Classification
Description	OPTIONAL DescriptorSelect
Id	OPTIONAL IdentifierSelect
SameAs	OPTIONAL SET[1:?] of ProxySelect
Status	ClassSelect
ValidDate	Xsd:dateTime
ApprovalRelationship	OPTIONAL SET[1:?] of ApprovalRelationship
ConditionAssignment	OPTIONAL SET[1:?] of ConditionAssignment
DateAndPersonAssignment	OPTIONAL SET[1:?] of DateAndPersonAssignment
DateTimeAssignment	OPTIONAL SET[1:?] of DateTimeAssignment
DocumentAssignment	OPTIONAL SET[1:?] of DocumentAssignment
EventAssignment	OPTIONAL SET[1:?] of EventAssignment
InformationUsageRightAssignment	OPTIONAL SET[1:?] of InformationUsageRightAssignment
ModelPropertyAssignment	OPTIONAL SET[1:?] of ModelPropertyAssignment
OrganizationOrPersonInOrganizationAssignment	OPTIONAL SET[1:?] of OrganizationOrPersonInOrganizationAssignment
PropertyDefinitionAssignment	OPTIONAL SET[1:?] of PropertyDefinitionAssignment
PropertyValueRelationship	OPTIONAL SET[1:?] of PropertyValueRelationship
TimeIntervalAssignment	OPTIONAL SET[1:?] of TimeIntervalAssignment

Table 14: "Approval" Attributes

**Attribute recommendations**

- The **Status** attribute is the text representing a user interpretable designation of the level of acceptance. Use ClassString if one of the values below is used, otherwise use "Class" template (see 4.6.4).
- The **Description** attribute is the text by which the approval is described. The value of this attribute need not be specified. Use "Description" template (see 4.6.7).

- Other attributes than these are not covered by these Recommended Practices; their use is discouraged as it would depend on mutual agreements between data exchange partners.

**Preprocessor Recommendations:** When applicable, the following values shall be used for the attribute Status:

- 'in progress'
- 'approved'
- 'approved with comments'
- 'not approved'.

**Postprocessor Recommendations:** None specified.

**Related Entities:** There are no specific related entities.

## The Instance Model: STEP exchange file format (ISO10303 AP242 BO Model XML syntax)

```
...
  <ApprovalAssignment uid="appas--0000000017D374A0--id1">
    <AssignedApproval uidRef="app--inprogress"/>
  </ApprovalAssignment>
...
<Approval uid="app--inprogress">
  <Description>
    <CharacterString>disposition</CharacterString>
  </Description>
  <Status>
    <ClassString>in progress</ClassString>
  </Status>
</Approval>
```

### 4.6.13 Template “Person”

The entity `Person` represents an individual human being.

The `Id` attribute provides a unique identification of the person.

The `FirstName` attribute provides the first name of the person.

The `LastName` attribute provides the last name of the person.

## The Instance Model: AP242 BO Model XML entities and attributes

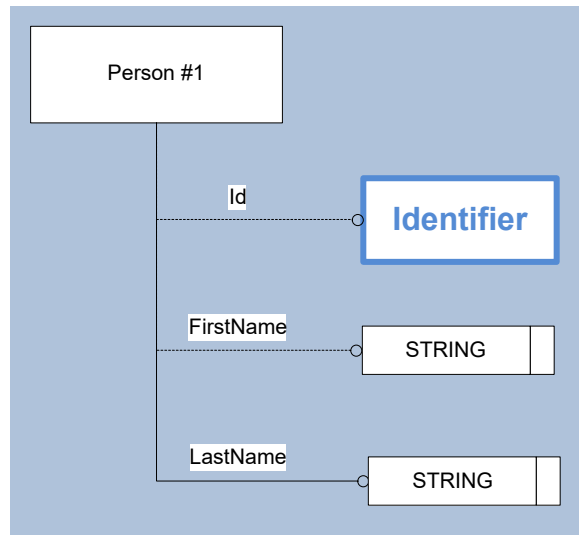


Figure 12: Template “Person”

ENTITY Person	Attribute Type
ClassifiedAs	OPTIONAL SET[1:?] of Classification
Description	OPTIONAL DescriptorSelect
FirstName	OPTIONAL String
Id	OPTIONAL IdentifierSelect
LastName	String
MiddleNames	OPTIONAL LIST[1:?] of String
PrefixTitles	OPTIONAL LIST[1:?] of String
SameAs	OPTIONAL SET[1:?] of ProxySelect
SuffixTitles	OPTIONAL LIST[1:?] of String
ActivityAssignment	OPTIONAL SET[1:?] of ActivityAssignment
ActivityMethodAssignment	OPTIONAL SET[1:?] of ActivityMethodAssignment
DateAndPersonAssignment	OPTIONAL SET[1:?] of DateAndPersonAssignment
DateTimeAssignment	OPTIONAL SET[1:?] of DateTimeAssignment
DocumentAssignment	OPTIONAL SET[1:?] of DocumentAssignment
EventAssignment	OPTIONAL SET[1:?] of EventAssignment
FrozenAssignment	OPTIONAL SET[1:?] of FrozenAssignment
InformationUsageRightAssignment	OPTIONAL SET[1:?] of InformationUsageRightAssignment
ModelPropertyAssignment	OPTIONAL SET[1:?] of ModelPropertyAssignment
OrganizationOrPersonInOrganizationAssignment	OPTIONAL SET[1:?] of OrganizationOrPersonInOrganizationAssignment
PropertyDefinitionAssignment	OPTIONAL SET[1:?] of PropertyDefinitionAssignment
PropertyValueRelationship	OPTIONAL SET[1:?] of PropertyValueRelationship
TimeIntervalAssignment	OPTIONAL SET[1:?] of TimeIntervalAssignment
WorkRequestAssignment	OPTIONAL SET[1:?] of WorkRequestAssignment

Table 15: “Person” Attributes



### **Attribute recommendations**

- The **FirstName** attribute is the text by which the human being is known. The value of this attribute need not be specified. Use String type.
- The **Id** attribute is the identifier that distinguishes the person. The value of this attribute need not be specified. Use “Identifier” template (see 4.6.6).
- The **LastName** attribute is the text by which the human being is known. Use String type.
- Other attributes than these are not covered by these Recommended Practices; their use is discouraged as it would depend on mutual agreements between data exchange partners.

**Preprocessor Recommendations:** None specified.

**Postprocessor Recommendations:** None specified.

**Related Entities:** There are no specific related entities.

### **The Instance Model: STEP exchange file format (ISO10303 AP242 BO Model XML syntax)**

```
<Person uid="pers--Mustermann">
  <FirstName>Max</FirstName>
  <Id>
    <Identifier uid="pers--Mustermann--1" id="4711" idRoleRef=„rl--ii" id-
ContextRef="o--000000178"/>
  </Id>
  <LastName>Mustermann</LastName>
</Person>
```

#### **4.6.14 Template “PersonInOrganization”**

The entity `OrganizationOrPersonInOrganizationAssignment` allows the attachment of a `PersonInOrganization` to one or more objects.

The `Role` attribute specifies the responsibility of the assigned person.

The entity `PersonInOrganization` represents the membership of a person in an organization with a specific role.

The `AssociatedPerson` is a reference to the person.

The `AssociatedOrganization` is a reference to the organization.

The `Id` provides a unique identification to the `PersonInOrganization`.

The `PersonRole` attribute specifies the role of the person inside the organization.

### **The Instance Model: AP242 BO Model XML entities and attributes**

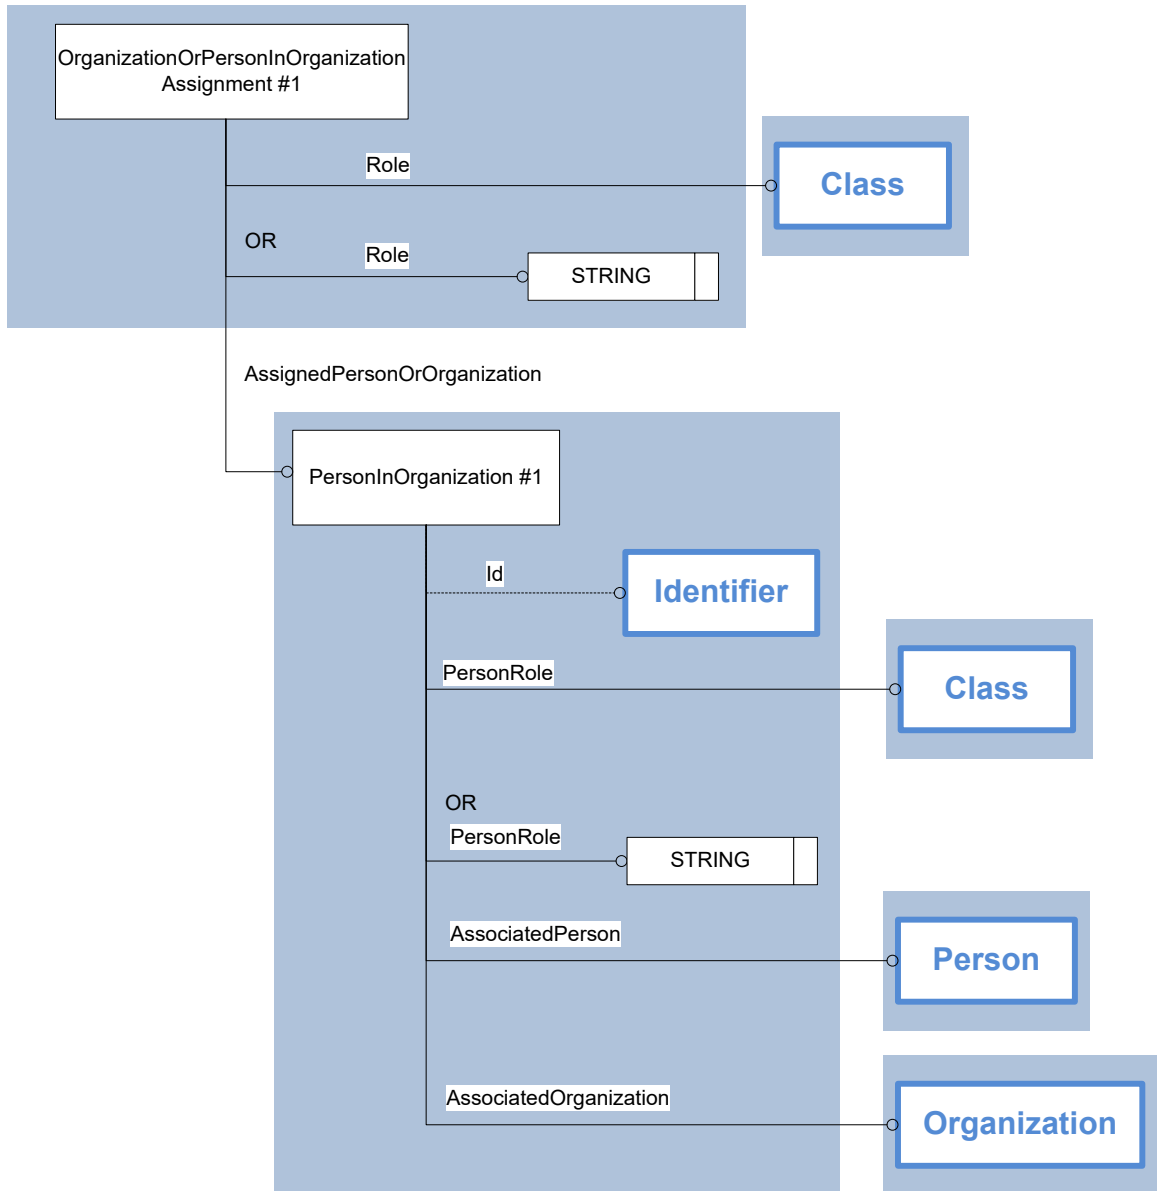


Figure 13: Template “PersonInOrganization”

ENTITY OrganizationOrPersonInOrganizationAssignment	Attribute Type
AssignedPersonOrOrganization	OrganizationOrPersonInOrganizationSelect
ClassifiedAs	OPTIONAL SET[1:?] of Classification
Description	OPTIONAL DescriptorSelect
Id	OPTIONAL IdentifierSelect
Role	ClassSelect
ActivityAssignment	OPTIONAL SET[1:?] of ActivityAssignment
ActivityMethodAssignment	OPTIONAL SET[1:?] of ActivityMethodAssignment
ApprovalAssignment	OPTIONAL SET[1:?] of ApprovalAssignment
AssignmentObjectRelationship	OPTIONAL SET[1:?] of AssignmentObjectRelationship

ENTITY OrganizationOrPersonInOrganizationAssignment	Attribute Type
ConditionAssignment	OPTIONAL SET[1:?] of ConditionAssignment
DateAndPersonAssignment	OPTIONAL SET[1:?] of DateAndPersonAssignment
DateTimeAssignment	OPTIONAL SET[1:?] of DateTimeAssignment
DocumentAssignment	OPTIONAL SET[1:?] of DocumentAssignment
EffectivityAssignment	OPTIONAL SET[1:?] of EffectivityAssignment
EventAssignment	OPTIONAL SET[1:?] of EventAssignment
FrozenAssignment	OPTIONAL SET[1:?] of FrozenAssignment
ModelPropertyAssignment	OPTIONAL SET[1:?] of ModelPropertyAssignment
OrganizationOrPersonInOrganizationAssignment	OPTIONAL SET[1:?] of OrganizationOrPersonInOrganizationAssignment
PropertyDefinitionAssignment	OPTIONAL SET[1:?] of PropertyDefinitionAssignment
PropertyValueRelationship	OPTIONAL SET[1:?] of PropertyValueRelationship
TimeIntervalAssignment	OPTIONAL SET[1:?] of TimeIntervalAssignment

Table 16: "OrganizationOrPersonInOrganizationAssignment" Attributes

#### Attribute recommendations

- The **AssignedPersonOrOrganization** attribute defines the person inside an organization with a reference to the PersonInOrganization entity or an organization with a reference to the Organization entity.
- The **Role** attribute is the text describing the responsibility of the person. Use ClassString if one of the values below is used, otherwise use "Class" template (see 4.6.4).
- Other attributes than these are not covered by these Recommended Practices; their use is discouraged as it would depend on mutual agreements between data exchange partners.

**Preprocessor Recommendations:** When applicable, the following values shall be used for the attribute Role:

Role	Explanation
'assignee'	The assigned person or organization to complete, review, comment or update the referenced object
'author'	The author holds the copyright
'classification officer'	The assigned person or organization is formally responsible for the classification of the referenced object
'creator'	The referenced object has been created by the assigned person or organization
'custodian'	The assigned person or organization is responsible for the existence and integrity of the referenced object
'customer'	The assigned person or organization acts as a purchaser or consumer of the referenced object
'design supplier'	The assigned person or organization is the one who delivers the data describing the referenced object

Role	Explanation
'editor'	One or more attributes have been modified by the assigned person or organization
'id owner'	The assigned person or organization is the one responsible for the designation of an identifier
'location'	The assigned organization is the place where the referenced object can be found or where it takes place
'locked by'	The assigned person that currently locks the associated object in the underlying legacy system
'manufacturer'	The assigned person or organization is the one who produces the actual (physical) object
'owner'	The assigned person or organization owns the referenced object, and has final say over its disposition and any changes to it
'read access'	The assigned person or organization neither has the right to modify any attributes of the referenced object, nor to modify, create or delete objects that are attached directly or indirectly to the referenced object
'supplier'	The assigned person or organization is the one who delivers the actual (physical) object (e.g., a dealer)
'wholesaler'	The assigned person or organization the one who is in the sales chain between the manufacturer and the supplier
'write access'	The assigned person or organization has the right to modify the attributes of the referenced object, as well as to modify, create, or delete objects that are attached directly or indirectly to the referenced object

Table 17: Recommended Values of "OrganizationOrPersonInOrganizationAssignment.role"

**Postprocessor Recommendations:** None specified.

**Related Entities:** There are no specific related entities.

ENTITY PersonInOrganization	Attribute Type
AssociatedOrganization	Organization
AssociatedPerson	Person
ClassifiedAs	OPTIONAL SET[1:?] of Classification
Description	OPTIONAL DescriptorSelect
Id	OPTIONAL IdentifierSelect
PersonRole	ClassSelect
SameAs	OPTIONAL SET[1:?] of ProxySelect
ActivityAssignment	OPTIONAL SET[1:?] of ActivityAssignment
ActivityMethodAssignment	OPTIONAL SET[1:?] of ActivityMethodAssignment
AddressAssignment	OPTIONAL SET[1:?] of AddressAssignment
ApprovalAssignment	OPTIONAL SET[1:?] of ApprovalAssignment

ENTITY PersonInOrganization	Attribute Type
ContractAssignment	OPTIONAL SET[1:?] of ContractAssignment
DateAndPersonAssignment	OPTIONAL SET[1:?] of DateAndPersonAssignment
DateTimeAssignment	OPTIONAL SET[1:?] of DateTimeAssignment
DocumentAssignment	OPTIONAL SET[1:?] of DocumentAssignment
EffectivityAssignment	OPTIONAL SET[1:?] of EffectivityAssignment
EventAssignment	OPTIONAL SET[1:?] of EventAssignment
FrozenAssignment	OPTIONAL SET[1:?] of FrozenAssignment
InformationUsageRightAssignment	OPTIONAL SET[1:?] of InformationUsageRightAssignment
ModelPropertyAssignment	OPTIONAL SET[1:?] of ModelPropertyAssignment
OrganizationOrPersonInOrganizationAssignment	OPTIONAL SET[1:?] of OrganizationOrPersonInOrganizationAssignment
PersonInOrganizationRelationship	OPTIONAL SET[1:?] of PersonInOrganizationRelationship
PropertyDefinitionAssignment	OPTIONAL SET[1:?] of PropertyDefinitionAssignment
PropertyValueRelationship	OPTIONAL SET[1:?] of PropertyValueRelationship
SuppliedObjectRelationship	OPTIONAL SET[1:?] of SuppliedObjectRelationship
TimeIntervalAssignment	OPTIONAL SET[1:?] of TimeIntervalAssignment
WorkRequestAssignment	OPTIONAL SET[1:?] of WorkRequestAssignment

Table 18: "PersonInOrganization" Attributes

### Attribute recommendations

- The **AssociatedPerson** attribute defines the person. Use "Person" template (see 4.6.13).
- The **AssociatedOrganization** attribute defines the organization. Use "Organization" template (see 4.6.2).
- The **Id** attribute is the identification of the entity. The value of this attribute need not be specified. Use "Identifier" template (see 4.6.6).
- The **PersonRole** attribute is the text describing the role. Use ClassString.
- Other attributes than these are not covered by these Recommended Practices; their use is discouraged as it would depend on mutual agreements between data exchange partners.

**Preprocessor Recommendation:** At least one of Person.Id or PersonInOrganization.Id shall be set.

### Postprocessor Recommendations:

When applicable, the following values shall be used for the attribute Role:

- 'employee': The associated person is a member of kind 'employee' of the associated organization.

**Related Entities:** There are no specific related entities.

## The Instance Model: STEP exchange file format (ISO10303 AP242 BO Model XML syntax)

```
...
  <OrganizationOrPersonInOrganizationAssignment uid="poa--0000000017D374A0-
-id1">
    <AssignedPersonOrOrganization uidRef="pio--005-TPEVD-Mustermann"/>
    <Role>
      <ClassString>creator</ClassString>
    </Role>
  </OrganizationOrPersonInOrganizationAssignment>
...
<PersonInOrganization uid="pio--005-TPEVD-Mustermann">
  <AssociatedOrganization uidRef="org--005-TPEVD"/>
  <AssociatedPerson uidRef="pers--Mustermann"/>
  <Id>
    <Identifier uid="pio--005-TPEVD-Mustermann--1" id="005-TP/EVD-Muster-
mann" idRoleRef="„rl--ii" idContextRef="o--000000178"/>
  </Id>
  <PersonRole>
    <ClassString>employee</ClassString>
  </PersonRole>
</PersonInOrganization>
```

## 5 Part Identification and Classification

The scope of this section corresponds to sections 1 and 2 of the PDM Schema Usage Guide V4.3.

The AP242 BO Model manages industrial products as Parts. An AP242 BO Model conformant data exchange shall include at least one element of type Part.

Identification of Parts in the AP242 BO Model uses three concepts:

- Part Master Identification,
- Context Information, and
- Type Classification.

Part master identification consists of the base part number, a unique part version identification, and – optionally – the identification of a view definition that describes application domain, lifecycle stage and property values. Details are specified in 5.1.

Context information provides scope and environment of interpretation of product identification information. Context information may be given locally, that is, for a single XML element, such as, for Parts using ViewContext (see PartView in 5.1.3 and the “ViewContext” template in 4.6.8), or globally for the entire physical file using the element ExchangeContext for stating the organization that owns all identifiers in the data set (see template in 4.6.1).

For Part classification the AP242 BO Model distinguishes the following two approaches:

- Type classification
  - An identified Part may be placed into one or several of the following categories: 'piece part', 'product', 'software', 'assembly', 'tool', or 'raw material'. These values are set in the attribute Part.PartTypes; see section 5.1.1.
- General classification
  - Parts may need to be classified according to a classification system with explicit reference to classification criteria and related properties. For example, pumps may be classified according to their principle of working and their capacity. Such classification is enabled by the attribute Part.ClassifiedAs; see section 5.1.1. Thus, a Part may be linked to an extensive and already existing classification system.

These three concepts are represented in a data exchange by attributes of the three main information elements in each of the two templates “Part” and “Assembly”.

### 5.1 Templates “Part” and “Assembly”

To enable independent use of Parts and Assemblies both a “Part” template and an “Assembly” template are specified here. They support the ability to uniquely identify Parts and Assemblies including their metadata and properties. This backbone of the AP242 information model consists in the AP242 BO Model of the following structurally distinct data types as also shown in Figure 14 and Figure 15:

- Part,
- PartVersion and,
- PartView respectively AssemblyDefinition.

The representations of the Part and PartVersion concepts are identical for both the “Part” and the “Assembly” templates; only on the third level of detail they differ, that is, below PartVersion, as shown in Figure 14 and Figure 15 below.



The Part maintains information common to all Part versions and disciplines and/or life-cycle views. It contains the base Part number and name. The base number should not be subject to any encoding of information into a single complex parseable string.

The version information may represent a design revision or iteration in a design cycle of a part. The Part version collects and, thus, relates all information among all associated disciplines and life-cycle view definitions.

Part, PartVersion and PartView, respectively AssemblyDefinition, shall be written to the XML-file using containment. The information elements in the white area on the left side of Figure 14 and Figure 15 are root elements and are, thus, outside of the containment blocks.

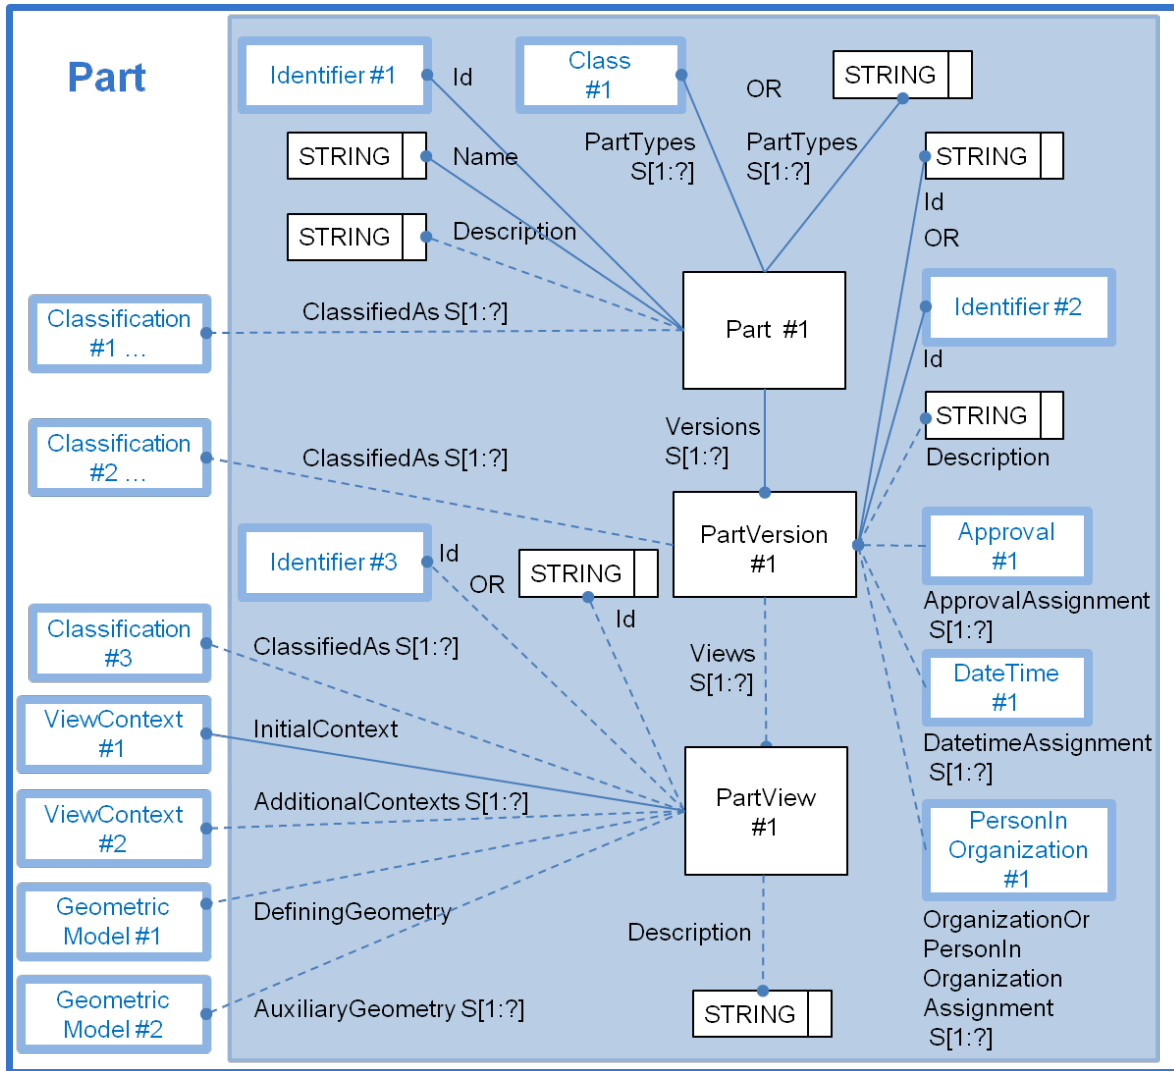


Figure 14: Template "Part"

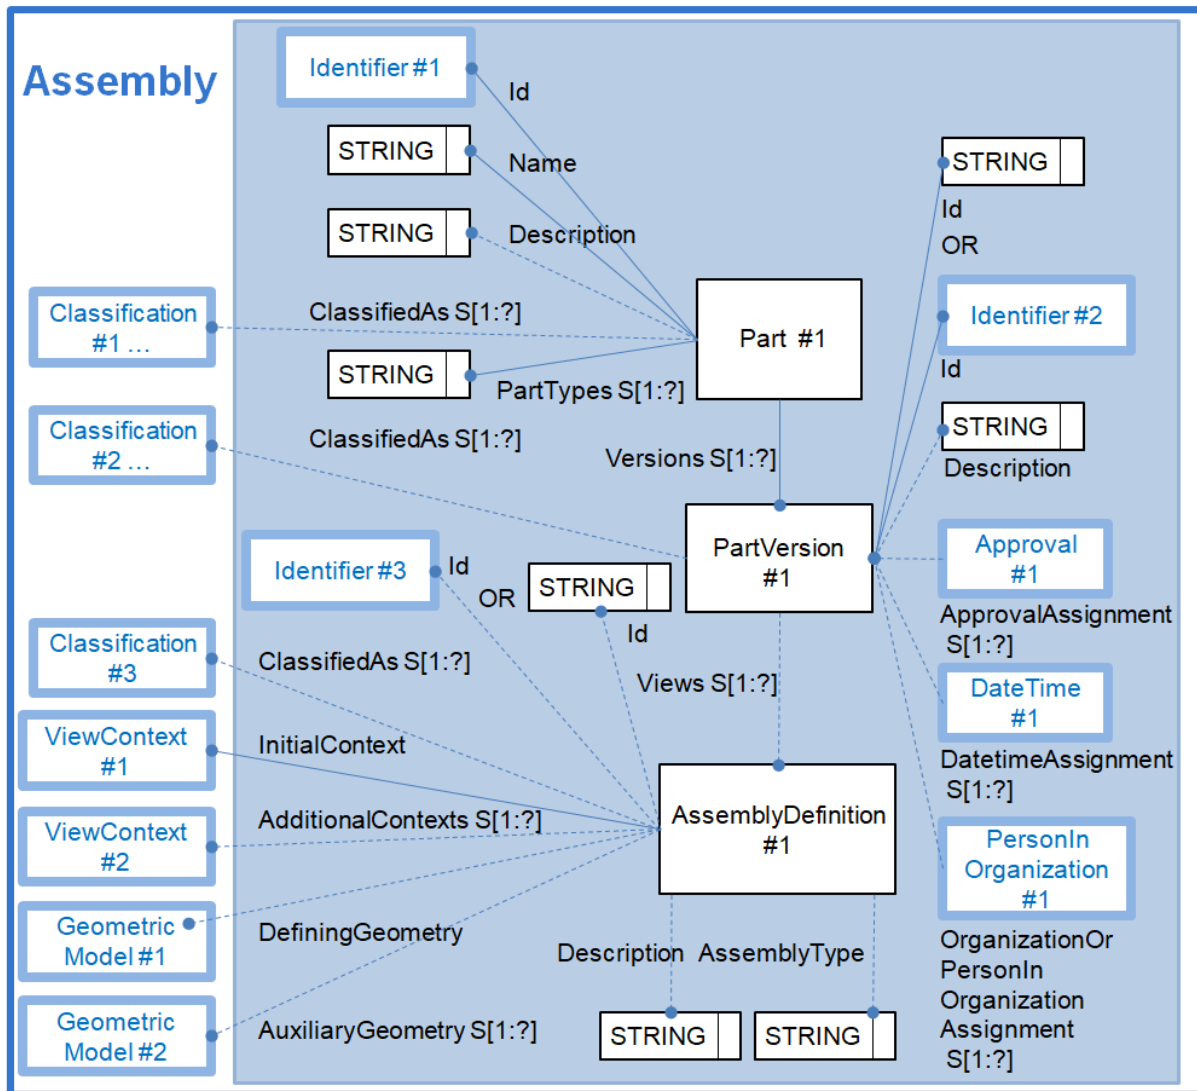


Figure 15: Template "Assembly"

### 5.1.1 Part

The Part entity represents the part master base information. This entity collects all information that is common among the different versions and views of the part. The part number is strictly an identifier. It should not be used as a 'smart string' with some parseable internal coding scheme, e.g., to identify version or classification information.

The Part number identifier shall be unique within the scope of the business process of the information exchange. This is typically not a problem when the product data is only used within a single company. If the data is being assembled for external use, the identification must be interpreted as unique within that broader domain. Processors may need to evaluate more than one string (i.e., more than only Part.id) to establish unique identification of the Part. The "Identifier" template provides a combination of parameters including Identifier.idRoleRef and Identifier.idContextRef that make Part identification unique.

The following XML-snippet is an example from a physical file that is in accordance to Figure 14.

## The Instance Model: STEP exchange file format (ISO10303 AP242 BO Model XML syntax)

```
<Part uid="p--0000000017086CB0">
  <Id>
    <Identifier uid="pid--0000000017086CB0--id1" id="as1" idRoleRef=",,rl--
ii" idContextRef="o--000000178"/>
  </Id>
  ...
  <Versions>
    <PartVersion uid="pv--0000000017086CB0--id1">
    ...
      <Views>
        <PartView xsi:type="n0:AssemblyDefinition" uid="pvv--
0000000017086CB0--id1">
        ...
          </PartView>
        </Views>
      </PartVersion>
    </Versions>
  </Part>
  <Part uid="p--000000001E5A89F0">
    <Id>
      <Identifier uid="pid--000000001E5A89F0--id2" id="plate" idRoleRef=",,rl--
ii" idContextRef="o--000000178"/>
    </Id>
    ...
    <Versions>
      <PartVersion uid="pv--000000001E5A89F0--id2">
      ...
        <Views>
          <PartView uid="pvv--000000001E5A89F0--id2">
          ...
            </PartView>
          </Views>
        </PartVersion>
      </Versions>
    </Part>
```

Entity Part attributes	Attribute type
ClassifiedAs	OPTIONAL SET[1:?] of Classification
Description	OPTIONAL DescriptorSelect
Id	IdentifierSelect
Name	DescriptorSelect
PartTypes	SET[1:?] of ClassSelect
SameAs	OPTIONAL SET[1:?] of ProxySelect
Versions	SET[1:?] of PartVersion
ActivityAssignment	OPTIONAL SET[1:?] of ActivityAssignment
ActivityMethodAssignment	OPTIONAL SET[1:?] of ActivityMethodAssignment
ApprovalAssignment	OPTIONAL SET[1:?] of ApprovalAssignment
CertificationAssignment	OPTIONAL SET[1:?] of CertificationAssignment
ContractAssignment	OPTIONAL SET[1:?] of ContractAssignment
DateAndPersonAssignment	OPTIONAL SET[1:?] of DateAndPersonAssignment
DatetimeAssignment	OPTIONAL SET[1:?] of DateTimeAssignment
DocumentAssignment	OPTIONAL SET[1:?] of DocumentAssignment
EffectivityAssignment	OPTIONAL SET[1:?] of EffectivityAssignment
EventAssignment	OPTIONAL SET[1:?] of EventAssignment
FrozenAssignment	OPTIONAL SET[1:?] of FrozenAssignment
InformationUsageRightAssignment	OPTIONAL SET[1:?] of InformationUsageRightAssignment
ModelPropertyAssignment	OPTIONAL SET[1:?] of ModelPropertyAssignment
OrganizationOrPersonInOrganizationAssignment	OPTIONAL SET[1:?] of OrganizationOrPersonInOrganizationAssignment
PartRelationship	OPTIONAL SET[1:?] of PartRelationship
ProjectAssignment	OPTIONAL SET[1:?] of ProjectAssignment
PropertyDefinitionAssignment	OPTIONAL SET[1:?] of PropertyDefinitionAssignment
PropertyValueAssignment	OPTIONAL SET[1:?] of PropertyValueAssignment
RequirementAssignment	OPTIONAL SET[1:?] of RequirementAssignment
SecurityClassificationAssignment	OPTIONAL SET[1:?] of SecurityClassificationAssignment
SuppliedObjectRelationship	OPTIONAL SET[1:?] of SuppliedObjectRelationship
TimeIntervalAssignment	OPTIONAL SET[1:?] of TimeIntervalAssignment
WorkRequestAssignment	OPTIONAL SET[1:?] of WorkRequestAssignment

Table 19: "Part" Attributes

### Attribute recommendations

- **ClassifiedAs:** the classifications of the Part. The value of this attribute need not be specified. Use "Classification" template (see 4.6.5).
- **Description:** an expanded name or text that provides further information about the Part. The value of this attribute need not be specified. Use "Description" template (see 4.6.7).
- **Id:** the identifier or set of identifiers for the Part, the part number. Use "Identifier" template (see 4.6.6).
- **Name:** the nomenclature or common name of the Part. Use "Description" template (see 4.6.7).
- **PartTypes:** the category of a Part. Use ClassString type, that is, PartTypes is a set of one or many strings. The value of this element shall be one or several of the following:

PartTypes	Explanation
'piece part'	a product that is not subject to decomposition from the perspective of a specific application; is also called component
'product'	a thing or substance produced by a natural or artificial process; may be a piece part, an assembly of piece parts, a tool, an assembly of tools, and raw material
'software'	a non-tangible product that is an organized collection of computer data and instructions for use by a computer
'tool'	a product used to manufacture products by applying various manufacturing technologies
'assembly'	a product that is decomposable into a set of piece parts or other assemblies from the perspective of a specific application
'raw material'	basic substance in its natural, modified, or semi-processed state, used as an input to a production process that shall result in piece parts and tools

- **Versions:** the related variants of the Part; a Part shall have at least one PartVersion.
- **AlternatePartRelationship:** to assign (optionally) an alternate part to this part. For more details, refer to 0.
- **PropertyValueAssignment:** to assign a PropertyValue to the Part. Use the "PropertyValueAssignment" template; see 6.2 for details.

#### Preprocessor Recommendation:

- Properties shall only be associated to the Part if they apply in the source PDM system to ALL PartVersions (i.e. if the source PDM system has two objects: a part master object and a part version object).

#### Postprocessor Recommendation:

- If the target PDM system also has a part master object, these properties shall be mapped to it and apply to all part versions. If not, they shall be mapped only to those part versions that are mentioned for this part in the XML file.
- Other attributes than these are not covered by these Recommended Practices; their use is discouraged as it would depend on mutual agreements between data exchange partners.

## 5.1.2 PartVersion

The PartVersion element represents the identification of a specific version of the base Part identification. A particular PartVersion is always related to exactly one Part. This is why, in XML it is embedded within a Part element.

In order to represent the make or buy information as in STEP AP214 AIM, the usage of ClassifiedAs attribute is recommended (see bugzilla 8219).

### Preprocessor Recommendations:

- For the purpose of the typical CAx data exchange use case of these recommended practices, only one view definition (PartView) shall be assigned to each PartVersion and only one version for each part.
- For the purpose of the typical PDM data exchange use case of these recommended practices, multiple versions of each part and multiple views of each version may be exchanged.

Examples of PartVersion instantiations are in the XML-snippet in section 4.1.2.

Entity PartVersion attributes	Attribute type
ClassifiedAs	OPTIONAL SET[1:?] of Classification
Description	OPTIONAL DescriptorSelect
Id	IdentifierSelect
SameAs	OPTIONAL SET[1:?] of ProxySelect
Views	OPTIONAL SET[1:?] of PartView
ActivityAssignment	OPTIONAL SET[1:?] of ActivityAssignment
ActivityMethodAssignment	OPTIONAL SET[1:?] of ActivityMethodAssignment
ApprovalAssignment	OPTIONAL SET[1:?] of ApprovalAssignment
CertificationAssignment	OPTIONAL SET[1:?] of CertificationAssignment
ContractAssignment	OPTIONAL SET[1:?] of ContractAssignment
DateAndPersonAssignment	OPTIONAL SET[1:?] of DateAndPersonAssignment
DatetimeAssignment	OPTIONAL SET[1:?] of DateTimeAssignment
DocumentAssignment	OPTIONAL SET[1:?] of DocumentAssignment
EffectivityAssignment	OPTIONAL SET[1:?] of EffectivityAssignment
EventAssignment	OPTIONAL SET[1:?] of EventAssignment
FrozenAssignment	OPTIONAL SET[1:?] of FrozenAssignment
InformationUsageRightAssignment	OPTIONAL SET[1:?] of InformationUsageRightAssignment
ModelPropertyAssignment	OPTIONAL SET[1:?] of ModelPropertyAssignment
OrganizationOrPersonInOrganizationAssignment	OPTIONAL SET[1:?] of OrganizationOrPersonInOrganizationAssignment
PartVersionRelationship	OPTIONAL SET[1:?] of PartVersionRelationship
ProjectAssignment	OPTIONAL SET[1:?] of ProjectAssignment
PropertyDefinitionAssignment	OPTIONAL SET[1:?] of PropertyDefinitionAssignment
PropertyValueAssignment	OPTIONAL SET[1:?] of PropertyValueAssignment

Entity PartVersion attributes	Attribute type
RequirementAssignment	OPTIONAL SET[1:?] of RequirementAssignment
SecurityClassificationAssignment	OPTIONAL SET[1:?] of SecurityClassificationAssignment
SuppliedObjectRelationship	OPTIONAL SET[1:?] of SuppliedObjectRelationship
TimeIntervalAssignment	OPTIONAL SET[1:?] of TimeIntervalAssignment
WorkRequestAssignment	OPTIONAL SET[1:?] of WorkRequestAssignment

Table 20: "PartVersion" Attributes

### Attribute recommendations

- **ActivityAssignment:** the Activities associated to the PartVersion. The value of this attribute need not be specified. Use "Activity" template (see Recommended Practices for AP242 XML Change Management).
- **ApprovalAssignment:** the level of acceptance of the PartVersion. The value of this attribute need not be specified. Use "Approval" template (see 4.6.12).
- **ClassifiedAs:** the classifications of the PartVersion. The value of this attribute need not be specified except for the the make or buy information. Use "Classification" template (see 4.6.5).
- **DatetimeAssignment:** the date and time of the creation or update of the PartVersion. The value of this attribute need not be specified. Use "DateTime" template (see 4.6.11).
- **Description:** the reason for the creation of the version. The value of this attribute need not be specified. Use "Description" template (see 4.6.7).
- **EffectivityAssignment:** to assign (optionally) one or multiple Effectivities to the usage of the PartVersion. Use the "EffectivityAssignment" template (see Recommended Practices for AP242 BO Model Configuration Management for details).
- **Id:** the identifier or set of identifiers for the PartVersion, the part version number. Use IdentifierString type or "Identifier" template (see 4.6.6).
  - **Preprocessor Recommendations:** If an organization does not version parts, it is recommended that the id attribute contains the string '/NULL' to indicate that no version information is relevant or intended. In this case only a single PartVersion shall be assigned to the Part. The id attribute shall be given the value /ANY if the assembly structure of the source system stores only the Part number and computes the identifier of the PartVersion at runtime based on parameters, such as, latest version and version valid at a given time.
    - Note: This technique may reduce the amount of data sent in change packages, but it also reduces the ability to track the actual contents of parts lists at a particular change level.
  - For the purpose of the typical CAX data exchange use case of these recommended practices, the use of '/ANY' is not recommended.
  - **Postprocessor Recommendations:** If the value of the id attribute for a PartVersion is the string '/NULL', postprocessors should use this as an indication that the sending system or business process does not support versioning of Parts. Postprocessors need to recognize an id value of '/ANY' as a generic revision of a Part that is involved as a component in an assembly. This is used to indicate that any existing revision of the component is valid for use in the



parent assembly and that the right PartVersion identifier must be computed at runtime.

- **Views:** the set of PartView objects that are defined for the PartVersion.
  - Each PartVersion shall have at least one associated PartView. This PartView shall represent the mechanical view definition of the part. For this mandatory PartView, the SET-type attribute PartView.initialContext.applicationDomain.sameAs shall contain the ProxyString type value 'mechanical design'. No other instances of PartView of the same PartVersion shall contain this string.
  - Other instances of PartView may be associated to the same PartVersion, for example, a PartView of the composites representation of the part. A meaningful value of PartView.initialContext.applicationDomain.sameAs should be agreed between data exchange partners; the list of pre-defined values in 4.6.8 may be extended by user-defined values.
- **OrganizationOrPersonInOrganizationAssignment:** an organization or person in organization with a specific relation to the PartVersion according to the OrganizationOrPersonInOrganizationAssignment.role attribute. The value of this attribute need not be specified. Use "PersonInOrganization" template (see 4.6.14).
- **PartVersionRelationship:** a PartVersion of the same Part or of a different Part with a specific relation to the PartVersion according to the PartVersionRelationship.RelationType attribute. The value of this attribute need not be specified. Use "PartVersionRelationship" template (see □).
- Other attributes than these are not covered by these Recommended Practices; their use is discouraged as it would depend on mutual agreements between data exchange partners.

### 5.1.3 PartView

The PartView entity represents the identification of a particular view on a version of the part base identification relevant for the requirements of particular life-cycle stages, application domains and user-defined properties. A PartView may be based on an application domain and/or a life-cycle stage (e.g., design, manufacturing). A PartView collects product data for a specific discipline and life-cycle. More than one PartView may be associated with a particular PartVersion, each representing a different view of the Part.

AssemblyDefinition is a subtype of PartView. It is used to associate subordinate components of the Part.

The PartView entity enables the establishment of many relationships between Parts and other product data concepts, such as, assembly structures, properties (including shape), and external descriptions of the product via documents (see chapter 7.4). **Preprocessor Recommendations:**

- The use of PartView entities is not strictly required by rules in the AP242 BO Model, but it is strongly recommended. All PartVersion entities shall have at least one associated PartView.
- If a PDM system does not distinguish between PartVersion and PartView, only one PartView shall be mapped (having id as unset).

An example of a PartView instantiation is in the XML-snippet in section 4.1.2

Entity PartView attributes	Attribute type
AdditionalContexts	OPTIONAL SET[1:?] of ViewContext
ClassifiedAs	OPTIONAL SET[1:?] of Classification
DefiningGeometry	OPTIONAL GeometricModel
AuxiliaryGeometry	OPTIONAL SET[1:?] of GeometricModel
Description	OPTIONAL DescriptorSelect
Id	OPTIONAL IdentifierSelect
InitialContext	ViewContext
InZone	OPTIONAL SET[1:?] of InZone
MaterialIdentification	OPTIONAL SET[1:?] of MaterialIdentification
Occurrence	OPTIONAL SET[1:?] of DefinitionBasedOccurrence
SameAs	OPTIONAL SET[1:?] of ProxySelect
ShapeDependentProperty	OPTIONAL SET[1:?] of ShapeDependentProperty
ShapeElement	OPTIONAL SET[1:?] of ShapeElement
SurfaceCondition	OPTIONAL SET[1:?] of SurfaceCondition
ActivityAssignment	OPTIONAL SET[1:?] of ActivityAssignment
ActivityMethodAssignment	OPTIONAL SET[1:?] of ActivityMethodAssignment
ApprovalAssignment	OPTIONAL SET[1:?] of ApprovalAssignment
BreakdownVersionAssignment	OPTIONAL SET[1:?] of BreakdownVersionAssignment
DateAndPersonAssignment	OPTIONAL SET[1:?] of DateAndPersonAssignment
DatetimeAssignment	OPTIONAL SET[1:?] of DateTimeAssignment
DocumentAssignment	OPTIONAL SET[1:?] of DocumentAssignment
EffectivityAssignment	OPTIONAL SET[1:?] of EffectivityAssignment
EventAssignment	OPTIONAL SET[1:?] of EventAssignment
FrozenAssignment	OPTIONAL SET[1:?] of FrozenAssignment
InformationUsageRightAssignment	OPTIONAL SET[1:?] of InformationUsageRightAssignment
ModelPropertyAssignment	OPTIONAL SET[1:?] of ModelPropertyAssignment
OrganizationOrPersonInOrganizationAssignment	OPTIONAL SET[1:?] of OrganizationOrPersonInOrganizationAssignment
PartViewRelationship	OPTIONAL SET[1:?] of PartViewRelationship
PropertyDefinitionAssignment	OPTIONAL SET[1:?] of PropertyDefinitionAssignment
PropertyValueAssignment	OPTIONAL SET[1:?] of PropertyValueAssignment
RequirementAssignment	OPTIONAL SET[1:?] of RequirementAssignment
SecurityClassificationAssignment	OPTIONAL SET[1:?] of SecurityClassificationAssignment
SuppliedObjectRelationship	OPTIONAL SET[1:?] of SuppliedObjectRelationship

Entity PartView attributes	Attribute type
TimeIntervalAssignment	OPTIONAL SET[1:?] of TimeIntervalAssignment
ViewOccurrenceRelationship	OPTIONAL SET[1:?] of ViewOccurrenceRelationship
WorkRequestAssignment	OPTIONAL SET[1:?] of WorkRequestAssignment

Table 21: "PartView" Attributes

### Attribute recommendations

- **AdditionalContexts:** the set of ViewContext objects that are relevant context descriptions for this PartView in addition to the InitialContext. The AdditionalContexts shall not contain the ViewContext that is referenced as the InitialContext. The value of this attribute need not be specified. Use "ViewContext" template (see 4.6.8).
- **ClassifiedAs:** the classifications of the PartView. The value of this attribute need not be specified. Use "Classification" template (see 4.6.5).
- **DefiningGeometry:** the GeometricModel that provides the shape for the PartView. See 6.1 for details of instantiating a GeometricModel and linking it to a PartView. The value of this attribute need not be specified.
- **AuxiliaryGeometry:** the set of GeometricModels that provide additional shapes for the PartView. These additional shapes do not define the primary geometry of a PartView. The value of this attribute need not be specified.
- **Description:** text or the set of texts that provide further information about the PartView. The value of this attribute need not be specified. Use "Description" template (see 4.6.7).
- **Id:** the identifier or set of identifiers for the PartView. The value of this attribute need not be specified. Use IdentifierString type or "Identifier" template (see 4.6.6).
  - **Preprocessor Recommendations:** There is no standard mapping for the id attribute of PartView; however, the value should be unique relative to other PartViews related to the same PartVersion. The id attribute shall not be 'overloaded' to include, for example, life-cycle or organizational information; this is generally not recommended for the AP242 BO Model. This attribute should contain a unique identifier for the PartView - no additional semantics are associated with this attribute.
  - **Postprocessor Recommendations:** Postprocessors do not need to expect any semantics from the id attribute; it is a pure identifying string. The id value – possibly composed of several values according to the "Identifier" template - should be unique relative to other the identifiers of other PartViews related to the same PartVersion.
- **InitialContext:** the ViewContext in which this view of the PartVersion has been designed primarily. Use "ViewContext" template (see 4.6.8).
- **Occurrence:** the instantiations of the PartView in a product structure. The element Occurrence itself cannot be instantiated. For the purpose of these recommended practices only the subtype "SingleOccurrence" (see template in 7.1) shall be used.
- **ShapeDependentProperty:** a characteristic of the shape, or of a portion of the shape of a PartView. The element ShapeDependentProperty itself cannot be instantiated. All three subtypes may be used, but these recommended practices provide guidance only for GeneralShapeDependentProperty (see template in 6.3).
- **ShapeElement:** to assign a ShapeElement to the PartView. See 6.3.1 for details.

- **DocumentAssignment:** to assign a DocumentVersion to the PartView. See 11.2 for details.
- **PartViewRelationship:** to assign an assembly link to the PartView. See the restrictions to the use of this construct in the section 7.4.
- **PropertyValueAssignment:** to assign a PropertyValue to the PartView. Use the “PropertyAssignment” template; see 6.2 for details.
- Other attributes than these are not covered by these Recommended Practices; their use is discouraged as it would depend on mutual agreements between data exchange partners.

#### 5.1.4 AssemblyDefinition

The AssemblyDefinition is a definition of a PartVersion that associates subordinate components to this PartVersion. It is a subtype of PartView and inherits, thus, all its attributes. As for PartViews, occurrences can be derived from AssemblyDefinition, properties, such as, shape, can be assigned to it and documents may be associated with it.

Components are added to an AssemblyDefinition by NextAssemblyOccurrenceUsage; see 7.1 and 7.2.

An example of an AssemblyDefinition instantiation is in the XML-snippet in section 7.1.

**Preprocessor Recommendations:** single parts (having no component parts beyond them), shall not be mapped as AssemblyDefinition, but rather as PartView.

Entity AssemblyDefinition attributes	Attribute type
AdditionalContexts	OPTIONAL SET[1:?] of ViewContext
ClassifiedAs	OPTIONAL SET[1:?] of Classification
DefiningGeometry	OPTIONAL GeometricModel
AuxiliaryGeometry	OPTIONAL SET[1:?] of GeometricModel
Description	OPTIONAL DescriptorSelect
Id	OPTIONAL IdentifierSelect
InitialContext	ViewContext
InZone	OPTIONAL SET[1:?] of InZone
MaterialIdentification	OPTIONAL SET[1:?] of MaterialIdentification
Occurrence	OPTIONAL SET[1:?] of Occurrence
SameAs	OPTIONAL SET[1:?] of ProxySelect
ShapeDependentProperty	OPTIONAL SET[1:?] of ShapeDependentProperty
ShapeElement	OPTIONAL SET[1:?] of ShapeElement
SurfaceCondition	OPTIONAL SET[1:?] of SurfaceCondition
ActivityAssignment	OPTIONAL SET[1:?] of ActivityAssignment
ActivityMethodAssignment	OPTIONAL SET[1:?] of ActivityMethodAssignment
ApprovalAssignment	OPTIONAL SET[1:?] of ApprovalAssignment

Entity AssemblyDefinition attributes	Attribute type
BreakdownVersionAssignment	OPTIONAL SET[1:?] of BreakdownVersionAssignment
DateAndPersonAssignment	OPTIONAL SET[1:?] of DateAndPersonAssignment
DatetimeAssignment	OPTIONAL SET[1:?] of DateTimeAssignment
DocumentAssignment	OPTIONAL SET[1:?] of DocumentAssignment
EffectivityAssignment	OPTIONAL SET[1:?] of EffectivityAssignment
EventAssignment	OPTIONAL SET[1:?] of EventAssignment
FrozenAssignment	OPTIONAL SET[1:?] of FrozenAssignment
InformationUsageRightAssignment	OPTIONAL SET[1:?] of InformationUsageRightAssignment
ModelPropertyAssignment	OPTIONAL SET[1:?] of ModelPropertyAssignment
OrganizationOrPersonInOrganizationAssignment	OPTIONAL SET[1:?] of OrganizationOrPersonInOrganizationAssignment
PartViewRelationship	OPTIONAL SET[1:?] of PartViewRelationship
PropertyDefinitionAssignment	OPTIONAL SET[1:?] of PropertyDefinitionAssignment
PropertyValueAssignment	OPTIONAL SET[1:?] of PropertyValueAssignment
RequirementAssignment	OPTIONAL SET[1:?] of RequirementAssignment
SecurityClassificationAssignment	OPTIONAL SET[1:?] of SecurityClassificationAssignment
SuppliedObjectRelationship	OPTIONAL SET[1:?] of SuppliedObjectRelationship
TimeIntervalAssignment	OPTIONAL SET[1:?] of TimeIntervalAssignment
ViewOccurrenceRelationship	OPTIONAL SET[1:?] of ViewOccurrenceRelationship
WorkRequestAssignment	OPTIONAL SET[1:?] of WorkRequestAssignment
AssemblyType	OPTIONAL ClassSelect
KinematicMechanismAssociation	OPTIONAL SET OF KinematicMechanismAssociation
MotionModelAssociation (if the Bugzilla issue <a href="#">#6003</a> is accepted)	OPTIONAL SET OF MotionModelAssociation

Table 22: "AssemblyDefinition" Attributes, including attributes inherited from "PartView"


### Attribute recommendations

- **AssemblyType:** the kind of the AssemblyDefinition. The value of this attribute need not be specified. The following are examples of recommended AssemblyType values:
  - 'functional assembly',
  - 'manufacturing assembly',
  - 'design assembly' .
- **ViewOccurrenceRelationship:** to assign an assembly link to the PartView. Use the "SingleOccurrence" template (see 7.1 for details) or "SpecifiedOccurrence" template (see 7.2 for details).

- In addition, all attributes and attribute recommendations for PartView apply.
- **KinematicMechanismAssociation:** to assign (optionally) one or multiple Mechanisms to the AssemblyDefinition. Use the “Mechanism” template (see Recommended Practices for AP242 BO Model XML Kinematics for details).
- **MotionModelAssociation:** to assign (optionally) one or multiple Kinematic Motions to the AssemblyDefinition. Use the “LinkMotionAlongPath” template (see Recommended Practices for AP242 BO Model XML Kinematics for details).

### 5.1.5 PartVersionRelationship

Used to relate several versions of the same part:

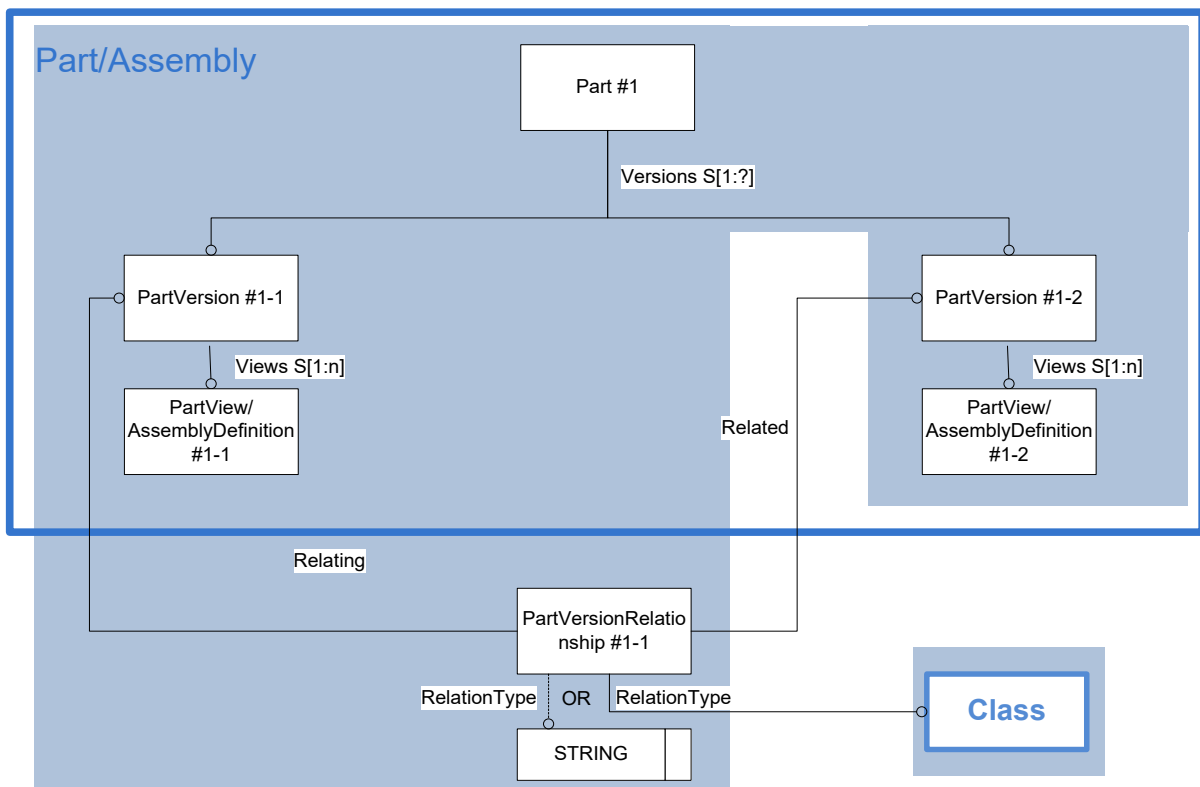

or of different parts.

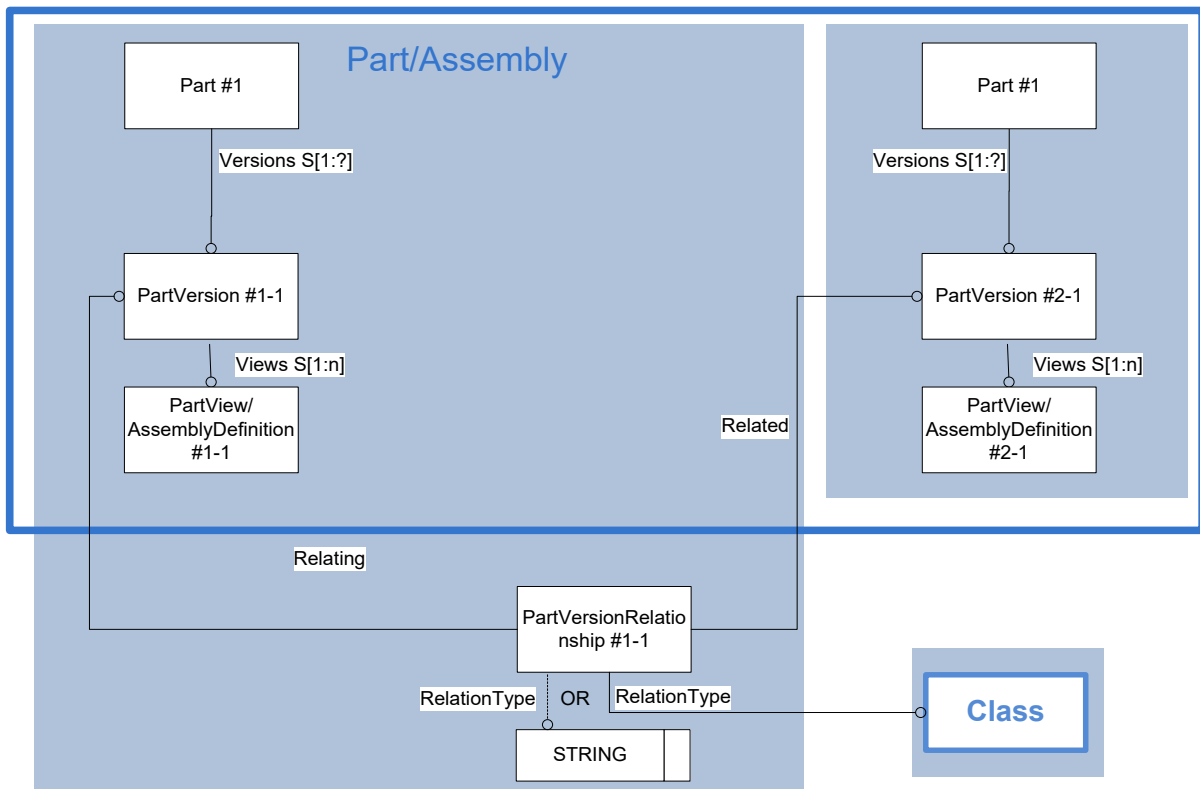


Figure 16: Template "PartVersionRelationship"

## The Instance Model: STEP exchange file format (ISO10303 AP242 BO Model XML syntax)

```

<Part uid="p--0000000017D374A0">
  <Id>
    <Identifier uid="pid--0000000017D374A0--id1" id="as1" idRoleRef=„,rl--
ii" idContextRef="o--000000178"/>
  </Id>
  <Name>
    <CharacterString>as1</CharacterString>
  </Name>
  ...
  <Versions>
    <PartVersion uid="pv--0000000017D374A0--id1">
      ...
      <Id id="A.1"/>
      ...
      <PartVersionRelationship uid="pvr--1">
        <Related uidRef="pv--0000000017D374A0--id2"/>
        <RelationType>
          <ClassString>sequence</ClassString>
        </RelationType>
      </PartVersionRelationship>
    </PartVersion>
    <PartVersion uid="pv--0000000017D374A0--id2">
      ...
      <Id id="A.2"/>
      ...
    </PartVersion>
  </Versions>

```

</Part>

Entity PartVersionRelationship attributes	Attribute type
ClassifiedAs	OPTIONAL SET[1:?] of Classification
Description	OPTIONAL DescriptorSelect
Id	OPTIONAL IdentifierSelect
Related	PartVersion
RelationType	ClassSelect
ActivityAssignment	OPTIONAL SET[1:?] of ActivityAssignment
ActivityMethodAssignment	OPTIONAL SET[1:?] of ActivityMethodAssignment
ApprovalAssignment	OPTIONAL SET[1:?] of ApprovalAssignment
CertificationAssignment	OPTIONAL SET[1:?] of CertificationAssignment
DateAndPersonAssignment	OPTIONAL SET[1:?] of DateAndPersonAssignment
DatetimeAssignment	OPTIONAL SET[1:?] of DateTimeAssignment
DocumentAssignment	OPTIONAL SET[1:?] of DocumentAssignment
EffectivityAssignment	OPTIONAL SET[1:?] of EffectivityAssignment
EventAssignment	OPTIONAL SET[1:?] of EventAssignment
FrozenAssignment	OPTIONAL SET[1:?] of FrozenAssignment
InformationUsageRightAssignment	OPTIONAL SET[1:?] of InformationUsageRightAssignment
ModelPropertyAssignment	OPTIONAL SET[1:?] of ModelPropertyAssignment
OrganizationOrPersonInOrganizationAssignment	OPTIONAL SET[1:?] of OrganizationOrPersonInOrganizationAssignment
PropertyDefinitionAssignment	OPTIONAL SET[1:?] of PropertyDefinitionAssignment
PropertyValueAssignment	OPTIONAL SET[1:?] of PropertyValueAssignment
TimeIntervalAssignment	OPTIONAL SET[1:?] of TimeIntervalAssignment

Table 23: "PartVersionRelationship" Attributes

### Attribute recommendations

- **Id:** the identifier or set of identifiers for the PartVersionRelationship. The value of this attribute need not be specified. Use IdentifierString type or "Identifier" template (see 4.6.6).
- **RelationType:** the meaning of the relationship. Use ClassString type if one of the values below is used, otherwise use "Class" template (see 4.6.4). According to the ISO AP242 Specification, where applicable, the following values shall be used:



RelationType	
'derivation'	The business object defines a deriving relationship where the related PartVersion is based on the relating PartVersion which is an earlier version of the same or of a different Part
'hierarchy'	The business object defines a hierarchical relationship where the related PartVersion is a subordinate version of the relating PartVersion
'sequence'	The business object defines a version sequence where the relating PartVersion is the preceding version of the related PartVersion that is the following version. For a given PartVersion there shall be at most one PartVersionRelationship of this relationType referring to this PartVersion as 'relating' and at most one PartVersionRelationship of this relationType referring as related
'supplied item'	The business object defines a relationship between two PartVersion objects (both exchanged in the same XML file) representing the same object in different organizational contexts, but having different contents (for example full assembly structure at the supplier and single part at the OEM)
'alternative'	The business object defines a relationship where the related PartVersion is an alternative to the relating PartVersion (not symmetric)  A bugzilla issue <a href="#">#8058</a> and <a href="#">#8081</a> have been created to add a new subtype of PartVersionRelationship called AlternatePartVersionRelationship (similar to AlternatePartRelationship) or to define 'alternative part version relationship' as RelationType

- **Related:** the other object of [PartVersion](#) that is part of the relationship
- Other attributes than these are not covered by these Recommended Practices; their use is discouraged as it would depend on mutual agreements between partners.

**Preprocessor Recommendations:**

- The relating and the related PartVersions shall be different objects
- In case of RelationType 'alternative', the relating and the related PartVersions shall belong to different Parts.
- In case of RelationType 'alternative', if the relation is symmetric in the source PDM system, then a reverse-relationship shall state that it applies in both directions.
- If there are more than one alternate part involved, a 'star' structure from the base PartVersion to each alternate PartVersion shall be mapped (this star maps the semantic, that there is a base PartVersion and a number of alternate PartVersions. All the alternate PartVersions are on the same semantical level, but not on the same semantical level than the base PartVersion.
- Alternate PartVersions shall have no revision effectivities and their usages shall have no occurrence effectivities, since the ones defined on the base part also apply to the alternate PartVersions.
- The combination of the base PartVersion and the alternate PartVersion shall be unique.

### **Postprocessor Recommendations:**

- If the target system does not support alternate PartVersionRelationship, but only AlternatePartRelationship (see section 0), it shall check if the same alternate rule applies to all versions of the alternate part for all versions of the base part and map them as one instance of AlternatePartRelationship. Otherwise, an error shall be returned and the PartVersionRelationships shall be ignored.

### **5.1.6 Distinction between Identifiers given by OEM and Supplier**

The same Parts and Assemblies may be assigned different identifiers by different and collaborating organizations, for example, by OEM and by suppliers. To exchange more than one identifier the data type IdentifierSet shall be used. In the context of Part and Assembly this applies specifically to Part.Id, PartVersion.Id and PartView.Id respectively AssemblyDefinition.Id.

This example shows that the same part (and its PartVersions) may have a different Identifier at an OEM and at its supplier:

```
<Class uid="rl--ii">
  <Id id="identification information"/>
</Class>
<Class uid="rl--eii">
  <Id id="exchange identification information"/>
</Class>
<Organization uid="o--000000178">
  <Id id="mercedes-benz.com"/>
  <Name>
    <CharacterString>Mercedes-Benz</CharacterString>
  </Name>
  <OrganizationTypes>
    <ClassString>company</ClassString>
  </OrganizationTypes>
</Organization>
<Organization uid="o--000000179">
  <Id id="bosch.com"/>
  <Name>
    <CharacterString>Bosch</CharacterString>
  </Name>
  <OrganizationTypes>
    <ClassString>company</ClassString>
  </OrganizationTypes>
</Organization>
<Part uid="p--000000001E60C660">
  <Id>
    <Identifier uid="pid--000000001E60C660--id6" id="bolt" idRoleRef=„rl--eii" idContextRef="o--000000178"/>
    <Identifier uid="pid--000000001E60C660--id7" id="BO-bolt" idRoleRef=„rl--ii" idContextRef="o--000000179"/>
  </Id>
  ...
  <Versions>
    <PartVersion uid="pv--000000001E60C660">
      ...
      <Id>
        <Identifier uid="pid--000000001EAA8110--id6" id="A.1" idRoleRef=„rl--eii" idContextRef="pid--000000001E60C660--id6"/>
      </Id>
    </PartVersion>
  </Versions>
</Part>
```

```

    <Identifier uid="pid--000000001EAA8110--id7" id="001,3" idRoleRef="rl--ii" idContextRef="pid--000000001E60C660--id7"/>
  </Id>
  ...
</PartVersion>
...
</Versions>
...
</Part>

```

Collaborating partners may mutually agree how many and which identifiers they want to exchange. The case that one organization assigns several identifiers to the same instance is covered by recommendations for template “Identifier” in chapter 4.6.6.

In order to avoid being obliged to exchange the full id list for all idContextRefs between the OEM, the tier-1 and the tier-n suppliers, the ids having the role ‘exchange identification information’ shall be exchanged (the others become optional) => it is sufficient that each exchange partner stores the mapping between the exchange id(s) and his own internal id. For a given Identifier, there shall be one or many ids with this value in idRoleRef (over all idContextRef values).

If a Part or Assembly is assigned identifiers by different organizations, ownership of the Part or Assembly shall be documented using template “OrganizationOrPersonInOrganizationAssignment”; see chapter 4.6.14. OrganizationOrPersonInOrganizationAssignment.role shall be given the value “owner” from Table 17. Thus, by matching the Organization in Identifier.idContextRef with the OrganizationOrPersonInOrganizationAssignment.assignedPersonOrOrganization.associatedOrganization that plays the role of “owner”, the original identifier of a Part or Assembly can be uniquely distinct from other identifiers.

The same applies to Document/DocumentVersion/DocumentDefinition and similarly identified objects.

```

<Class uid="rl--ii">
  <Id id="identification information"/>
</Class>
<Class uid="rl--eii">
  <Id id="exchange identification information"/>
</Class>

<Organization uid="o--000000178">
  <Id id="mercedes-benz.com"/>
  <Name>
    <CharacterString>Mercedes-Benz</CharacterString>
  </Name>
  <OrganizationTypes>
    <ClassString>company</ClassString>
  </OrganizationTypes>
</Organization>
<PersonInOrganization uid="pio--005-TPEVD-Mustermann">
  <AssociatedOrganization uidRef="o--000000178"/>
  <AssociatedPerson uidRef="pers--Mustermann"/>
  <Id>
    <Identifier uid="pio--005-TPEVD-Mustermann--1" id="005-TP/EVD-Mustermann" idRoleRef="rl--ii" idContextRef="o--000000178"/>
  </Id>
  <PersonRole>

```

```
<ClassString>employee</ClassString>
</PersonRole>
</PersonInOrganization>
<Part uid="p--000000001E60C660">
  <Id>
    <Identifier uid="pid--000000001E60C660--id6" id="bolt" idRoleRef=„rl--
eii" idContextRef="o--000000178"/>
    <Identifier uid="pid--000000001E60C660--id7" id="BO-bolt" idRol-
eRef=„rl--ii" idContextRef="o--000000179"/>
  </Id>
  ...
  <Versions>
    <PartVersion uid="pv--000000001E60C660">
      ...
      <Id>
        <Identifier uid="pid--000000001EAA8110--id6" id="A.1" idRol-
eRef=„rl--eii" idContextRef="pid--000000001E60C660--id6"/>
        <Identifier uid="pid--000000001EAA8110--id7" id="001,3" idRol-
eRef=„rl--ii" idContextRef="pid--000000001E60C660--id7"/>
      </Id>
      ...
      <OrganizationOrPersonInOrganizationAssignment uid="poa--
0000000017D374A0--id1">
        <AssignedPersonOrOrganization uidRef="pio--005-TPEVD-Mustermann"/>
        <Role>
          <ClassString>owner</ClassString>
        </Role>
      </OrganizationOrPersonInOrganizationAssignment>
      ...
    </PartVersion>
  </Versions>
  ...
</Part>
```

## 6 Part Properties

### 6.1 Template "GeometricModel"

The aim of this section is to specify the method for attaching a shape to a part and linking this shape to an external file.

The GeometricModel entity represents the shape of the Part through the PartView and the ExternalGeometricModel subtype entity allow a DigitalFile to be attached to the shape.

The different usage of the subtypes will be detailed in the chapter 6.1.1.

#### The Instance Model: AP242 BO Model XML entities and attributes

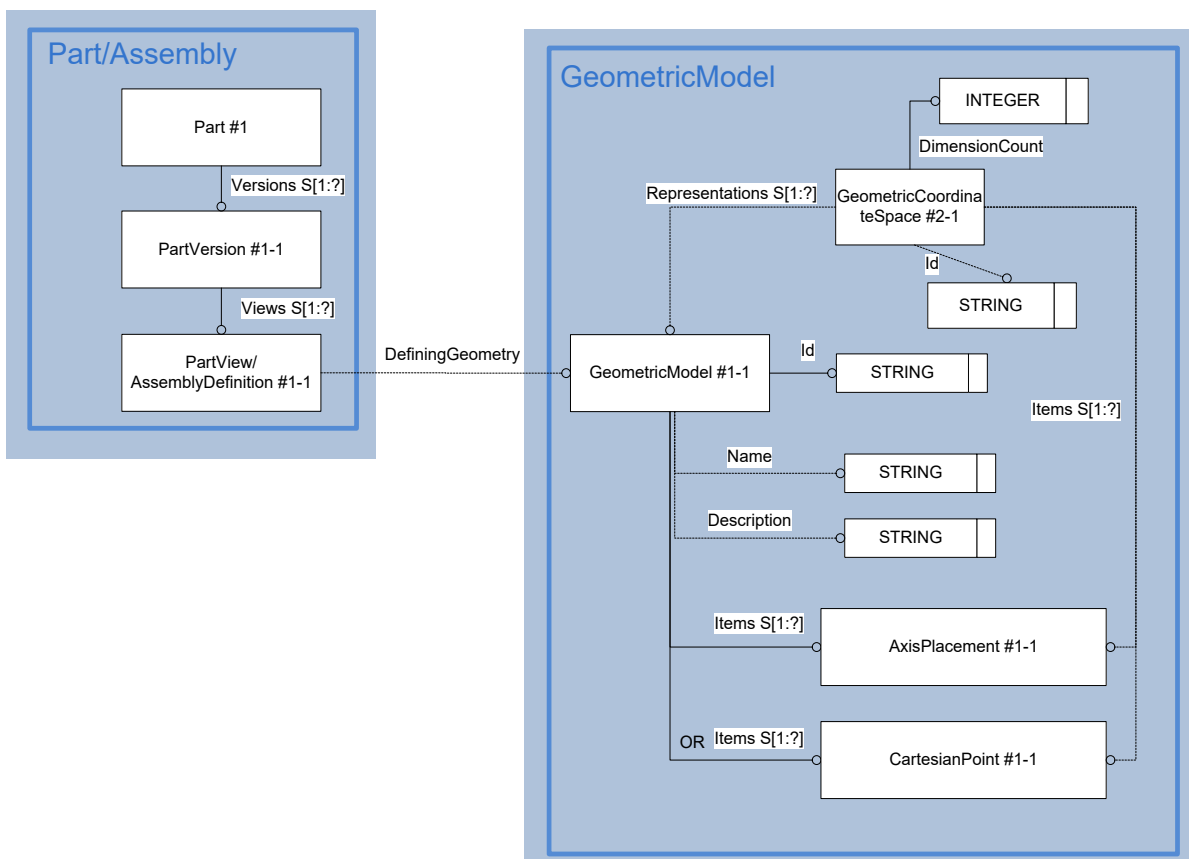


Figure 17: Template "GeometricModel"

ENTITY GeometricModel	Attribute Type
ClassifiedAs	OPTIONAL SET[1:?] of Classification
Description	OPTIONAL DescriptorSelect
Id	IdentifierSelect
Items	SET[1:?] of RepresentationItem
Name	OPTIONAL DescriptorSelect
RepresentationTypes	OPTIONAL SET[1:?] of ClassSelect

ENTITY GeometricModel	Attribute Type
VersionId	OPTIONAL IdentifierSelect
RepresentationRelationship	OPTIONAL SET[1:?] of RepresentationRelationship
ActivityAssignment	OPTIONAL SET[1:?] of ActivityAssignment
ApprovalAssignment	OPTIONAL SET[1:?] of ApprovalAssignment
DateAndPersonAssignment	OPTIONAL SET[1:?] of DateAndPersonAssignment
DateTimeAssignment	OPTIONAL SET[1:?] of DateTimeAssignment
EffectivityAssignment	OPTIONAL SET[1:?] of EffectivityAssignment
EventAssignment	OPTIONAL SET[1:?] of EventAssignment
FrozenAssignment	OPTIONAL SET[1:?] of FrozenAssignment
InformationUsageRightAssignment	OPTIONAL SET[1:?] of InformationUsageRightAssignment
OrganizationOrPersonInOrganizationAssignment	OPTIONAL SET[1:?] of OrganizationOrPersonInOrganizationAssignment
SecurityClassificationAssignment	OPTIONAL SET[1:?] of SecurityClassificationAssignment
SuppliedObjectRelationship	OPTIONAL SET[1:?] of SuppliedObjectRelationship
TimeIntervalAssignment	OPTIONAL SET[1:?] of TimeIntervalAssignment
ModelExtent	OPTIONAL STRING
ModelProperty	OPTIONAL SET[1:?] of ModelProperty

Table 24: "GeometricModel" Attributes

### Attribute recommendations

- **Description:** the text or the set of texts that provides further information about the GeometricModel. The value of this attribute need not be specified. Use "Description" template (see 4.6.7).
- The **Id** attribute is the text that represents an identifying name or code. Use IdentifierString.
- The **Items** attribute is the SET of elements representing the different kind of representation item attached to a shape. Reference to AxisPlacement (see below), CartesianPoint (see section 13.1.2 for examples) or KinematicPair element.
- **Name:** the words or set of words by which the GeometricModel is known. The value of this attribute need not be specified. Use "Description" template (see 4.6.7).
- Other attributes than these are not covered by these Recommended Practices; their use is discouraged as it would depend on mutual agreements between data exchange partners.

ENTITY GeometricCoordinateSpace	Attribute Type
Accuracies	OPTIONAL SET[1:?] of MeasureQualification
Id	IdentifierSelect
Units	OPTIONAL SET[1:?] of Unit

ENTITY GeometricCoordinateSpace	Attribute Type
Representations	OPTIONAL SET[1:?] of Representation
Items	OPTIONAL SET[1:?] of Items
DimensionCount	Integer

Table 25: "GeometricCoordinateSpace" Attributes

### Attribute recommendations

- The **Id** attribute is the text that represents an identifying name or code. Use IdentifierString type.
- **Units**: the various units in which any values are expressed. The same length unit is applied to each coordinate direction. Only one unit of a kind shall be specified. The value of this attribute need not be specified except if the length unit deviates from the ExchangeContext.DefaultUnit.
- The **Representations** attribute is the SET of elements representing the different kind of representations defined in the Coordinate Space. Reference to GeometricModel (see 6.1), KinematicLink or Mechanism element.
- The **Items** attribute is the SET of elements representing the different kind of representation items in the Coordinate Space. Reference to AxisPlacement (see below), CartesianPoint (see section 13.1.2 for examples) or KinematicPair.
- The **DimensionCount** attribute specifies the dimensionality.
- Other attributes than these are not covered by these Recommended Practices; their use is discouraged as it would depend on mutual agreements between data exchange partners.

**Remark:** the recommendation of the AP242 ARM specification: "In the case where geometric elements are defined in the GeometricCoordinateSpace, there shall be at least two units specified, the length unit and the plane angle unit" does not apply in general (see below).

### Preprocessor Recommendations:

- The value of GeometricCoordinateSpace.Items shall be the sum of all the GeometricCoordinateSpace.Representations[here as GeometricModels].Items
- The length unit used in the positioning (implicit/explicit transformation) and in the ExternalGeometricModel shall be the same.
- The use of GeometricCoordinateSpace.Units is necessary only in either of the following cases:
  - no default length unit is given in the ExchangeContext
  - the length unit of a particular assembly node deviates from the default length unit (so-called 'mixed-unit assembly')
  - angles are defined (for example for Lower/UpperLimits of KinematicPairs).
- If elements with different length or angle units are required, they each have to have their own GeometricCoordinateSpace

### Postprocessor Recommendations:

- The default length unit defined in ExchangeContext applies to all positioning information as well as within the ExternalGeometricModels, except if on the level of an assembly node another length unit is specified in ExternalGeometricModel.Units.

ENTITY AxisPlacement	Attribute Type
External	OPTIONAL ExternalItem
Name	OPTIONAL DescriptorSelect
Axis	OPTIONAL String
Position	String
RefDirection	OPTIONAL String

Table 26: "AxisPlacement" Attributes

### Attribute recommendations

- **Name:** the words or set of words by which the AxisPlacement is known. The value of this attribute need not be specified. Use of CharacterString element.
- **Axis:** the relative x, y and z value specifying the direction of the local Z axis of the AxisPlacement. The value of this attribute need not be specified. An issue has been created in Bugzilla under [#8182](#) in order to add this statement (coming from AP214): If Axis is not provided, then Axis shall be assumed to have the value (0, 0, 1).
- **Position:** the absolute x, y and z value (in the GeometricCoordinateSpace they are defined in) specifying the origin position of the AxisPlacement.

Remark: As stated in the ISO 10303-3001 documentation, the coordinates in each AxisPlacement are absolute in the GeometricCoordinateSpace there are defined in. The combination of two AxisPlacements in a GeometricRepresentationRelationshipWithPlacementTransformation provides a relative placement.

An issue has been created in Bugzilla under [#8182](#) in order to add this statement (coming from AP214):

Remark: If both Axis and RefDirection are not provided, the AxisPlacement describes a pure translation without rotation.

- **RefDirection:** the relative x, y and z value specifying the reference direction for the local X axis of the AxisPlacement. The value of this attribute need not be specified. An issue has been created in Bugzilla under [#8182](#) in order to add this statement (coming from AP214): If RefDirection is not provided then RefDirection shall be assumed to have the value (1, 0, 0)
- Other attributes than these are not covered by these Recommended Practices; their use is discouraged as it would depend on mutual agreements between data exchange partners.

### Preprocessor Recommendations:

- The GeometricCoordinateSpace.DimensionCount must be greater than 0.
- If a RefDirection is given, it shall be specified so that it is orthogonal to the Axis.
- In case of relative positioning, each Geometry shall be associated to its own GeometricCoordinateSpace.

**Postprocessor Recommendations:** None specified.

**Related Entities:** There are no specific related entities.



ENTITY CartesianPoint	Attribute Type
External	OPTIONAL ExternalItem
Name	OPTIONAL DescriptorSelect
Coordinates	LIST [2:3] of LengthMeasure

Table 27: "CartesianPoint" Attributes

### Attribute recommendations

- **Name:** the words or set of words by which the CartesianPoint is known. The value of this attribute need not be specified. Use of CharacterString element.
- **Coordinates:** is a list, the individual elements of this list are defined below:
  - coordinates[1]: The first coordinate of the CartesianPoint location.
  - coordinates[2]: The second coordinate of the CartesianPoint location.
  - coordinates[3]: The third coordinate of the CartesianPoint location.
- Other attributes than these are not covered by these Recommended Practices; their use is discouraged as it would depend on mutual agreements between data exchange partners.

### Preprocessor Recommendations:

- The third coordinate will not exist in the case of a two-dimensional point.
- The CartesianPoint is defined by its coordinates in a rectangular Cartesian coordinate system.

**Postprocessor Recommendations:** None specified.

**Related Entities:** There are no specific related entities.

### The Instance Model: STEP exchange file format (ISO10303 AP242 BO Model XML syntax)

```

...
<PartView uid="pvv--000000001AA415B0--id6">
  <DefiningGeometry uidRef="egm--000000001AA415B0"/>
  ...
</PartView>
...
<RepresentationContext uid="ccs--origin-bolt" xsi:type="n0:GeometricCoordinateSpace">
  <Id id="/NULL"/>
  <Representations>
    <Representation uid="egm--000000001AA415B0" xsi:type="n0:ExternalGeometricModel">
      <Id id="bolt.stp"/>
      <Items>
        <RepresentationItem uidRef="repi--000000001AA415B0--18"/>
      </Items>
      <ExternalFile uidRef="df--000000001AA415B0"/>
    </Representation>
  </Representations>
  <Items>
    <RepresentationItem xsi:type="n0:AxisPlacement" uid="repi--000000001AA415B0--18">
      <Position>0.0 0.0 0.0</Position>
    </RepresentationItem>
  </Items>

```

```
<DimensionCount>3</DimensionCount>
</RepresentationContext>
```

### 6.1.1 ExternalGeometricModel / ComposedGeometricModel

The ExternalGeometricModel / ComposedGeometricModel entities are subtype of the GeometricModel.

Entity ComposedGeometricModel / ExternalGeometricModel	Attribute type
ClassifiedAs	OPTIONAL SET[1:?] of Classification
Description	OPTIONAL DescriptorSelect
Id	IdentifierSelect
Items	SET[1:?] of AxisPlacement
Name	OPTIONAL DescriptorSelect
RepresentationTypes	OPTIONAL SET[1:?] of ClassSelect
VersionId	OPTIONAL IdentifierSelect
RepresentationRelationship	OPTIONAL SET[1:?] of RepresentationRelationship
ActivityAssignment	OPTIONAL SET[1:?] of ActivityAssignment
ApprovalAssignment	OPTIONAL SET[1:?] of ApprovalAssignment
DateAndPersonAssignment	OPTIONAL SET[1:?] of DateAndPersonAssignment
DateTimeAssignment	OPTIONAL SET[1:?] of DateTimeAssignment
EffectivityAssignment	OPTIONAL SET[1:?] of EffectivityAssignment
EventAssignment	OPTIONAL SET[1:?] of EventAssignment
FrozenAssignment	OPTIONAL SET[1:?] of FrozenAssignment
InformationUsageRightAssignment	OPTIONAL SET[1:?] of InformationUsageRightAssignment
OrganizationOrPersonInOrganizationAssignment	OPTIONAL SET[1:?] of OrganizationOrPersonInOrganizationAssignment
SecurityClassificationAssignment	OPTIONAL SET[1:?] of SecurityClassificationAssignment
SuppliedObjectRelationship	OPTIONAL SET[1:?] of SuppliedObjectRelationship
TimeIntervalAssignment	OPTIONAL SET[1:?] of TimeIntervalAssignment
ModelExtent	OPTIONAL STRING
ModelProperty	OPTIONAL SET[1:?] of ModelProperty
(only for ExternalGeometricModel) ExternalFile	DigitalFile
(only for ExternalGeometricModel) Parameter-Values	OPTIONAL SET[1:?] OF PropertyValue

Table 28: "ComposedGeometricModel" / "ExternalGeometricModel" Attributes

### **Attribute recommendations**

- **RepresentationRelationship:** add for each element stored in 'Items' an instance of RepresentationRelationship to the ComposedGeometricModel. This attribute shall not be used in the case of an ExternalGeometricModel, but shall be used in the case of a ComposedGeometricModel
- **ActivityAssignment:** the Activities associated to the GeometricModel. The value of this attribute need not be specified. Use "Activity" template (see Recommended Practices for AP242 XML Change Management).
- **ExternalFile:** the DigitalFile that contains the externally defined geometry information. Use "DigitalFile" template (see 9.1)
- The other attributes are either not covered by these Recommended Practices, or it is not recommended to use them for the purpose of these Recommended Practices.
- In addition, all attributes and attribute recommendations for GeometricModel apply.

The attribute ExternalGeometricModel.ExternalModel is described in the chapter 8.2.

**Preprocessor Recommendations:** None specified.

**Postprocessor Recommendations:** None specified.

**Related Entities:** There are no specific related entities.

### **The Instance Model: STEP exchange file format (ISO10303 AP242 BO Model XML syntax)**

```
...
<RepresentationContext uid="ccs--origin-bolt" xsi:type="n0:GeometricCoordinateSpace">
  <Id id="/NULL"/>
  <Representations>
    <Representation uid="egm--000000001AA415B0"
xsi:type="n0:ExternalGeometricModel">
      <Id id="bolt.stp"/>
      <Items>
        <RepresentationItem uidRef="repi--000000001AA415B0--18"/>
      </Items>
    </Representation>
  </Representations>
</RepresentationContext>
```

## 6.1.2 The subtype of ExternalGeometricModel

The BO Model allows further specification of which type of geometry is contained in an external model. For this purpose, a number of subtypes of ExternalGeometricModel are de-fined. These subtypes do not add any additional attributes; they carry the additional information in their name. The subtypes of ExternalGeometricModel are:

- ExternalAdvancedBrepShapeRepresentation,
- ExternalCsgShapeRepresentation,
- ExternalCurveSweptSolidShapeRepresentation,
- ExternalEdgeBasedWireframeShapeRepresentation,
- ExternalElementaryBrepShapeRepresentation,
- ExternalFacetedBrepShapeRepresentation,
- ExternalGeometricallyBoundedSurfaceShapeRepresentation,
- ExternalGeometricallyBoundedWireframeShapeRepresentation,
- ExternalManifoldSurfaceShapeRepresentation,
- ExternalShellBasedWireframeShapeRepresentation,
- ExternalTessellatedShapeRepresentation

are optional (since ExternalGeometricModel is not defined as ABSTRACT) and mutually exclusive (ONEOF)

### ***Preprocessor Recommendations:***

- If a geometry file contains exact BREP geometry combined with tessellated geometry), ExternalAdvancedBrepShapeRepresentation shall be used

### ***Postprocessor Recommendations:***

- If some of the subtypes are not supported by the converter, the general behavior shall be 'only for information', and shall not cause the postprocessor to stop processing. The post-processor shall load and import the file correctly.

## 6.2 Template “PropertyAssignment”

In the same way than in section 3.1 of the PDM Schema Usage Guide V4.3, the aim of this section is to specify how to attach a property to a part.

The PropertyValueAssignment entity represents the attachment of the PartView to the value represented via the “NumericalValue” (see 4.6.9) or “StringValue” templates (see 4.6.10).

***Preprocessor Recommendations:*** It is recommended that all the part properties use the same PropertyValueAssignment.

## The Instance Model: AP242 BO Model XML entities and attributes

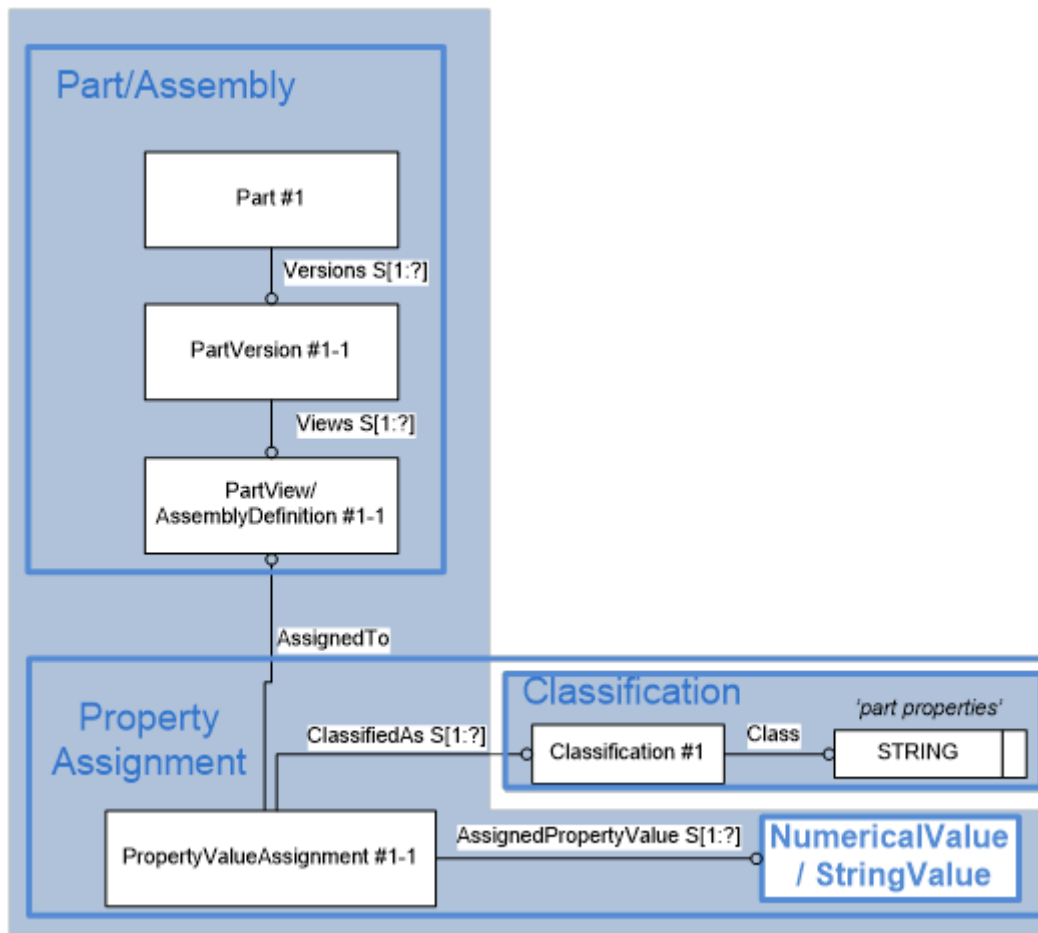


Figure 18: Template "PropertyAssignment"

ENTITY PropertyValueAssignment	Attribute Type
AssignedPropertyValues	SET[1:?] of PropertyValue
ClassifiedAs	OPTIONAL SET[1:?] of Classification
Description	OPTIONAL DescriptorSelect
Id	OPTIONAL IdentifierSelect
Role	OPTIONAL ClassSelect
ActivityAssignment	OPTIONAL SET[1:?] of ActivityAssignment
ActivityMethodAssignment	OPTIONAL SET[1:?] of ActivityMethodAssignment
ApprovalAssignment	OPTIONAL SET[1:?] of ApprovalAssignment
AssignmentObjectRelationship	OPTIONAL SET[1:?] of AssignmentObjectRelationship
ConditionAssignment	OPTIONAL SET[1:?] of ConditionAssignment
DateAndPersonAssignment	OPTIONAL SET[1:?] of DateAndPersonAssignment
DateTimeAssignment	OPTIONAL SET[1:?] of DateTimeAssignment
DocumentAssignment	OPTIONAL SET[1:?] of DocumentAssignment
EffectivityAssignment	OPTIONAL SET[1:?] of EffectivityAssignment
EventAssignment	OPTIONAL SET[1:?] of EventAssignment

ENTITY PropertyValueAssignment	Attribute Type
FrozenAssignment	OPTIONAL SET[1:?] of FrozenAssignment
InformationUsageRightAssignment	OPTIONAL SET[1:?] of InformationUsageRightAssignment
ModelPropertyAssignment	OPTIONAL SET[1:?] of ModelPropertyAssignment
OrganizationOrPersonInOrganizationAssignment	OPTIONAL SET[1:?] of OrganizationOrPersonInOrganizationAssignment
PropertyDefinitionAssignment	OPTIONAL SET[1:?] of PropertyDefinitionAssignment
PropertyValueAssignment	OPTIONAL SET[1:?] of PropertyValueAssignment
PropertyValueAssignmentRelationship	OPTIONAL SET[1:?] of PropertyValueAssignmentRelationship
SecurityClassificationAssignment	OPTIONAL SET[1:?] of SecurityClassificationAssignment
TimeIntervalAssignment	OPTIONAL SET[1:?] of TimeIntervalAssignment
ValueAssignmentContext	OPTIONAL PropertyDefinitionAssignment

Table 29: "PropertyAssignment" Attributes

### Attribute recommendations

- The **AssignedPropertyValues** attribute is the SET of element references representing the properties attached to the Part. Use "NumericalValue" (see 4.6.9) or "StringValue" templates (see 4.6.10).

The ClassifiedAs attribute shall be represented by the template "Classification" (see 4.6.5). Use the following values:

ClassString	Explanation
'validation properties'	the AssignedPropertyValues are of type validation properties associated to a PartView according to section 0
'part master properties'	the AssignedPropertyValues are of type part properties associated to a Part according to section 5.1.1
'part properties'	the AssignedPropertyValues are of type part properties associated to a PartView, PartViewRelationship, NextAssemblyOccurrenceUsage, SpecifiedOccurrence, AlternatePartRelationship, AssemblyOccurrenceRelationshipSubstitution or AssemblyViewRelationshipSubstitution according to the current section or section 7.4, 7.1, 7.2, 0, 7.5.2, 7.5.3, or GeneralShapeDependentProperty according to section 6.3
'document master properties'	the AssignedPropertyValues are of type document properties associated to a DocumentDefinition according to section 10.5. An issue has been created in Bugzilla under <a href="#">#6020</a> in order to enable Document (like Part) to have PropertyValueAssignments.
'document properties'	the AssignedPropertyValues are of type document properties associated to a DocumentDefinition or DigitalFile according to section 10.5

'work request properties'	the AssignedPropertyValues are of type activity properties associated to a WorkRequest according to the Recommended Practices for AP242 XML Change Management
'work order properties'	the AssignedPropertyValues are of type activity properties associated to a WorkOrder according to the Recommended Practices for AP242 XML Change Management
'activity properties'	the AssignedPropertyValues are of type activity properties associated to an Activity or ActivityAssignment according to the Recommended Practices for AP242 XML Change Management

Other attributes than these are not covered by these Recommended Practices; their use is discouraged as it would depend on mutual agreements between data exchange partners.

**Preprocessor Recommendations:** It is recommended that all the properties attached to a Part (i.e. its PartView or AssemblyDefinition) are spread over two instances of PropertyValueAssignment. One instance shall collect the properties that describe the Part; the other instance shall collect the properties that describe the validation properties of the same Part.

**Postprocessor Recommendations:** None specified.

**Related Entities:** There are no specific related entities.

### The Instance Model: STEP exchange file format (ISO10303 AP242 BO Model XML syntax)

```
<Classification uid="ID_63">
  <Class>
    <ClassString>part properties</ClassString>
  </Class>
</Classification>
<Classification uid="ID_217">
  <Class>
    <ClassString>validation properties</ClassString>
  </Class>
</Classification>

<Part uid="p--0000000017D374A0">
...
  <Versions>
    <PartVersion uid="pv--0000000017D374A0--id1">
...
      <Views>
        <PartView xsi:type="n0:AssemblyDefinition" uid="pvv--0000000017D374A0--id1">
...
          <PropertyValueAssignment uid="ID_170">
            <AssignedPropertyValues>
              <PropertyValue uid="ID_156" xsi:type="n0:NumericalValue">
                <Definition>
                  <PropertyDefinition uidRef="ID_154"/>
                </Definition>
                <Name>
                  <CharacterString>PDMIFPartReal_xxx</CharacterString>
                </Name>
                <Unit uidRef="ID_155"/>
                <ValueComponent>5.678000000000000E+00</ValueComponent>
              </PropertyValue>
              <PropertyValue uid="ID_164" xsi:type="n0:StringValue">
```

```
        <Definition>
          <PropertyDefinition uidRef="ID_163"/>
        </Definition>
        <Name>
          <CharacterString>PDMIFPartInt_xxx</CharacterString>
        </Name>
        <ValueComponent>
          <CharacterString>2</CharacterString>
        </ValueComponent>
      </PropertyValue>
    ...
  </AssignedPropertyValues>
  <ClassifiedAs>
    <Classification uidRef="ID_63"/>
  </ClassifiedAs>
</PropertyValueAssignment>
<PropertyValueAssignment uid="ID_225">
  <AssignedPropertyValues>
    <PropertyValue uid="ID_224" xsi:type="n0:NumericalValue">
      <Definition>
        <PropertyDefinition uidRef="ID_216"/>
      </Definition>
      <Name>
        <CharacterString>number of children</CharacterString>
      </Name>
      <Unit uidRef="ID_x543008816"/>
      <ValueComponent>4</ValueComponent>
    </PropertyValue>
  </AssignedPropertyValues>
  <ClassifiedAs>
    <Classification uidRef="ID_217"/>
  </ClassifiedAs>
</PropertyValueAssignment>
...
  </PartView>
</Views>
...
  </PartVersion>
</Versions>
</Part>

<PropertyDefinition uid="ID_154">
  <Id id="general property"/>
  <PropertyType>
    <ClassString>customized PDM property</ClassString>
  </PropertyType>
</PropertyDefinition>
<PropertyDefinition uid="ID_163">
  <Id id="general property"/>
  <PropertyType>
    <ClassString>customized PDM property</ClassString>
  </PropertyType>
</PropertyDefinition>
<PropertyDefinition uid="ID_216">
  <Id id="quality property"/>
  <PropertyType>
    <ClassString>assembly validation property</ClassString>
  </PropertyType>
</PropertyDefinition>
```



### 6.3 Template “ShapeDependentProperty”

In the same way as in section 3.2 of the PDM Schema Usage Guide V4.3, the aim of this section is to specify how to attach a property to part shape.

The ShapeDependentProperty entity represents the characteristic of the shape, or of a portion of the shape of a PartView.

It is recommended to use the subtypes of ShapeDependentProperty in the following way:

- The CentreOfMass entity for the centre of the mass of a body.
  - Note that material properties, such as density and weight, are currently not in scope of this document. Hence, the terms “center of mass”, “center of geometry” and “centroid” are used synonymously.
- The MomentsOfInertia entity to describe the matrix of inertia of a rigid body.
  - Note: MomentsOfInertia is currently not in scope of this document.
- The GeneralShapeDependentProperty to define a user-defined characteristic of an object.

For the time being, the current version of this document describes only the subtypes GeneralShapeDependentProperty (in this chapter) and CentreOfMass (in section 13.1.2).

#### 6.3.1 GeneralShapeDependentProperty

##### The Instance Model: AP242 BO Model XML entities and attributes

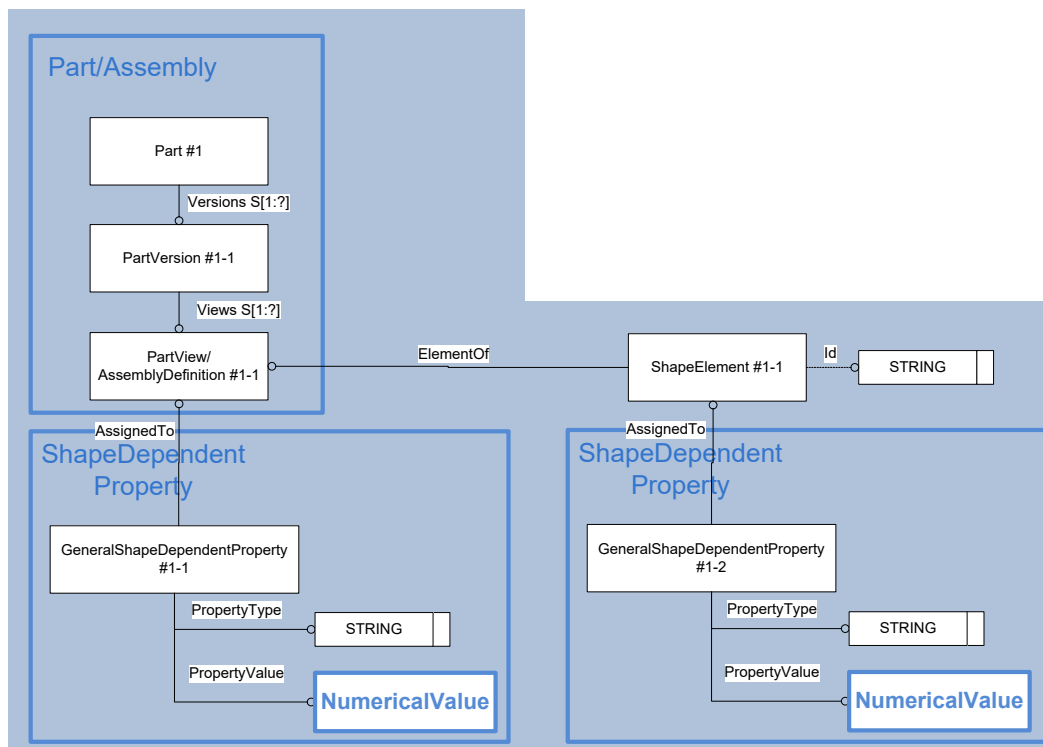


Figure 19: Template “ShapeDependentProperty” for either PartView or ShapeElement

ENTITY	Attribute Type
GeneralShapeDependentProperty	
ClassifiedAs	OPTIONAL SET[1:?] of Classification
DefinedIn	OPTIONAL GeometricCoordinateSpace
Description	OPTIONAL DescriptorSelect
Id	OPTIONAL IdentifierSelect
Role	OPTIONAL ClassSelect
ValueDetermination	OPTIONAL ClassSelect
PropertyType	PropertyDefinitionSelect
PropertyValue	PropertyValueSelect
Unit	OPTIONAL Unit

Table 30: "GeneralShapeDependentProperty" Attributes

### Attribute recommendations

- The **PropertyType** attribute the text by which the type of the property is described. Use PropertyDefinitionString type. Where applicable, the same values shall be used as in chapter 12.2  
 Since the PropertyValue has also a PropertyType (PropertyValue.Definition.PropertyType), an issue in Bugzilla ([#6021](#)) has been created to clarify the added value of GeneralShapeDependentProperty.PropertyType.
- The **PropertyValue** attribute is the element reference representing the properties attached to the Part. Use "NumericalValue" templates (see 4.6.9).
- Other attributes than these are not covered by these Rec. Practices; their use is discouraged as it would depend on mutual agreements between data exchange partners.

ENTITY ShapeElement	Attribute Type
ClassifiedAs	OPTIONAL SET[1:?] of Classification
Description	OPTIONAL DescriptorSelect
Id	OPTIONAL IdentifierSelect
MaterialIdentification	OPTIONAL SET[1:?] of MaterialIdentification
Name	OPTIONAL DescriptorSelect
RepresentedGeometry	OPTIONAL SET[1:?] of RepresentedGeometry
ShapeDependentProperty	OPTIONAL SET[1:?] of ShapeDependentProperty
SurfaceCondition	OPTIONAL SET[1:?] of SurfaceCondition
ThicknessSizeDimension	OPTIONAL SET[1:?] of ThicknessSizeDimension
DocumentAssignment	OPTIONAL SET[1:?] of DocumentAssignment
InformationUsageRightAssignment	OPTIONAL SET[1:?] of InformationUsageRightAssignment
ModelPropertyAssignment	OPTIONAL SET[1:?] of ModelPropertyAssignment
PropertyDefinitionAssignment	OPTIONAL SET[1:?] of PropertyDefinitionAssignment
PropertyValueAssignment	OPTIONAL SET[1:?] of PropertyValueAssignment
ShapeElementRelationship	OPTIONAL SET[1:?] of ShapeElementRelationship

Table 31: "ShapeElement" Attributes

## Attribute recommendations

- The **Id** attribute is the text that represents an identifying name or code for the portion of shape. It's recommended to set this attribute. Use IdentifierString type.

Other attributes than these are not covered by these Recommended Practices; their use is discouraged as it would depend on mutual agreements between data exchange partners.

**Remark:** Several subtype of ShapeElement exists, until a clarification on the usage of each subtypes for now we don't recommend to use them and to use the supertype ShapeElement.

**Preprocessor Recommendations:** When applicable, the following values shall be used for the attribute PropertyType:

- 'centroid': The PropertyValue identifies the centre point of the mass of a body. The relative position of this point within the body is an invariant datum relative to rotation and translation.
  - Example: GeneralShapeDependentProperty with propertyType 'centroid' is used instead of the object CentreOfMass: sometimes the GeneralShapeDependentProperty is calculated by some system at some point of time. But there are cases where the information, e.g., the GeneralShapeDependentProperty of a die, is transferred into a following stage, e.g., in order to perform a feasibility check, where there is only a simplified shape representation that does not allow the calculation of the exact GeneralShapeDependentProperty. Yet, in this stage the information about the GeneralShapeDependentProperty is needed in order to check whether the transport of a die with a crane is feasible.
- 'surface area': The PropertyValue specifies the overall surface of the bodies contained in the referenced shape.
- 'volume': The PropertyValue specifies the overall volume of the bodies contained in the referenced shape.

**Postprocessor Recommendations:** None specified.

**Related Entities:** There are no specific related entities.

## The Instance Model: STEP exchange file format (ISO10303 AP242 BO Model XML syntax)

```
<Part uid="p--0000000017086CB0">
  <Id>
    <Identifier uid="pid--0000000017086CB0--id1" id="as1" idRoleRef=",,rl--ii" idContextRef="o--000000178"/>
  </Id>
  <Name>
    <CharacterString>as1</CharacterString>
  </Name>
  <PartTypes>
    <ClassString>assembly</ClassString>
  </PartTypes>
  <Versions>
    <PartVersion uid="pv--0000000017086CB0--id1">
      <Id id="/NULL"/>
      <Views>
        <PartView xsi:type="n0:AssemblyDefinition" uid="pvv--0000000017086CB0--id1">
          <InitialContext uidRef="ac--mechanicaldesign--design"/>
          <ShapeDependentProperty uid="sdp--000000782" xsi:type="n1:GeneralShapeDependentProperty">
            <PropertyType>
```

```

    <PropertyDefinitionString>user defined attribute</PropertyDefinitionString>
  </PropertyType>
  <PropertyValue>
    <NumericalValue>
      <Definition>
        <PropertyDefinition uidRef="pd--000000320/">
        </Definition>
      <Name>
        <CharacterString>volume</CharacterString>
      </Name>
      <Unit uidRef="u--00000000"></Unit>
      <ValueComponent>120</ValueComponent>
    </NumericalValue>
  </PropertyValue>
</ShapeDependentProperty>
<ShapeElement uid="se--1">
  <Id id="/NULL"/>
  <ShapeDependentProperty uid="sdp--100000782" xsi:type="n0:GeneralShapeDependentProperty">
    <PropertyType>
      <PropertyDefinitionString>user defined attribute</PropertyDefinitionString>
    </PropertyType>
    <PropertyValue>
      <NumericalValue>
        <Definition>
          <PropertyDefinition uidRef="pd--000000320/">
          </Definition>
        <Name>
          <CharacterString>volume</CharacterString>
        </Name>
        <Unit uidRef="u--000000004"/>
        <ValueComponent>120</ValueComponent>
      </NumericalValue>
    </PropertyValue>
  </ShapeDependentProperty>
</ShapeElement>
</PartView>
</Views>
</PartVersion>
</Versions>
</Part>

<Unit uid="u--000000009">
  <Kind><ClassString>Unspecified SI derived unit</ClassString></Kind>
  <Name><ClassString>cubic metre</ClassString></Name>
  <Prefix><ClassString>milli</ClassString></Prefix>
  <Quantity><ClassString>volume</ClassString></Quantity>
</Unit>

<PropertyDefinition uid="pd--000000320">
  <Id id="quality property"/>
  <PropertyType>
    <ClassString>user defined attribute</ClassString>
  </PropertyType>
</PropertyDefinition>

```

## 7 Part Structure and Relationships

The aim of this section is to map a multi-level assembly, possibly containing multiple individual occurrences of the same component, and to position (orientation and location) each occurrence in 3D relatively to its usage in the next higher assembly. It does this in the same way that section 4.2 of the PDM Schema Usage Guide V4.3 accomplishes it.

For this reason, the use of PartViewRelationship is not recommended (except in special cases described in section 7.4), since (according to AP242-ISO document in chapter 4.2.3 Assembly structure):

“In the part view based assembly structure concept, a specific part occurrence can be identified by a single PartViewRelationship object, i.e. part occurrences can exist only in the context of an assembly structure, whereas in the part occurrences based assembly structure concept, part occurrences can exist independent of an assembly that uses the product occurrences as constituents.”

**Note** that occurrences are usually not created manually by themselves. A user creates a link (usage) between two part views or assembly definitions; the occurrence gets created automatically in the process. Occurrences not used by any other element shall not be exchanged.

From the three possible kinds of occurrences in AP242 BO Model (derived from the abstract supertype ‘Occurrence’), only these two are in scope of this document:

- SingleOccurrence: has no owned attributes, but enables to position (orientation and location) each occurrence in 3D
- SpecifiedOccurrence: enable to distinct between multiple individual occurrences of the same component. This may i.e. be used to map kinematic constraints or instance styling (which are both not yet in scope of this document).

The further subtype of Occurrence (QuantifiedOccurrence) is used in the area of BoM systems (not in scope of this document).

### 7.1 Template “SingleOccurrence”

This is the normal case, where the usages of a component are only documented within their next higher assembly.

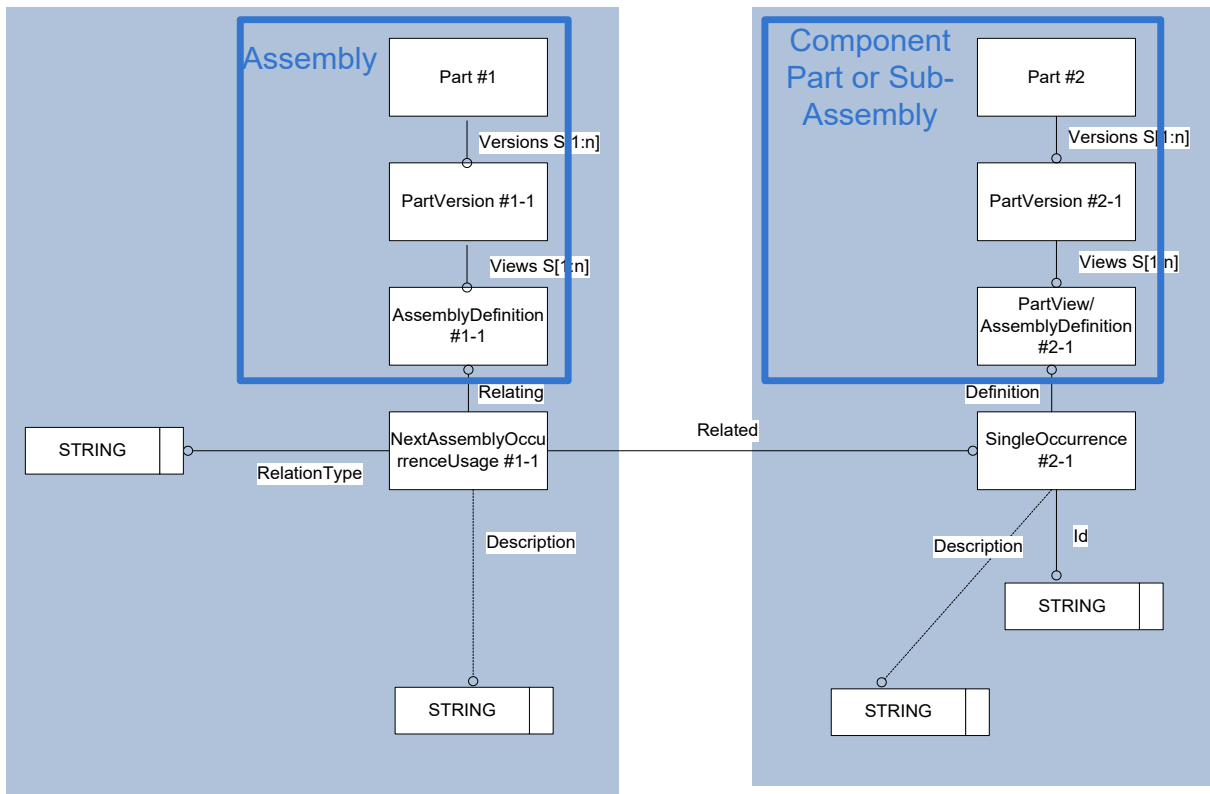


Figure 20: Template "SingleOccurrence"

### The Instance Model: STEP exchange file format (ISO10303 AP242 BO Model XML syntax)

```

<Part uid="p--0000000017086CB0">
  <Id>
    <Identifier uid="pid--0000000017086CB0--id1" id="as1" idRoleRef=",,rl--ii" idContextRef="o--000000178"/>
  </Id>
  ...
  <Versions>
    <PartVersion uid="pv--0000000017086CB0--id1">
      ...
      <Views>
        <PartView xsi:type="n0:AssemblyDefinition" uid="pvv--0000000017086CB0--id1">
          ...
          <ViewOccurrenceRelationship uid="pvvid--000000001E5A89F0--10" xsi:type="n0:NextAssemblyOccurrenceUsage">
            <Related uidRef="pi--000000001E5A89F0--10"/>
            <RelationType>
              <ClassString>next assembly occurrence</ClassString>
            </RelationType>
          </ViewOccurrenceRelationship>
          ...
        </PartView>
      </Views>
    </PartVersion>
  </Versions>
</Part>
    
```

```
<Part uid="p--000000001E5A89F0">
  <Id>
    <Identifier uid="pid--000000001E5A89F0--id2" id="plate" idRoleRef=„rl--
ii" idContextRef="o--000000178"/>
  </Id>
  ...
  <Versions>
    <PartVersion uid="pv--000000001E5A89F0--id2">
      ...
      <Views>
        <PartView uid="pvv--000000001E5A89F0--id2">
          ...
          <Occurrence xsi:type="n0:SingleOccurrence" uid="pi--
000000001E5A89F0--10">
            <Id id="plate.1"/>
          </Occurrence>
          ...
        </PartView>
      </Views>
    </PartVersion>
  </Versions>
</Part>
```

### ***Preprocessor Recommendations:***

The usage of SingleOccurrence is necessary to position each occurrence in 3D.

If a single level or multiple level assembly structure contains multiple usages of the same component part, a distinct instance of SingleOccurrence shall be created for each usage of this component. In some PDM systems, each instance of SingleOccurrence referenced via NextAssemblyOccurrenceUsage by an assembly part shall have a unique Id. All of them shall be defined under the PartView/AssemblyDefinition of the component part and they shall be referenced only once via NextAssemblyOccurrenceUsage.Related. Doing so, each usage can be described via its own properties.

QuantifiedOccurrence shall not be used in a CAx context. Where multiple occurrences are needed, use multiple instances of SingleOccurrence.

It is not recommended to use the supertypes of NextAssemblyOccurrenceUsage like ViewOccurrenceRelationship or AssemblyOccurrenceRelationship.

The Occurrence referenced by "Related" shall not belong to the part where the NextAssemblyOccurrenceUsage is defined, nor to any assembly that builds this part (so-called circular link in the product structure).

It is not recommended to instantiate SingleOccurrence without this Occurrence being referenced by a NextAssemblyOccurrenceUsage.

### ***Postprocessor Recommendations:***

If a SingleOccurrence is encountered which is not referenced by any NextAssemblyOccurrenceUsage, it shall be ignored.

Entity NextAssemblyOccurrenceUsage	Attribute type
ClassifiedAs	OPTIONAL SET[1:?] of Classification
Description	OPTIONAL DescriptorSelect
Id	OPTIONAL IdentifierSelect
MaterialIdentification	OPTIONAL SET[1:?] of MaterialIdentification
Related	Occurrence
RelationType	ClassSelect
ActivityAssignment	OPTIONAL SET[1:?] of ActivityAssignment
ApprovalAssignment	OPTIONAL SET[1:?] of ApprovalAssignment
DateAndPersonAssignment	OPTIONAL SET[1:?] of DateAndPersonAssignment
DateTimeAssignment	OPTIONAL SET[1:?] of DateTimeAssignment
DocumentAssignment	OPTIONAL SET[1:?] of DocumentAssignment
EffectivityAssignment	OPTIONAL SET[1:?] of EffectivityAssignment
EventAssignment	OPTIONAL SET[1:?] of EventAssignment
FrozenAssignment	OPTIONAL SET[1:?] of FrozenAssignment
InformationUsageRightAssignment	OPTIONAL SET[1:?] of InformationUsageRightAssignment
ModelPropertyAssignment	OPTIONAL SET[1:?] of ModelPropertyAssignment
OrganizationOrPersonInOrganizationAssignment	OPTIONAL SET[1:?] of OrganizationOrPersonInOrganizationAssignment
PropertyDefinitionAssignment	OPTIONAL SET[1:?] of PropertyDefinitionAssignment
PropertyValueAssignment	OPTIONAL SET[1:?] of PropertyValueAssignment
TimeIntervalAssignment	OPTIONAL SET[1:?] of TimeIntervalAssignment
Placement	OPTIONAL TransformationSelect
AssemblyOccurrenceRelationshipSubstitution	OPTIONAL SET[1:?] of AssemblyOccurrenceRelationshipSubstitution
RequirementAssignment	OPTIONAL SET[1:?] of RequirementAssignment
SecurityClassificationAssignment	OPTIONAL SET[1:?] of SecurityClassificationAssignment
ProductStructureKinematicPathAssociation (if Buzilla issue #6003 is accepted)	OPTIONAL SET[1:?] OF ProductStructureKinematicPathAssociation
ProductStructureLinkMotionAssociation (if Buzilla issue #6003 is accepted)	OPTIONAL SET[1:?] OF ProductStructureLinkMotionAssociation

Table 32: "NextAssemblyOccurrenceUsage" Attributes



## Attribute recommendations

- **Description:** the text or the set of texts that provide further information about the Assembly structure link. The value of this attribute need not be specified. Use "Description" template.
- **Related:** Reference to a SingleOccurrence of the component part built into the assembly part.
- **RelationType:** the meaning of the relationship. Use ClassString type. Mandatory value: 'next assembly occurrence'.
- **ActivityAssignment:** the Activities associated to the SingleOccurrence. The value of this attribute need not be specified. Use "Activity" template (see Recommended Practices for AP242 XML Change Management).
- **EffectivityAssignment:** to assign (optionally) one or multiple Effectivities to the usage of the Part referenced by NextAssemblyOccurrenceUsage.Related. Use the "EffectivityAssignment" template (see Recommended Practices for AP242 BO Model Configuration Management for details).
- **PropertyValueAssignment:** adds the value of a property to the NextAssemblyOccurrenceUsage. Use "PropertyAssignment" template (see 6.2)
- **Placement:** specifies the transformation information which is used to locate and orient the constituent in the coordinate space of the AssemblyDefinition. Placement is a reference to a CartesianTransformation, GeometricRepresentationRelationshipWithPlacementTransformation, GeometricRepresentationRelationshipWithCartesianTransformation or GeometricRepresentationRelationshipWithSameCoordinateSpace. For more details, refer to section 7.
- **AssemblyOccurrenceRelationshipSubstitution:** to assign (optionally) that this NextAssemblyOccurrenceUsage may be substituted for another NextAssemblyOccurrenceUsage. For more details, refer to section 7.5.2.
- **ProductStructureKinematicPathAssociation:** to assign (optionally) one or multiple Kinematic Motions to the Part referenced by. NextAssemblyOccurrenceUsage.Related. Use the "ProductStructureKinematicPathAssociation" template (see Recommended Practices for AP242 BO Model XML Kinematics for details).
- **ProductStructureLinkMotionAssociation:** to assign (optionally) one or multiple Kinematic Motions to the Part referenced by. NextAssemblyOccurrenceUsage.Related. Use the "ProductStructureLinkMotionAssociation" template (see Recommended Practices for AP242 BO Model XML Kinematics for details).
- Other attributes than these are not covered by these Recommended Practices; their use is discouraged as it would depend on mutual agreements between data exchange partners.

Entity SingleOccurrence	Attribute type
ClassifiedAs	OPTIONAL SET[1:?] of Classification
DefiningGeometry	OPTIONAL GeometricModel
Description	OPTIONAL DescriptorSelect
Id	IdentifierSelect
KinematicLinkToOccurrenceAssociation	OPTIONAL SET[1:?] of KinematicLinkToOccurrenceAssociation
MaterialIdentification	OPTIONAL SET[1:?] of MaterialIdentification
ShapeDependentProperty	OPTIONAL SET[1:?] of ShapeDependentProperty
ShapeElement	OPTIONAL SET[1:?] of ShapeElement
SpecifiedOccurrence	OPTIONAL SET[1:?] of SpecifiedOccurrence
SurfaceCondition	OPTIONAL SET[1:?] of SurfaceCondition
ActivityAssignment	OPTIONAL SET[1:?] of ActivityAssignment
ApprovalAssignment	OPTIONAL SET[1:?] of ApprovalAssignment
BreakdownVersionAssignment	OPTIONAL SET[1:?] of BreakdownVersionAssignment
CertificationAssignment	OPTIONAL SET[1:?] of CertificationAssignment
DateAndPersonAssignment	OPTIONAL SET[1:?] of DateAndPersonAssignment
DateTimeAssignment	OPTIONAL SET[1:?] of DateTimeAssignment
DocumentAssignment	OPTIONAL SET[1:?] of DocumentAssignment
EffectivityAssignment	OPTIONAL SET[1:?] of EffectivityAssignment
EventAssignment	OPTIONAL SET[1:?] of EventAssignment
FrozenAssignment	OPTIONAL SET[1:?] of FrozenAssignment
InformationUsageRightAssignment	OPTIONAL SET[1:?] of InformationUsageRightAssignment
ModelPropertyAssignment	OPTIONAL SET[1:?] of ModelPropertyAssignment
OccurrenceRelationship	OPTIONAL SET[1:?] of OccurrenceRelationship
OrganizationOrPersonInOrganizationAssignment	OPTIONAL SET[1:?] of OrganizationOrPersonInOrganizationAssignment
ProjectAssignment	OPTIONAL SET[1:?] of ProjectAssignment
PropertyDefinitionAssignment	OPTIONAL SET[1:?] of PropertyDefinitionAssignment
PropertyValueAssignment	OPTIONAL SET[1:?] of PropertyValueAssignment
SuppliedObjectRelationship	OPTIONAL SET[1:?] of SuppliedObjectRelationship
TimeIntervalAssignment	OPTIONAL SET[1:?] of TimeIntervalAssignment

Table 33: "SingleOccurrence" Attributes

## **Attribute recommendations**

- **DefiningGeometry:** the **GeometricModel** that contains the shape information. The value of this attribute shall not be specified, except in case of a flexible part where the geometry of the part deviates from the one defined on PartView.DefiningGeometry level for this particular occurrence.
- **Description:** the text or the set of texts that provides further information about the SingleOccurrence. The value of this attribute need not be specified. Use “Description” template.
- **Id:** stores the Identifier for the SingleOccurrence (in some PDM systems, it shall be unique over all Occurrences directly referenced via NextAssemblyOccurrenceUsage by an assembly part). Use IdentifierString type.
- **KinematicLinkToOccurrenceAssociation:** the KinematicLinks associated to this occurrence in mechanisms (see Recommended Practices for AP242 BO Model XML Kinematics for details)
- **SpecifiedOccurrence:** the specific occurrences of this occurrence in a product structure. Use SpecifiedOccurrence template in 7.2.
- Other attributes than these are not covered by these Recommended Practices; their use is discouraged as it would depend on mutual agreements between data exchange partners.

### **Postprocessor Recommendations:**

- In case the target PDM requires that the Occurrence.Id is unique over all Occurrences directly referenced via NextAssemblyOccurrenceUsage by an assembly part, the Occurrence.Id shall be made unique, for example by adding a unique suffix like `_1`, `_2`, `_3`, ...

## **7.2 Template “SpecifiedOccurrence”**

In order to distinguish a specific occurrence of a component in an assembly of more than two hierarchical levels, the SpecifiedOccurrence entity is used additionally to the SingleOccurrence mentioned above.

For example, a Train assembly contains many wagons. The Wagon again contains a sub-assembly Bogie, which again contains an Axle, etc... The requirement is to individually identify the front axle of the second bogie of the fifth wagon of the train, for example.

This is achieved by having a hierarchy of SpecifiedOccurrences.

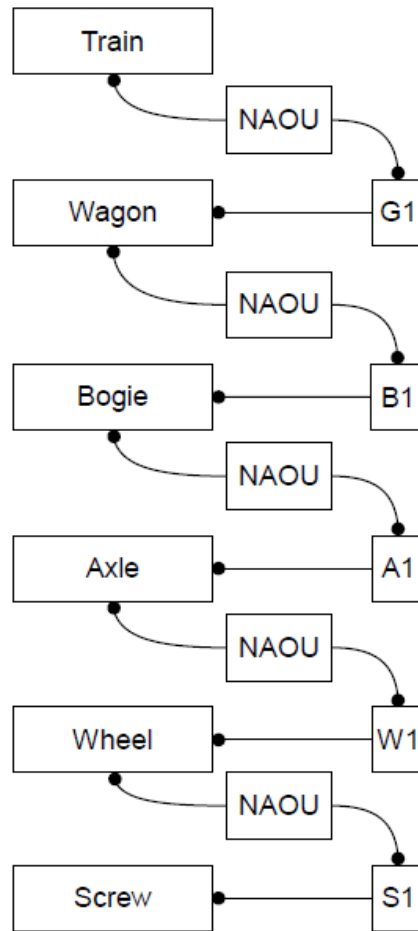


Figure 21: Example structure for multi-level assembly

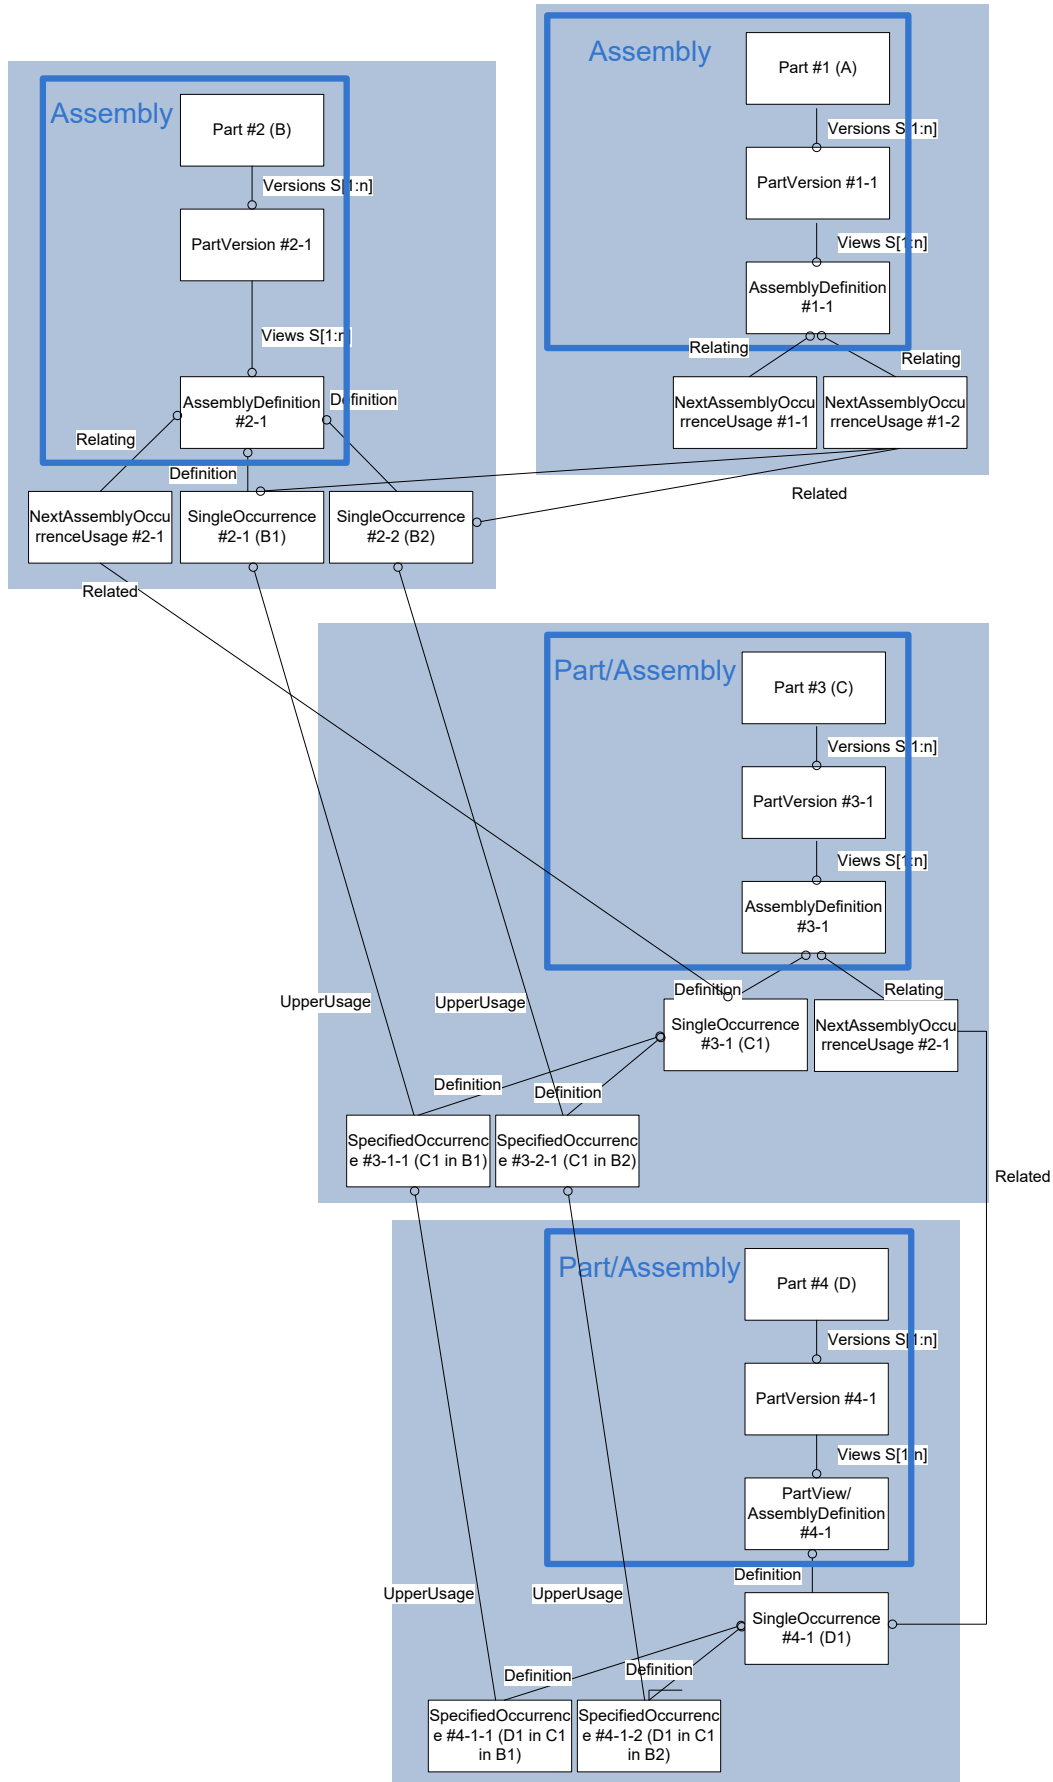


Figure 22: Template "SpecifiedOccurrence"

**Note:** due to the complexity of the picture, the attributes of SpecifiedOccurrence Description (reference the “Description” template) and “Id” (as IdentifierString) are not mentioned here. The same applies for the attributes of NextAssemblyOccurrenceUsage: Description (“Description template”) and RelationType (ClassString).

Through the chain of SpecifiedOccurrences, it is possible to compute the 3D position of each occurrence.

### The Instance Model: STEP exchange file format (ISO10303 AP242 BO Model XML syntax)

Entity SpecifiedOccurrence	Attribute type
ClassifiedAs	OPTIONAL SET[1:?] of Classification
DefiningGeometry	OPTIONAL GeometricModel
Description	OPTIONAL DescriptorSelect
Id	IdentifierSelect
KinematicLinkToOccurrenceAssociation	OPTIONAL SET[1:?] of KinematicLinkToOccurrenceAssociation
MaterialIdentification	OPTIONAL SET[1:?] of MaterialIdentification
ShapeDependentProperty	OPTIONAL SET[1:?] of ShapeDependentProperty
ShapeElement	OPTIONAL SET[1:?] of ShapeElement
SpecifiedOccurrence	OPTIONAL SET[1:?] of SpecifiedOccurrence
SurfaceCondition	OPTIONAL SET[1:?] of SurfaceCondition
ActivityAssignment	OPTIONAL SET[1:?] of ActivityAssignment
ApprovalAssignment	OPTIONAL SET[1:?] of ApprovalAssignment
BreakdownVersionAssignment	OPTIONAL SET[1:?] of BreakdownVersionAssignment
CertificationAssignment	OPTIONAL SET[1:?] of CertificationAssignment
DateAndPersonAssignment	OPTIONAL SET[1:?] of DateAndPersonAssignment
DateTimeAssignment	OPTIONAL SET[1:?] of DateTimeAssignment
DocumentAssignment	OPTIONAL SET[1:?] of DocumentAssignment
EffectivityAssignment	OPTIONAL SET[1:?] of EffectivityAssignment
EventAssignment	OPTIONAL SET[1:?] of EventAssignment
FrozenAssignment	OPTIONAL SET[1:?] of FrozenAssignment
InformationUsageRightAssignment	OPTIONAL SET[1:?] of InformationUsageRightAssignment
ModelPropertyAssignment	OPTIONAL SET[1:?] of ModelPropertyAssignment
OccurrenceRelationship	OPTIONAL SET[1:?] of OccurrenceRelationship
OrganizationOrPersonInOrganization-Assignment	OPTIONAL SET[1:?] of OrganizationOrPersonInOrganizationAssignment
ProjectAssignment	OPTIONAL SET[1:?] of ProjectAssignment
PropertyDefinitionAssignment	OPTIONAL SET[1:?] of PropertyDefinitionAssignment

Entity SpecifiedOccurrence	Attribute type
PropertyValueAssignment	OPTIONAL SET[1:?] of PropertyValueAssignment
SuppliedObjectRelationship	OPTIONAL SET[1:?] of SuppliedObjectRelationship
TimeIntervalAssignment	OPTIONAL SET[1:?] of TimeIntervalAssignment
UpperUsage	Occurrence

Table 34: "SpecifiedOccurrence" Attributes

#### Attribute recommendations

- **DefiningGeometry:** the GeometricModel that contains the shape information. See 6.1 for details of instantiating a GeometricModel and linking it to a PartView. The value of this attribute need not be specified, except if the geometry of the related part is overloaded (see below).
- **Description:** the text or the set of texts that provides further information about the SpecifiedOccurrence. The value of this attribute need not be specified. Use "Description" template.
- **Id:** stores the Identifier for the SpecifiedOccurrence (in some PDM systems, shall be unique over all Occurrences defined under this PartView). Use IdentifierString type.
- **KinematicLinkToOccurrenceAssociation:** the KinematicLinks associated to this occurrence in mechanisms (see Recommended Practices for AP242 BO Model XML Kinematics for details)
- **PropertyValueAssignment:** adds the value of a property to the SpecifiedOccurrence. Use "PropertyAssignment" template (see 6.2)
- **UpperUsage:** the [Occurrence](#) in which the related instance is used. This [Occurrence](#) shall be the immediate upper level instance or another SpecifiedOccurrence
- Other attributes than these are not covered by these Recommended Practices; their use is discouraged as it would depend on mutual agreements between data exchange partners.

#### Preprocessor Recommendations:

- To overload the position of the part (for example if the position depends on the load to be supported by the product), a dedicated instance of NextAssemblyOccurrenceUsage shall contain the deviating positioning (Placement) and reference via 'Related' an instance of SpecifiedOccurrence (instead of SingleOccurrence).
- To overload the geometry of the part, depending on its SpecifiedOccurrence, the deviating geometry shall be referenced via SpecifiedOccurrence.DefiningGeometry.
- It is not mandatory to instantiate all intermediate SpecifiedOccurrences if not needed:

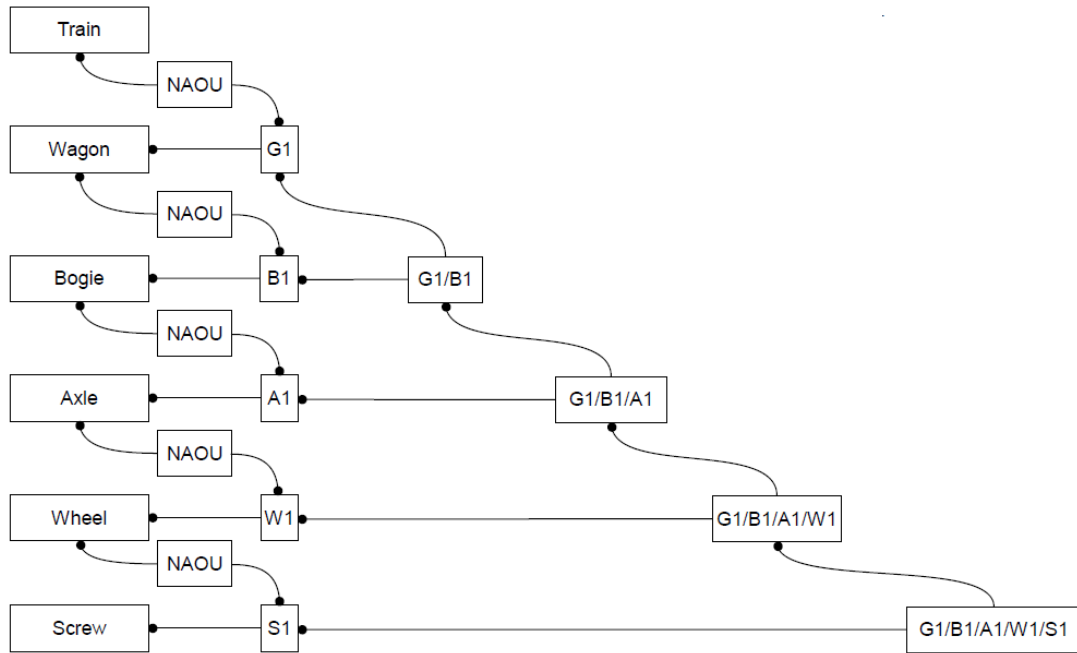


Figure 23: Instantiation without the intermediate SpecifiedOccurrences

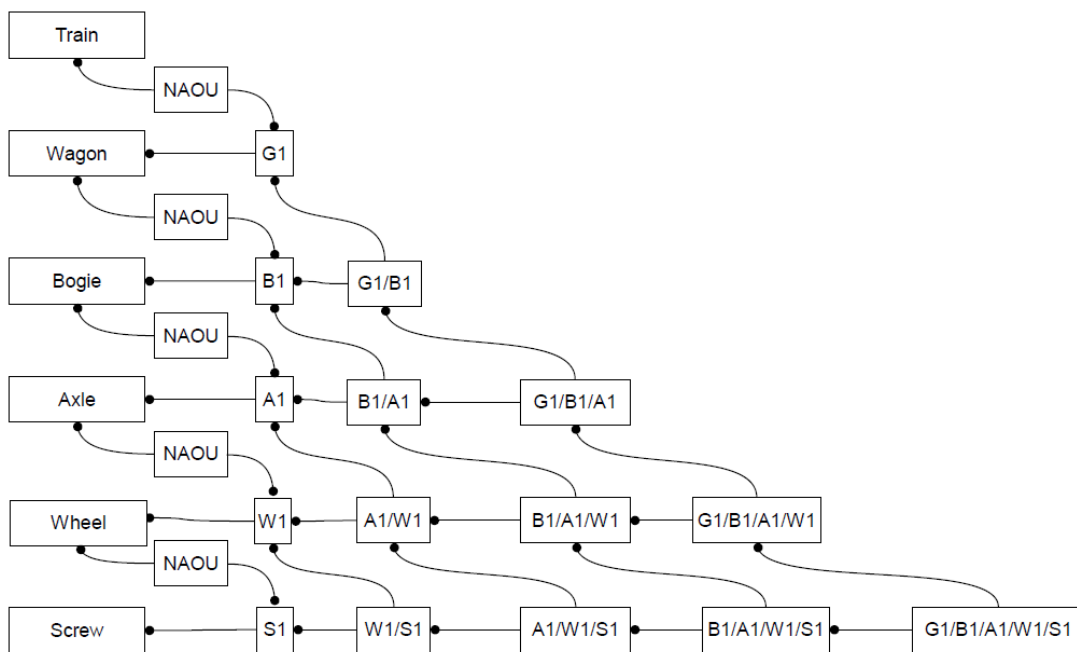


Figure 24: Instantiation with all the intermediate SpecifiedOccurrences

Instantiating all intermediate SpecifiedOccurrences provides a clear containment along the “Definition” attribute:

- S1 inherits all attributes from Screw
- W1/S1 inherits from S1
- A1/W1/S1 inherits from W1/S1
- B1/A1/W1/S1 inherits from A1/W1/S1
- G1/B1/A1/W1/S1 inherits from B1/A1/W1/S1



### **Postprocessor Recommendations:**

- Instances of NextAssemblyOccurrenceUsage that reference a SpecifiedOccurrence via 'Related' shall only be interpreted if the target system supports the overloading of the position of parts
- SpecifiedOccurrence.DefiningGeometry shall only be interpreted if the target system supports the overloading of the geometry.

### **7.3 Full / Simplified Positioning Representation**

The scope of this section corresponds to section 3.4 of the PDM Schema Usage Guide V4.3

In addition to the usual (geometrical) way of mapping the 3D positioning within an assembly structure, a more compact (especially in XML) and simple way has been defined in AP242. This section describes all possible ways.

#### **Preprocessor Recommendations:**

As long as no critical precision issues occur (especially caused by the multiplication of several relative positioning matrices containing large numbers in deep assembly structures), either relative or absolute 3D positioning can be used.

Since large numbers cause computers to truncate decimal digits, the depth of such assembly structure shall be limited in the case of relative positioning, or absolute positioning should be used. In the latter case, all intermediate assembly nodes between the top node and the assemblies/components associated to an absolute positioning should be positioned via an identity matrix, or share the same coordinate space.

Absolute positioning of multiple usages of components requires the use of SpecifiedOccurrence (see previous section) and is therefore not recommended.

The use of mirroring in the 3D transformation from a component part in an assembly part is not allowed.

The vectors within the RotationMatrix of a CartesianTransformation and the Axis/RefDirection of an AxisPlacement shall be orthogonal to each other.

**Note:** Transformation matrices exchanged using this BO model are not guaranteed to be orthogonal, since compared to the definition of axis2\_placement\_3d in Part 42, the definition of AxisPlacement in the BO Model is missing one step in the calculation intended to ensure the orthogonality of axis and refDirection. Hence, special attention is needed to define them as orthogonal from the beginning. Otherwise, in the case of multi-level assembly the concatenation of the transformation matrices may result in inconsistent or incorrect results between exchange partners

The simplified positioning representation is recommended whenever the assembly nodes have no geometry. It is a shortcut to avoid instantiating GeometricModel if there is none. If there is a GeometricModel, it has to be referenced by the RepresentationRelationship and to point to a GeometricCoordinateSpace => the simplified positioning representation is not usable.

The implicit or explicit representation is recommended whenever the assembly nodes have geometry, since from a pure CAD point of view, each Geometry has his own GeometricCoordinateSpace.

This recommendation applies independently from the fact that nested or monolithic mapping is used (see section 9.2), since the reference to nested nodes is not geometry but AP242 XML. The only point is: does the assembly node own a geometry file or not.

### 7.3.1 Template “Simplified Positioning Representation”

The only instance needed here is a CartesianTransformation.

#### ***Preprocessor Recommendations:***

- Unlike for the full positioning representations, the use of a GeometricCoordinateSpace is not necessary here => it is recommended to embed the CartesianTransformation directly in the NextAssemblyOccurrenceUsage.Placement.
- Since this mapping does not support the explicit mapping of a unit (for the elements of the translation vector), a DefaultUnit shall be defined in ExchangeContext and all translation vectors shall be given according to this unit.

#### ***Postprocessor Recommendations:***

- Since this is allowed by the BO Model, both mappings of the CartesianTransformation (embedded directly in the NextAssemblyOccurrenceUsage.Placement, or referenced as subtype of RepresentationItem within a GeometricCoordinateSpace) shall be supported

### **The Instance Model: STEP exchange file format (ISO10303 AP242 BO Model XML syntax)**

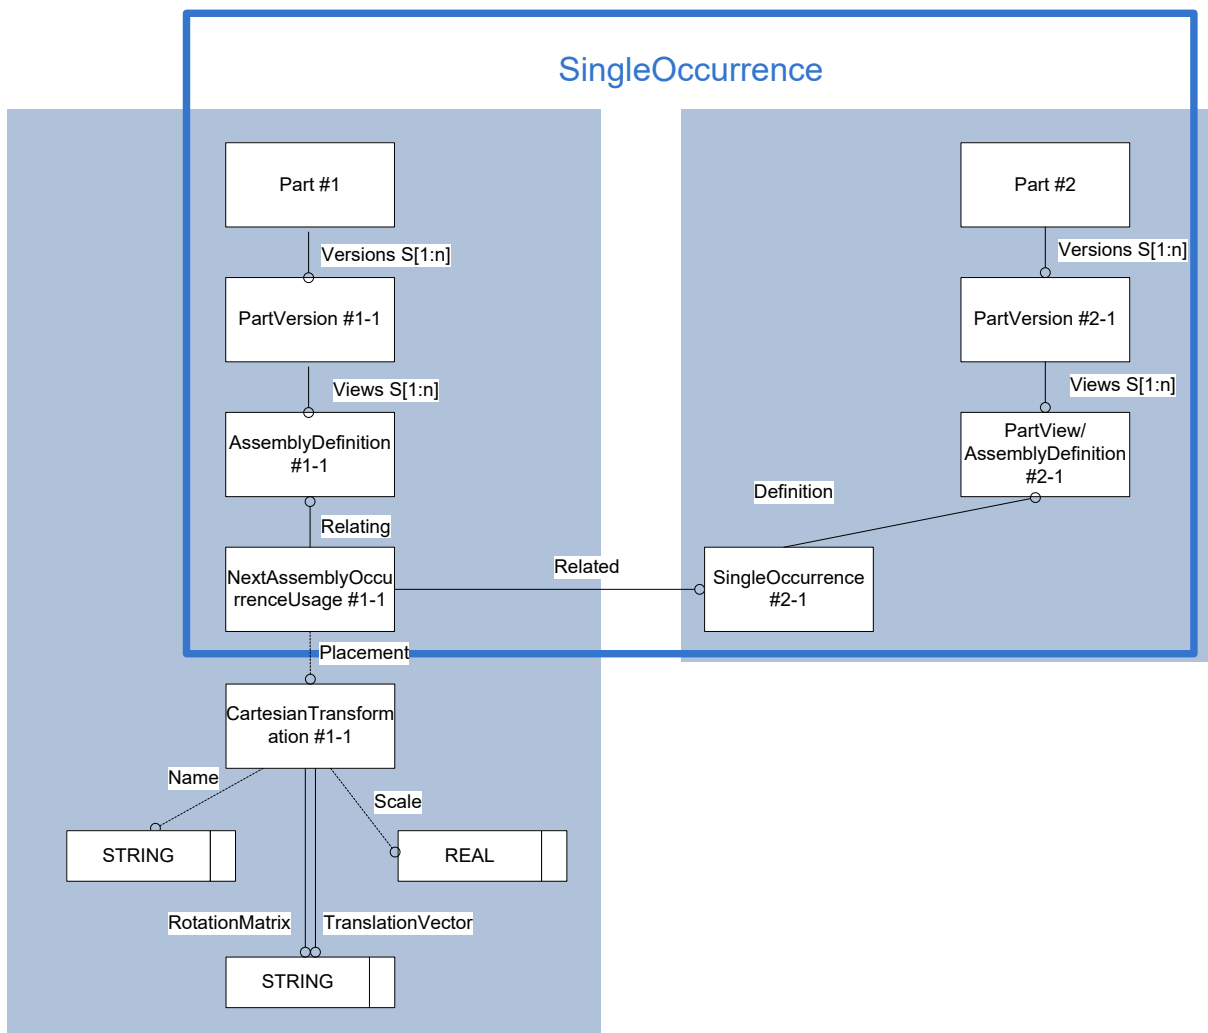


Figure 25: Template "Simplified Positioning Representation"

```
<Part uid="p--0000000017085F00">
  <Id>
    <Identifier uid="pid--0000000017085F00--id3" id="bracket_asm" idRoleRef="rl--ii" idContextRef="o--000000178"/>
  </Id>
  ...
  <Versions>
    <PartVersion uid="pv--0000000017085F00--id3">
  ...
    <Views>
      <PartView xsi:type="n0:AssemblyDefinition" uid="pvv--0000000017085F00--id3">
  ...
        <ViewOccurrenceRelationship uid="pvvid--000000001E6E14B0--14"
        xsi:type="n0:NextAssemblyOccurrenceUsage">
          <Related uidRef="pi--000000001E6E14B0--14"/>
          <RelationType>
            <ClassString>next assembly occurrence</ClassString>
          </RelationType>
          <Placement>
            <CartesianTransformation uid="cto--000000001E6E14B0--14">
```

```

    <RotationMatrix>2.83808309622E-16 -1.48711849984E-5
0.999999999889 7.14623103897E-14 -0.999999999889 -1.48711849984E-5 1.0
7.146231460233355E-14 -2.82745580352E-16</RotationMatrix>
    <TranslationVector>7451.5038 127.065 -
443.85</TranslationVector>
    </CartesianTransformation>
  </Placement>
</ViewOccurrenceRelationship>
...
</PartView>
</Views>
</PartVersion>
</Versions>
</Part>

```

Entity CartesianTransformation	Attribute type
External	OPTIONAL ExternalItem;
Name	OPTIONAL DescriptorSelect
RotationMatrix	String
Scale	Real
TranslationVector	String

Table 35: "CartesianTransformation" Attributes

#### Attribute recommendations

- **Name:** the words or set of words by which the CartesianTransformation is known. The value of this attribute need not be specified. Use "Description" template.
- **RotationMatrix:** 3x3 Matrix with the values: xx xy xz yx yy yz zx zy zz
  - xx xy xz represent the X axis direction of the transformation target.
  - yx yy yz represent the Y axis direction of the transformation target.
  - zx zy zz represent the Z axis direction of the transformation target.
- **Scale:** According to the AP242 ISO specification, the scale factor shall be omitted or set to 1.0.
- **TranslationVector:** 3-dimensional vector with the following values: x y z
- Other attributes than these are not covered by these Recommended Practices; their use is discouraged as it would depend on mutual agreements between data exchange partners.

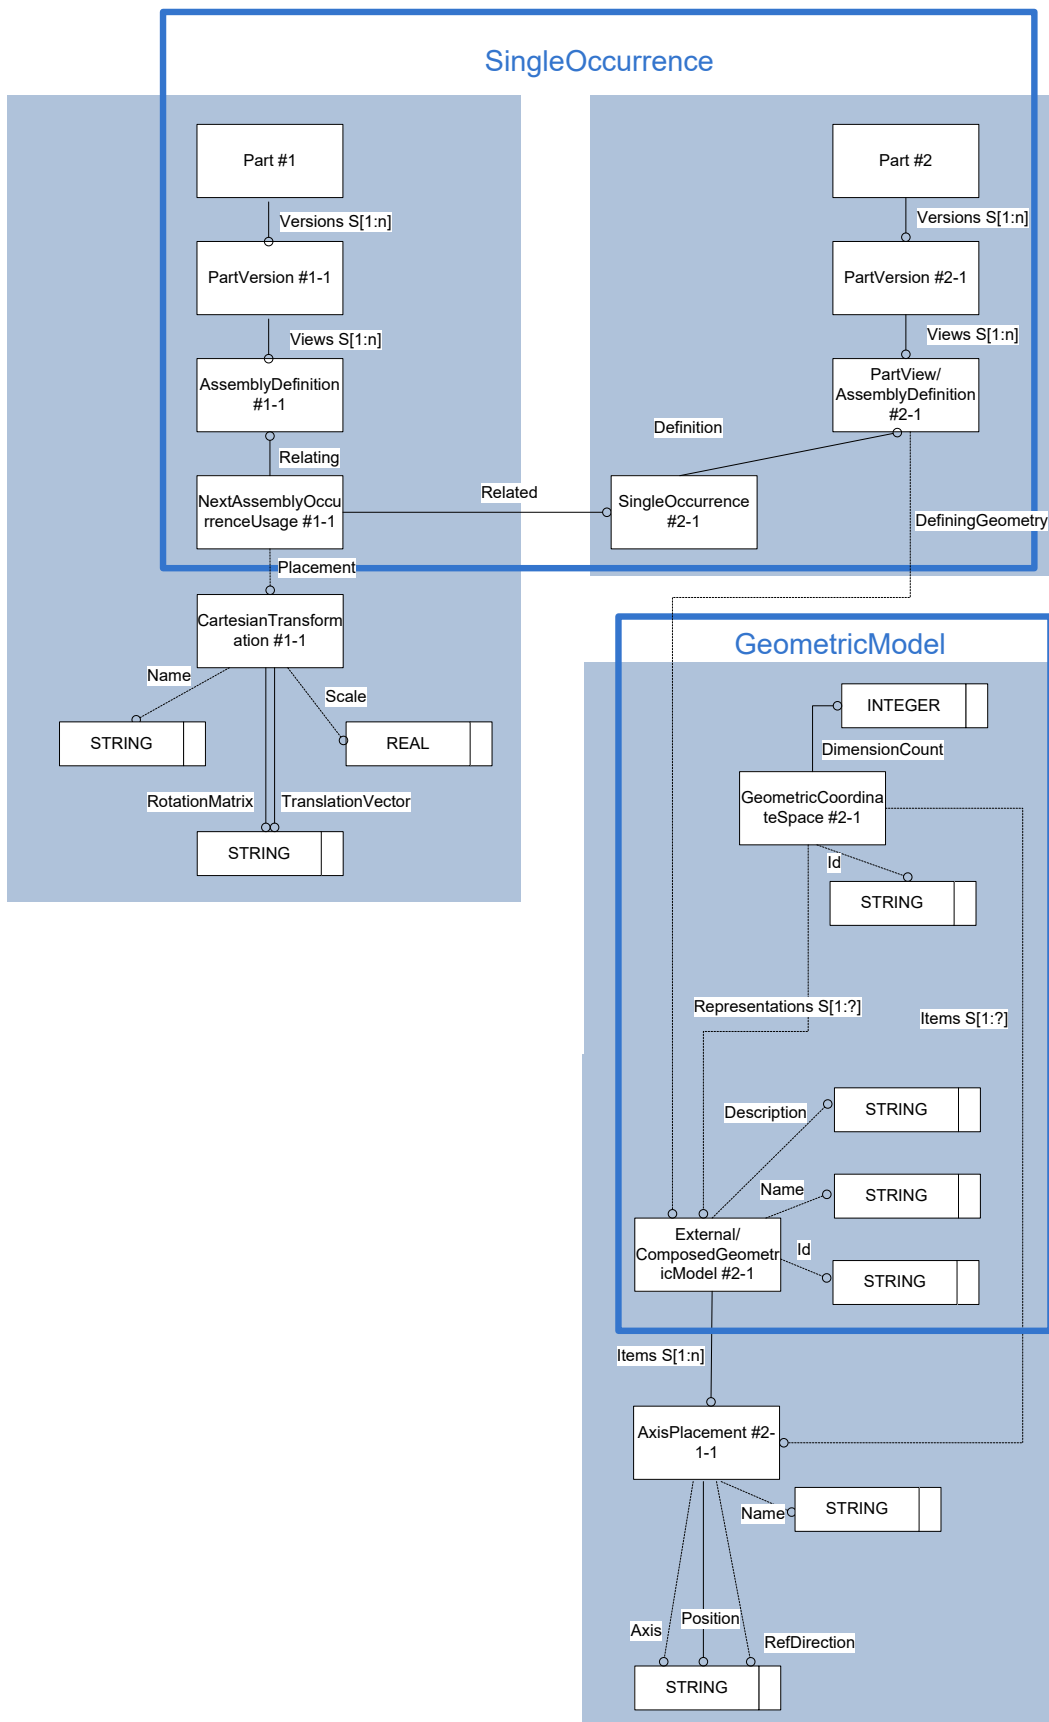


Figure 26: Instantiation example if Part #2 has geometry

### 7.3.2 Full Positioning Representations

In all these mapping alternatives, the assembly and the component node are associated to a subtype of GeometricModel and the 3D Positioning information is mapped in a subtype of RepresentationRelationship that references both GeometricModels.

Here some common recommendations and entities applying to all mapping alternatives:

#### **Preprocessor Recommendations:**

The GeometricModel associated to the Assembly node shall be of kind ComposedGeometricModel, while

The GeometricModel associated to the Component node shall be of kind:

- ExternalGeometricModel if it is a simple part and has its own geometry, defined in a digital file (see section File Reference)
- ComposedGeometricModel if it is an assembly node

The use of GeometricModel itself (without a subtype) as well as the use of further subtypes of GeometricModel (i.e. TransformedGeometricModel) is not recommended.

The use of the subtypes of ExternalGeometricModel is optional (like in the EXPRESS schema, since ExternalGeometricModel is not an ABSTRACT SUPERTYPE), and shall be interpreted purely as 'for information purpose only' by the postprocessor. There are several reasons for this:

- Many file formats allow for the combination of different geometric representations of the same model, e.g. precise B-Rep and tessellated, or solid and surface model, within the same file.  
→ the ONEOF constraint defined in the EXPRESS schema between the subtypes doesn't apply all the time
- Some of the subtypes are not supported by the converters (for example External-CurveSweptSolidShapeRepresentation).
- Since currently most converters do not evaluate the Creation\_Property, Format\_Property, File\_Type\_Property during import, but rather try to load the file  
→ it is likely they will also not evaluate the subtypes of ExternalGeometricModel
- It may be quite an effort to add this to the converters, with a rather low added value

In case of a relative 3D positioning, it is not recommended to reuse the same instance of GeometricCoordinateSpace for both geometric models, since each of them has its own coordinate space.

If necessary an adjustment to refDirection has to be made to maintain orthogonality to the axis direction. If axis or refDirection are omitted, these directions are taken from the geometric coordinate system.

Although GeometricModel is defined as XML RootObject, it should be always associated to one and only one PartView or Occurrence via DefinedGeometry.

If an ExternalGeometricModel is defined for an Occurrence (flexible part), this ExternalGeometricModel shall be involved in the GeometricRepresentationRelationshipWithPlacementTransformation or the GeometricRepresentationRelationshipWithCartesianTransformation that involves this Occurrence, and not the ExternalGeometricModel defined via PartView.DefiningGeometry.

The GeometricModel referenced by "Related" shall not belong to the part where the GeometricModelRelationship is defined, nor to any assembly that builds this part (so-called cycle in the product structure).

### ***Postprocessor Recommendations:***

To derive the Y vector from the Axis (Z) and RefDirection (X) of an AxisPlacement, please refer to the Annex D (Conversion from Implicit to Explicit Transformation Information) taken over from the PDM Usage Guide.

The subtypes of ExternalGeometricModel shall be interpreted purely as 'for information purpose only'. Do not rely on them for processing the file and do not stop processing in case the given subtype is not supported (the file shall be loaded anyway and an error produced only if it couldn't be processed).

#### **7.3.2.1 Implicit Transformation**

In this case, the RepresentationRelationship is of kind GeometricRepresentationRelationship-WithPlacementTransformation.

### ***Preprocessor Recommendations:***

- The AxisPlacement of the Component (Origin) shall contain '0 0 0' for Position and no value. for Axis and RefDirection.
- The use of further subtypes of RepresentationItem (apart of AxisPlacement) is not recommended.
- In case of relative 3D positioning, each GeometricModel should reference its own instance of GeometricCartesianSpace.

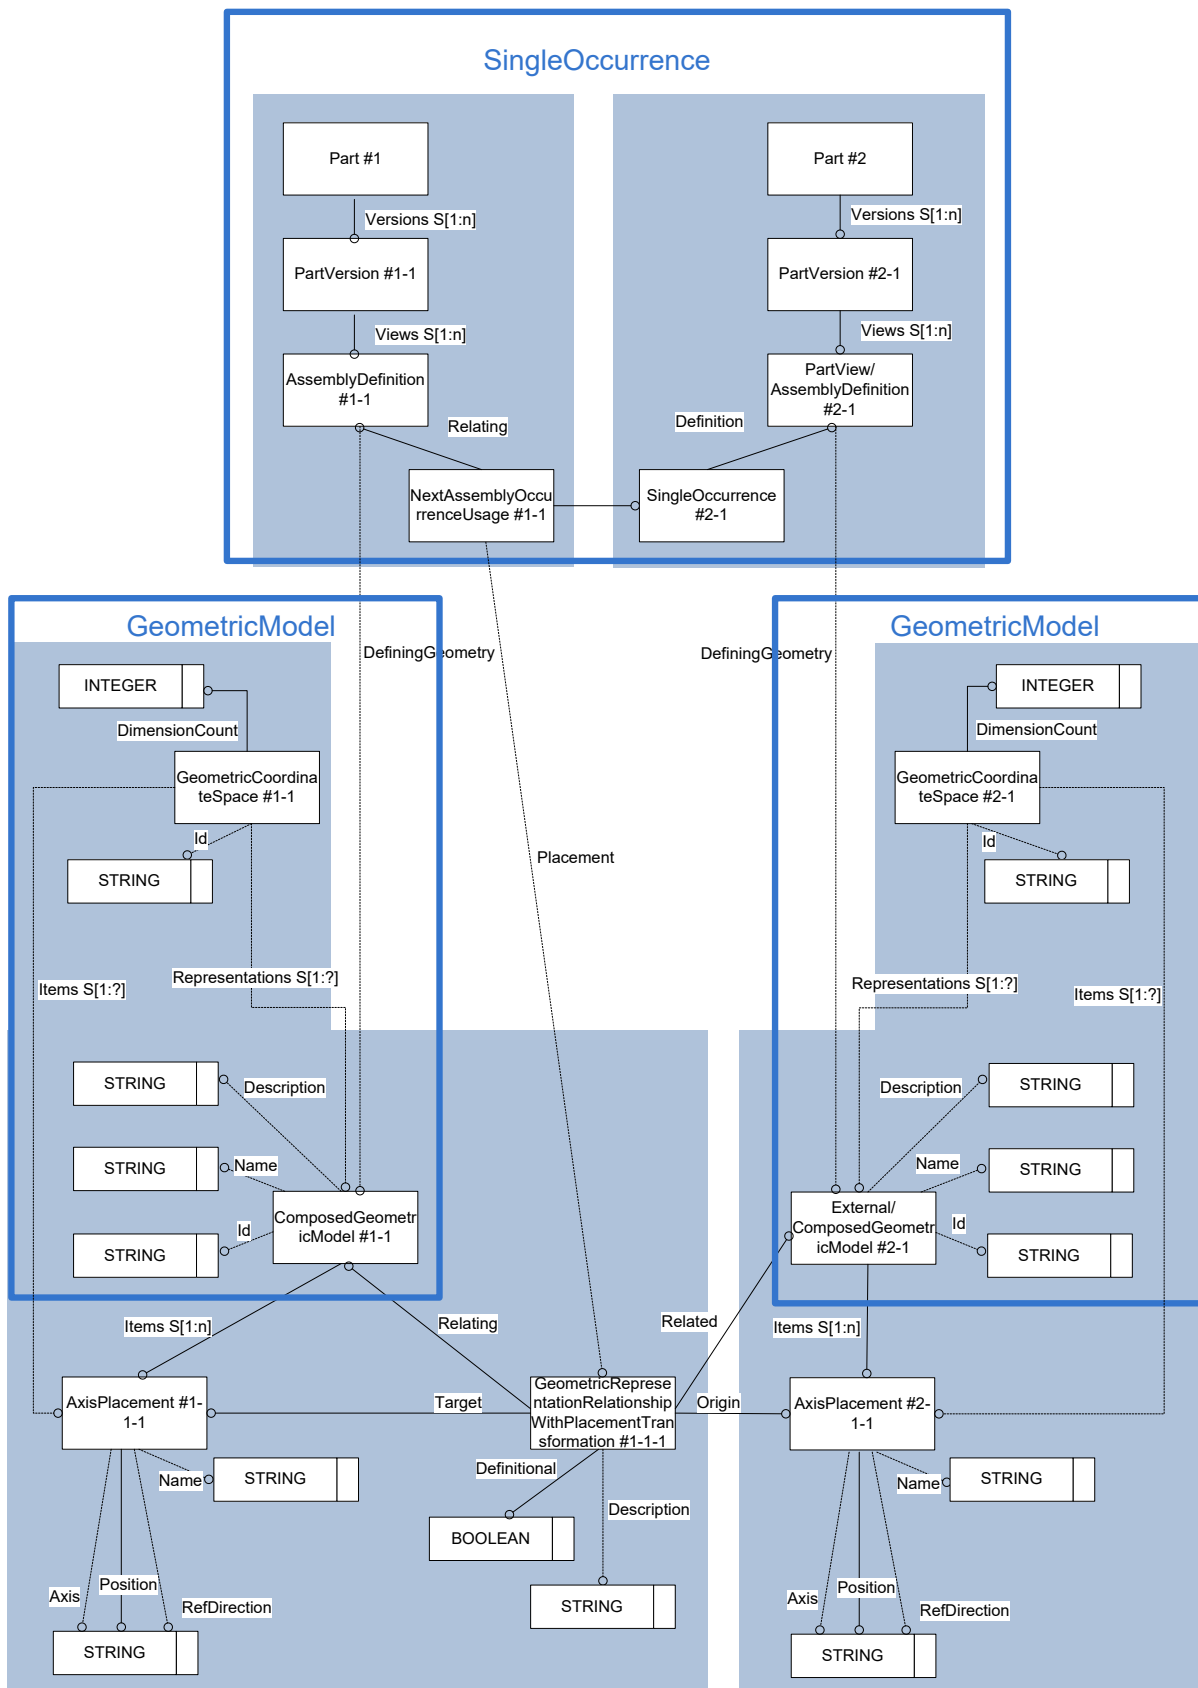


Figure 27: Full Positioning Representation with Implicit Transformation



## The Instance Model: STEP exchange file format (ISO10303 AP242 BO Model XML syntax)

```
<Part uid="p--0000000020AB6290">
  <Id>
    <Identifier uid="pid--0000000020AB6290--id5" id="nut and bolt"
idRoleRef=",,rl--ii" idContextRef="o--000000178"/>
  </Id>
  ...
  <Versions>
    <PartVersion uid="pv--0000000020AB6290--id5">
  ...
    <Views>
      <PartView xsi:type="n0:AssemblyDefinition" uid="pvv--
0000000020AB6290--id5">
  ...
        <ViewOccurrenceRelationship uid="pvvid--000000001AA415B0--18"
xsi:type="n0:NextAssemblyOccurrenceUsage">
          <Related uidRef="pi--000000001AA415B0--18"/>
          <RelationType>
            <ClassString>next assembly occurrence</ClassString>
          </RelationType>
          <Placement>
            <RepresentationRelationship uidRef="ctrafo--0000000013DF75A0-
-18"/>
          </Placement>
        </ViewOccurrenceRelationship>
        <ViewOccurrenceRelationship uid="pvvid--000000001AA41A00--19"
xsi:type="n0:NextAssemblyOccurrenceUsage">
          <Related uidRef="pi--000000001AA41A00--19"/>
          <RelationType>
            <ClassString>next assembly occurrence</ClassString>
          </RelationType>
          <Placement>
            <RepresentationRelationship uidRef="ctrafo--0000000013DF75A0-
-19"/>
          </Placement>
        </ViewOccurrenceRelationship>
      </PartView>
    </Views>
  </PartVersion>
</Versions>
</Part>
<RepresentationContext uid="ccs--origin-nut-and-bolt" xsi:type="n0:Ge-
ometricCoordinateSpace">
  <Id id="/NULL"/>
  <Representations>
    <Representation uid="egm--0000000020AB6290"
xsi:type="n0:ComposedGeometricModel">
      <Id id="nut and bolt"/>
      <Items>
        <RepresentationItem uidRef="repi--000000001AA41A00--18--2"/>
        <RepresentationItem uidRef="repi--000000001AA41A00--19--2"/>
      </Items>
    </Representation>
  </Representations>
</RepresentationContext>
```

```
<RepresentationRelationship uid="ctrafo--0000000013DF75A0--18"
xsi:type="n0:GeometricRepresentationRelationshipWithPlacementTransformation
">
  <Definitional>true</Definitional>
  <Related uidRef="egm--000000001AA415B0"/>
  <Origin uidRef="repi--000000001AA415B0--18"/>
  <Target uidRef="repi--000000001AA41A00--18--2"/>
</RepresentationRelationship>
<RepresentationRelationship uid="ctrafo--0000000013DF75A0--19"
xsi:type="n0:GeometricRepresentationRelationshipWithPlacementTransformation
">
  <Definitional>true</Definitional>
  <Related uidRef="egm--000000001AA41A00"/>
  <Origin uidRef="repi--000000001AA41A00--19"/>
  <Target uidRef="repi--000000001AA41A00--19--2"/>
</RepresentationRelationship>
</Representation>
</Representations>
<Items>
  <RepresentationItem uid="repi--000000001AA41A00--18--2"
xsi:type="n0:AxisPlacement">
  <Axis>0.999999999889,-1.48711849984E-005,-2.82745580352E-016</Axis>
  <Position>7451.5038,127.065,-443.85</Position>
  <RefDirection>2.83808309622E-016,7.14623103897E-014,1.</RefDirection>
</RepresentationItem>
  <RepresentationItem uid="repi--000000001AA41A00--19--2"
xsi:type="n0:AxisPlacement">
  <Axis>1.000000 0.000000 0.000000</Axis>
  <Position>-33.000000 0.000000 0.000000</Position>
  <RefDirection>0.0 0.0 0.0</RefDirection>
</RepresentationItem>
</Items>
<DimensionCount>3</DimensionCount>
</RepresentationContext>
<Part uid="p--000000001AA415B0">
  <Id>
    <Identifier uid="pid--000000001AA415B0--id6" id="bolt" idRoleRef=",,rl--
ii" idContextRef="o--000000178"/>
  </Id>
  ...
  <Versions>
    <PartVersion uid="pv--000000001AA415B0--id6">
  ...
    <Views>
      <PartView uid="pvv--000000001AA415B0--id6">
        <DefiningGeometry uidRef="egm--000000001AA415B0"/>
  ...
        <Occurrence xsi:type="n0:SingleOccurrence" uid="pi--
000000001AA415B0--18">
          <Id id="bolt.1"/>
        </Occurrence>
  ...
      </PartView>
```

```
</Views>
</PartVersion>
</Versions>
</Part>

<RepresentationContext uid="ccs--origin-bolt" xsi:type="n0:GeometricCoordinateSpace">
  <Id id="/NULL"/>
  <Representations>
    <Representation uid="egm--000000001AA415B0"
xsi:type="n0:ExternalGeometricModel">
      <Id id="bolt.stp"/>
      <Items>
        <RepresentationItem uidRef="repi--000000001AA415B0--18"/>
      </Items>
      <ExternalFile uidRef="df--000000001AA415B0"/>
    </Representation>
  </Representations>
  <Items>
    <RepresentationItem xsi:type="n0:AxisPlacement" uid="repi--000000001AA415B0--18">
      <Position>0.0 0.0 0.0</Position>
    </RepresentationItem>
  </Items>
  <DimensionCount>3</DimensionCount>
</RepresentationContext>

<Part uid="p--000000001AA41A00">
  <Id>
    <Identifier uid="pid--000000001AA41A00--id7" id="nut" idRoleRef=",,rl--ii" idContextRef="o--000000178"/>
  </Id>
  ...
  <Versions>
    <PartVersion uid="pv--000000001AA41A00--id7">
    ...
      <Views>
        <PartView uid="pvv--000000001AA41A00--id7">
          <DefiningGeometry uidRef="egm--000000001AA41A00"/>
          ...
          <Occurrence xsi:type="n0:SingleOccurrence" uid="pi--000000001AA41A00--19">
            <Id id="nut.1"/>
          </Occurrence>
          ...
        </PartView>
      </Views>
    </PartVersion>
  </Versions>
</Part>
<RepresentationContext uid="ccs--origin-nut" xsi:type="n0:GeometricCoordinateSpace">
  <Id id="/NULL"/>
  <Representations>
```

```

    <Representation uid="egm--000000001AA41A00"
xsi:type="n0:ExternalGeometricModel">
      <Id id="nut.stp"/>
      <Items>
        <RepresentationItem uidRef="repi--000000001AA41A00--19"/>
      </Items>
      <ExternalFile uidRef="df--000000001AA41A00"/>
    </Representation>
  </Representations>
  <Items>
    <RepresentationItem xsi:type="n0:AxisPlacement" uid="repi--
000000001AA41A00--19">
      <Position>0.0 0.0 0.0</Position>
    </RepresentationItem>
  </Items>
  <DimensionCount>3</DimensionCount>
</RepresentationContext>
  
```

Entity GeometricRepresentationRelationshipWith-PlacementTransformation	Attribute type
ClassifiedAs	OPTIONAL SET[1:?] of Classification
Definitional	BOOLEAN
Description	OPTIONAL DescriptorSelect
Id	OPTIONAL IdentifierSelect
Related	ComposedGeometricModel or ExternalGeometricModel
Origin	AxisPlacement
Target	AxisPlacement

Table 36: "GeometricRepresentationRelationshipWithPlacementTransformation" Attributes

### Attribute recommendations

- **Definitional:** according to a WHERE rule in the EXPRESS model, shall be always TRUE (makes the related GeometricModel part of the definition of the relating GeometricModel).
- **Description:** the text or the set of texts that provides further information about the RepresentationRelationship. The value of this attribute need not be specified. Use "Description" template.
- **Related:** Reference to the ComposedGeometricModel or ExternalGeometricModel of the component part built into the assembly part
- **Origin:** Reference to the corresponding instance of AxisPlacement associated to the related ComposedGeometricModel or ExternalGeometricModel of the component part built into the assembly part. It is recommended to define an identity matrix within this AxisPlacement
- **Target:** Reference to the corresponding instance of AxisPlacement associated to the relating ComposedGeometricModel of the assembly part

- Other attributes than these are not covered by these Recommended Practices; their use is discouraged as it would depend on mutual agreements between data exchange partners.

### 7.3.2.2 Explicit Transformation

In this case, the RepresentationRelationship is of kind GeometricRepresentationRelationship-WithCartesianTransformation.

#### ***Preprocessor Recommendations:***

The AxisPlacement of the Component (Related) shall contain '0 0 0' for Position and no value for Axis and RefDirection.

The use of further subtypes of RepresentationItem (apart of AxisPlacement for the component part and CartesianTransformation for the assembly part) is not recommended.

As specified in the EXPRESS data model via a WHERE rule, each GeometricModel shall reference its own instance of GeometricCartesianSpace.

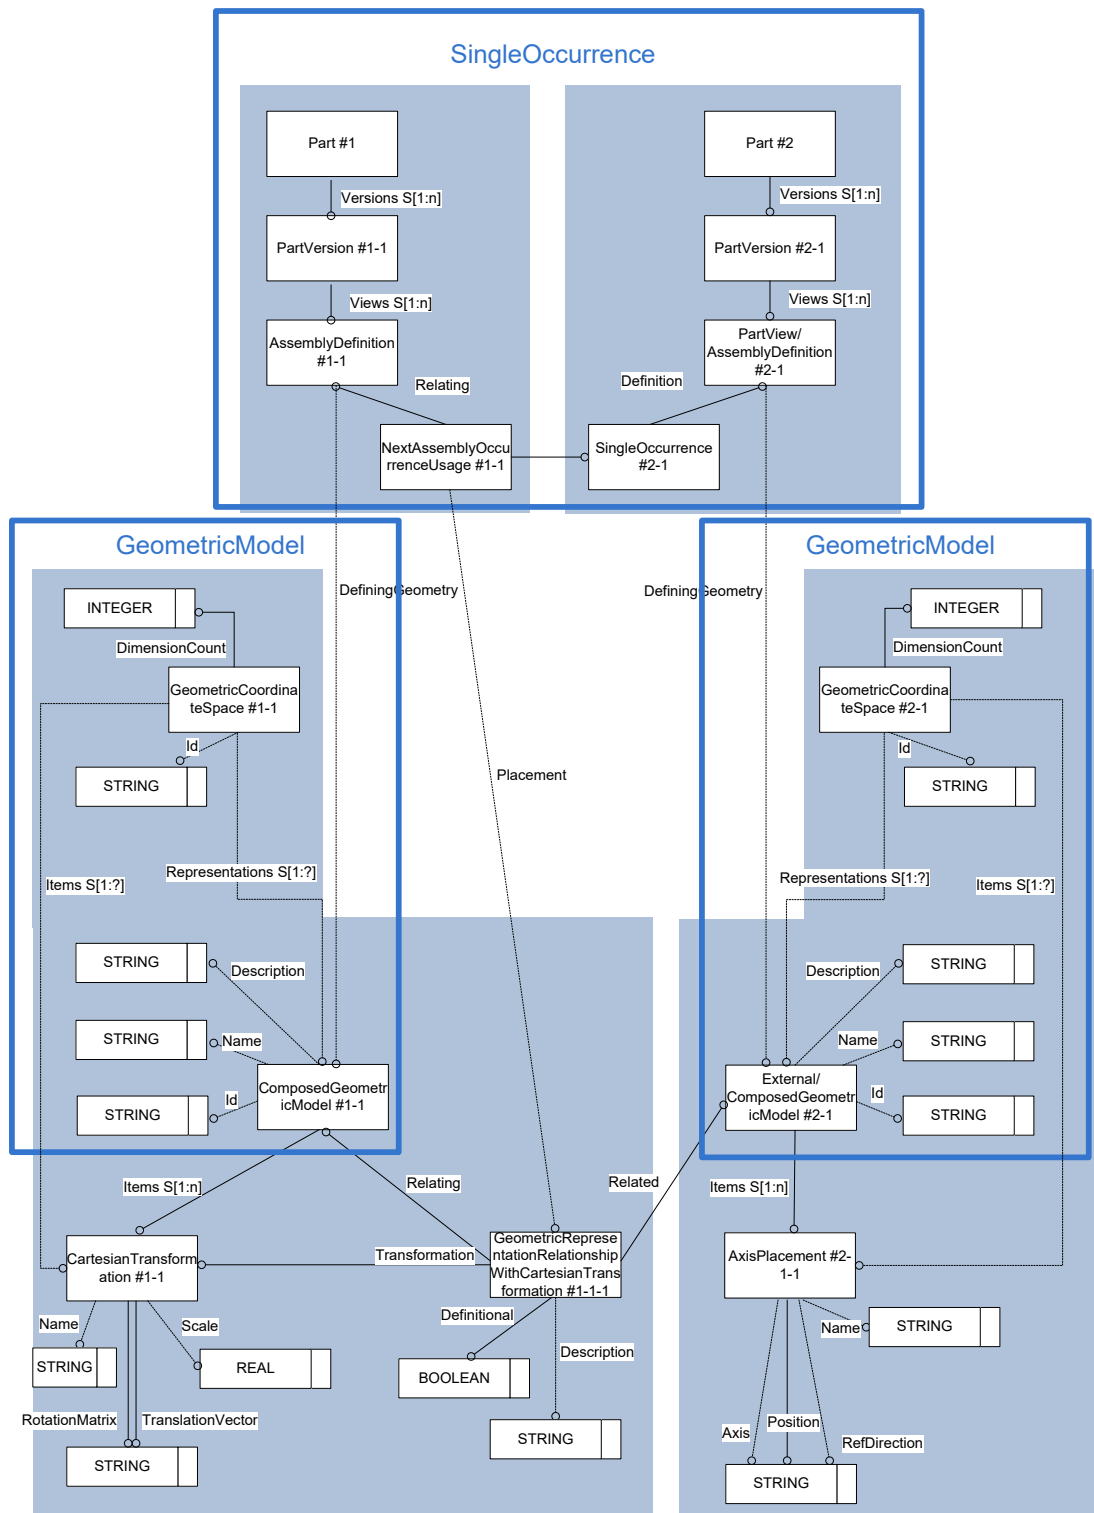


Figure 28: Full Positioning Representation with Explicit Transformation

## The Instance Model: STEP exchange file format (ISO10303 AP242 BO Model XML syntax)

```
<Part uid="p--0000000020AB6290">
  <Id>
    <Identifier uid="pid--0000000020AB6290--id5" id="nut and bolt"
idRoleRef=",,rl--ii" idContextRef="o--000000178"/>
  </Id>
  ...
  <Versions>
    <PartVersion uid="pv--0000000020AB6290--id5">
  ...
    <Views>
      <PartView xsi:type="n0:AssemblyDefinition" uid="pvv--
0000000020AB6290--id5">
  ...
        <ViewOccurrenceRelationship uid="pvvid--000000001AA415B0--18"
xsi:type="n0:NextAssemblyOccurrenceUsage">
          <Related uidRef="pi--000000001AA415B0--18"/>
          <RelationType>
            <ClassString>next assembly occurrence</ClassString>
          </RelationType>
          <Placement>
            <RepresentationRelationship uidRef="ctrafo--0000000013DF75A0-
-18"/>
          </Placement>
        </ViewOccurrenceRelationship>
        <ViewOccurrenceRelationship uid="pvvid--000000001AA41A00--19"
xsi:type="n0:NextAssemblyOccurrenceUsage">
          <Related uidRef="pi--000000001AA41A00--19"/>
          <RelationType>
            <ClassString>next assembly occurrence</ClassString>
          </RelationType>
          <Placement>
            <RepresentationRelationship uidRef="ctrafo--0000000013DF75A0-
-19"/>
          </Placement>
        </ViewOccurrenceRelationship>
      </PartView>
    </Views>
  </PartVersion>
</Versions>
</Part>
<RepresentationContext uid="ccs--origin-nut-and-bolt" xsi:type="n0:Ge-
ometricCoordinateSpace">
  <Id id="/NULL"/>
  <Representations>
    <Representation uid="egm--0000000020AB6290"
xsi:type="n0:ComposedGeometricModel">
      <Id id="nut and bolt"/>
      <Items>
        <RepresentationItem uidRef="repi--000000001AA41A00--18--2"/>
        <RepresentationItem uidRef="repi--000000001AA41A00--19--2"/>
      </Items>
    </Representation>
  </Representations>
</RepresentationContext>
```

```
<RepresentationRelationship uid="ctrafo--0000000013DF75A0--18"
xsi:type="n0:GeometricRepresentationRelationshipWithCartesianTransformation
">
  <Definitional>true</Definitional>
  <Related uidRef="egm--000000001AA415B0"/>
  <Transformation uidRef="repi--000000001AA41A00--18--2"/>
</RepresentationRelationship>
<RepresentationRelationship uid="ctrafo--0000000013DF75A0--19"
xsi:type="n0:GeometricRepresentationRelationshipWithCartesianTransformation
">
  <Definitional>true</Definitional>
  <Related uidRef="egm--000000001AA41A00"/>
  <Transformation uidRef="repi--000000001AA41A00--19--2"/>
</RepresentationRelationship>
</Representation>
</Representations>
<Items>
  <RepresentationItem uid="repi--000000001AA41A00--18--2"
xsi:type="n0:CartesianTransformation">
    <RotationMatrix>2.83808309622E-16 -1.48711849984E-5 0.999999999889
7.14623103897E-14 -0.999999999889 -1.48711849984E-5 1.0 7.146231460233355E-
14 -2.82745580352E-16</RotationMatrix>
    <TranslationVector>7451.5038 127.065 -443.85</TranslationVector>
  </RepresentationItem>
  <RepresentationItem uid="repi--000000001AA41A00--19--2"
xsi:type="n0:CartesianTransformation">
    <RotationMatrix>1.000000 0.000000 0.000000 0.000000 1.000000 0.000000
0.000000 0.000000 1.000000</RotationMatrix>
    <TranslationVector>-33.000000 0.000000 0.000000</TranslationVector>
  </RepresentationItem>
</Items>
<DimensionCount>3</DimensionCount>
</RepresentationContext>

<Part uid="p--000000001AA415B0">
  <Id>
    <Identifier uid="pid--000000001AA415B0--id6" id="bolt" idRoleRef=",,r1--
ii" idContextRef="o--000000178"/>
  </Id>
  ...
  <Versions>
    <PartVersion uid="pv--000000001AA415B0--id6">
      ...
      <Views>
        <PartView uid="pvv--000000001AA415B0--id6">
          <DefiningGeometry uidRef="egm--000000001AA415B0"/>
          ...
          <Occurrence xsi:type="n0:SingleOccurrence" uid="pi--
000000001AA415B0--18">
            <Id id="bolt.1"/>
          </Occurrence>
          ...
        </PartView>
      </Views>
    </PartVersion>
  </Versions>
</Part>
```



```
</PartVersion>
</Versions>
</Part>

<RepresentationContext uid="ccs--origin-bolt" xsi:type="n0:GeometricCoordinateSpace">
  <Id id="/NULL"/>
  <Representations>
    <Representation uid="egm--000000001AA415B0"
xsi:type="n0:ExternalGeometricModel">
      <Id id="bolt.stp"/>
      <Items>
        <RepresentationItem uidRef="repi--000000001AA415B0--18"/>
      </Items>
      <ExternalFile uidRef="df--000000001AA415B0"/>
    </Representation>
  </Representations>
  <Items>
    <RepresentationItem xsi:type="n0:AxisPlacement" uid="repi--000000001AA415B0--18">
      <Position>0.0 0.0 0.0</Position>
    </RepresentationItem>
  </Items>
  <DimensionCount>3</DimensionCount>
</RepresentationContext>

<Part uid="p--000000001AA41A00">
  <Id>
    <Identifier uid="pid--000000001AA41A00--id7" id="nut" idRoleRef=",,rl--ii" idContextRef="o--000000178"/>
  </Id>
  ...
  <Versions>
    <PartVersion uid="pv--000000001AA41A00--id7">
  ...
    <Views>
      <PartView uid="pvv--000000001AA41A00--id7">
        <DefiningGeometry uidRef="egm--000000001AA41A00"/>
  ...
        <Occurrence xsi:type="n0:SingleOccurrence" uid="pi--000000001AA41A00--19">
          <Id id="nut.1"/>
        </Occurrence>
  ...
      </PartView>
    </Views>
  </PartVersion>
</Versions>
</Part>

<RepresentationContext uid="ccs--origin-nut" xsi:type="n0:GeometricCoordinateSpace">
  <Id id="/NULL"/>
  <Representations>
```

```

    <Representation uid="egm--000000001AA41A00"
xsi:type="n0:ExternalGeometricModel">
      <Id id="nut.stp"/>
      <Items>
        <RepresentationItem uidRef="repi--000000001AA415B0--18"/>
      </Items>
      <ExternalFile uidRef="df--000000001AA415B0"/>
    </Representation>
  </Representations>
  <Items>
    <RepresentationItem xsi:type="n0:AxisPlacement" uid="repi--
000000001AA41A00--19">
      <Position>0.0 0.0 0.0</Position>
    </RepresentationItem>
  </Items>
  <DimensionCount>3</DimensionCount>
</RepresentationContext>
  
```

Entity GeometricRepresentationRelationship- WithCartesianTransformation	Attribute type
ClassifiedAs	OPTIONAL SET[1:?] of Classification
Definitional	BOOLEAN
Description	OPTIONAL DescriptorSelect
Id	OPTIONAL IdentifierSelect
Related	ComposedGeometricModel or ExternalGeometricModel
Transformation	CartesianTransformation

Table 37: "GeometricRepresentationRelationshipWithCartesianTransformation" Attributes

### Attribute recommendations

- **Definitional:** always TRUE (makes the related GeometricModel part of the definition of the relating GeometricModel).
- **Description:** the text or the set of texts that provides further information about the RepresentationRelationship. The value of this attribute need not be specified. Use "Description" template.
- **Related:** Reference to the ComposedGeometricModel or ExternalGeometricModel of the component part built into the assembly part
- **Transformation:** Reference to the corresponding instance of CartesianTransformation associated to the relating ComposedGeometricModel of the assembly part
- Other attributes than these are not covered by these Recommended Practices; their use is discouraged as it would depend on mutual agreements between data exchange partners.

### 7.3.2.3 Same Coordinate Space

In this case, the RepresentationRelationship is of kind GeometricRepresentationRelationship-WithSameCoordinateSpace.

It can only apply to identify 3D transformations (identity matrix).

#### ***Preprocessor Recommendations:***

The AxisPlacement of the Component (Related) and of the Assembly (Relating) shall contain '0 0 0' for Position and no value. for Axis and RefDirection.

The use of further subtypes of RepresentationItem (apart of AxisPlacement for the component part and for the assembly part) is not recommended.

As specified in the EXPRESS data model via a WHERE rule, unlike the two previous mapping alternatives, in this case the upper and lower GeometricModel shall share the same instance of GeometricCartesianSpace.

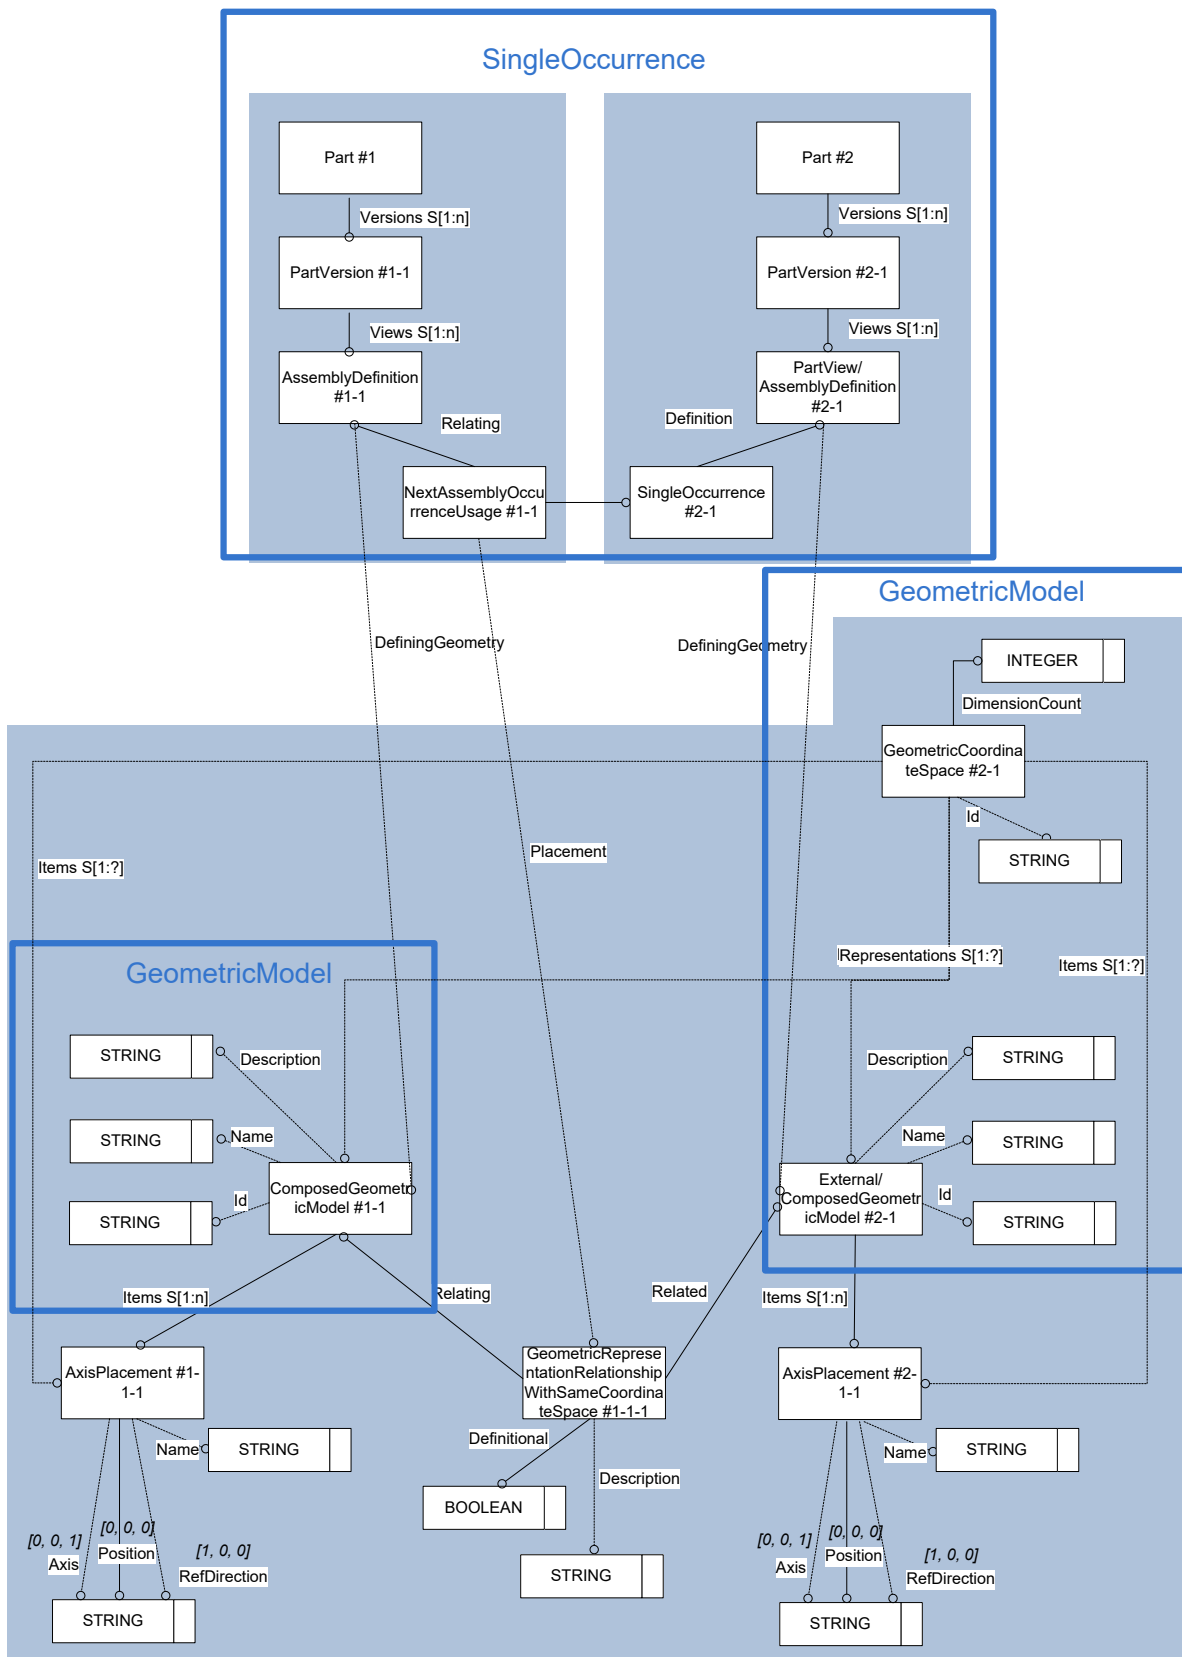


Figure 29: Full Positioning Representation with Same Coordinate Space

## The Instance Model: STEP exchange file format (ISO10303 AP242 BO Model XML syntax)

```
<Part uid="p--0000000020AB6290">
  <Id>
    <Identifier uid="pid--0000000020AB6290--id5" id="nut and bolt"
idRoleRef=",,rl--ii" idContextRef="o--000000178"/>
  </Id>
  ...
  <Versions>
    <PartVersion uid="pv--0000000020AB6290--id5">
  ...
    <Views>
      <PartView xsi:type="n0:AssemblyDefinition" uid="pvv--
0000000020AB6290--id5">
  ...
        <ViewOccurrenceRelationship uid="pvvid--000000001AA415B0--18"
xsi:type="n0:NextAssemblyOccurrenceUsage">
          <Related uidRef="pi--000000001AA415B0--18"/>
          <RelationType>
            <ClassString>next assembly occurrence</ClassString>
          </RelationType>
          <Placement>
            <RepresentationRelationship uidRef="ctrafo--0000000013DF75A0-
-18"/>
          </Placement>
        </ViewOccurrenceRelationship>
        <ViewOccurrenceRelationship uid="pvvid--000000001AA41A00--19"
xsi:type="n0:NextAssemblyOccurrenceUsage">
          <Related uidRef="pi--000000001AA41A00--19"/>
          <RelationType>
            <ClassString>next assembly occurrence</ClassString>
          </RelationType>
          <Placement>
            <RepresentationRelationship uidRef="ctrafo--0000000013DF75A0-
-19"/>
          </Placement>
        </ViewOccurrenceRelationship>
      </PartView>
    </Views>
  </PartVersion>
</Versions>
</Part>

<RepresentationContext uid="ccs--origin-nut-and-bolt" xsi:type="n0:Ge-
ometricCoordinateSpace">
  <Id id="/NULL"/>
  <Representations>
    <Representation uid="egm--0000000020AB6290"
xsi:type="n0:ComposedGeometricModel">
      <Id id="nut and bolt"/>
      <Items>
        <RepresentationItem uidRef="repi--000000001AA41A00--18--2"/>
        <RepresentationItem uidRef="repi--000000001AA41A00--19--2"/>
      </Items>
    </Representation>
  </Representations>
</RepresentationContext>
```

```
<RepresentationRelationship uid="ctrafo--0000000013DF75A0--18"
xsi:type="n0:GeometricRepresentationRelationshipWithSameCoordinateSpace">
  <Definitional>true</Definitional>
  <Related uidRef="egm--000000001AA415B0"/>
</RepresentationRelationship>
<RepresentationRelationship uid="ctrafo--0000000013DF75A0--19"
xsi:type="n0:GeometricRepresentationRelationshipWithSameCoordinateSpace">
  <Definitional>true</Definitional>
  <Related uidRef="egm--000000001AA41A00"/>
</RepresentationRelationship>
</Representation>
<Representation uid="egm--000000001AA415B0" xsi:type="n0:ExternalGe-
ometricModel">
  <Id id="bolt.jt"/>
  <Items>
    <RepresentationItem uidRef="repi--000000001AA415B0--18"/>
  </Items>
  <ExternalFile uidRef="df--000000001AA415B0"/>
</Representation>
<Representation uid="egm--000000001AA41A00" xsi:type="n0:ExternalGe-
ometricModel">
  <Id id="nut.jt"/>
  <Items>
    <RepresentationItem uidRef="repi--000000001AA41A00--19"/>
  </Items>
  <ExternalFile uidRef="df--000000001AA41A00"/>
</Representation>
</Representations>
<Items>
  <RepresentationItem uid="repi--000000001AA41A00--18--2"
xsi:type="n0:AxisPlacement">
    <Position>0.0 0.0 0.0</Position>
  </RepresentationItem>
  <RepresentationItem uid="repi--000000001AA41A00--19--2"
xsi:type="n0:AxisPlacement">
    <Position>0.0 0.0 0.0</Position>
  </RepresentationItem>
  <RepresentationItem xsi:type="n0:AxisPlacement" uid="repi--
000000001AA415B0--18">
    <Position>0.0 0.0 0.0</Position>
  </RepresentationItem>
  <RepresentationItem xsi:type="n0:AxisPlacement" uid="repi--
000000001AA41A00--19">
    <Position>0.0 0.0 0.0</Position>
  </RepresentationItem>
</Items>
<DimensionCount>3</DimensionCount>
</RepresentationContext>

<Part uid="p--000000001AA415B0">
  <Id>
    <Identifier uid="pid--000000001AA415B0--id6" id="bolt" idRoleRef=",,r1--
ii" idContextRef="o--000000178"/>
  </Id>
  ...
  <Versions>
    <PartVersion uid="pv--000000001AA415B0--id6">
```

```

...
    <Views>
      <PartView uid="pvv--000000001AA415B0--id6">
        <DefiningGeometry uidRef="egm--000000001AA415B0"/>
...
        <Occurrence xsi:type="n0:SingleOccurrence" uid="pi--
000000001AA415B0--18">
          <Id id="bolt.1"/>
        </Occurrence>
...
      </PartView>
    </Views>
  </PartVersion>
</Versions>
</Part>

<Part uid="p--000000001AA41A00">
  <Id>
    <Identifier uid="pid--000000001AA41A00--id7" id="nut" idRoleRef=",,rl--
ii" idContextRef="o--000000178"/>
  </Id>
...
  <Versions>
    <PartVersion uid="pv--000000001AA41A00--id7">
...
      <Views>
        <PartView uid="pvv--000000001AA41A00--id7">
          <DefiningGeometry uidRef="egm--000000001AA41A00"/>
...
          <Occurrence xsi:type="n0:SingleOccurrence" uid="pi--
000000001AA41A00--19">
            <Id id="nut.1"/>
          </Occurrence>
...
        </PartView>
      </Views>
    </PartVersion>
  </Versions>
</Part>

```

Entity GeometricRepresentationRelationshipWith-SameCoordinateSpace	Attribute type
ClassifiedAs	OPTIONAL SET[1:?] of Classification
Definitional	BOOLEAN
Description	OPTIONAL DescriptorSelect
Id	OPTIONAL IdentifierSelect
Related	ComposedGeometricModel or ExternalGeometricModel

Table 38: "GeometricRepresentationRelationshipWithSameCoordinateSpace" Attributes

### Attribute recommendations

- **Definitional:** always TRUE (makes the related GeometricModel part of the definition of the relating GeometricModel).
- **Description:** the text or the set of texts that provides further information about the RepresentationRelationship. The value of this attribute need not be specified. Use “Description” template.
- **Related:** Reference to the ComposedGeometricModel or ExternalGeometricModel of the component part built into the assembly part
- Other attributes than these are not covered by these Recommended Practices; their use is discouraged as it would depend on mutual agreements between data exchange partners.

### 7.3.3 General Geometric Representation Relationship

Beside the existing subtypes of RepresentationRelationship defined in the previous sections, GeneralGeometricRepresentationRelationship shall support any other relationships between GeometricRepresentations.

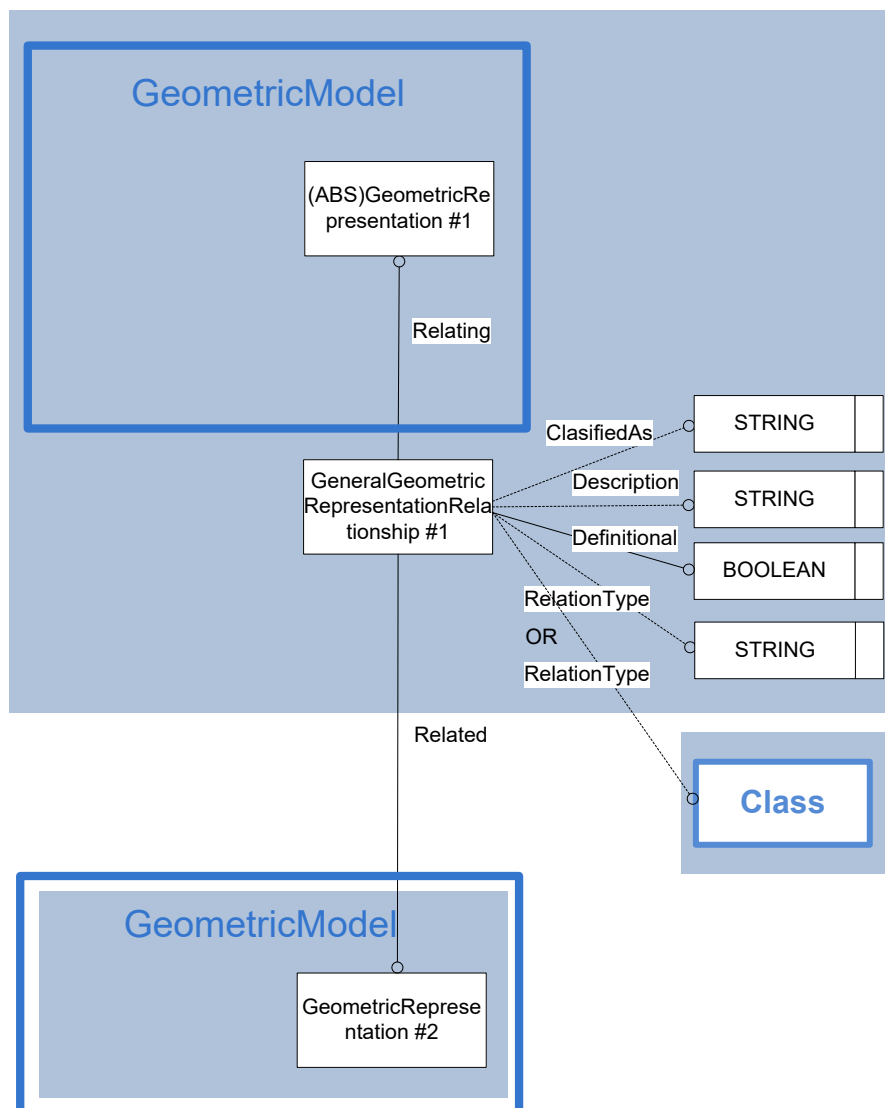


Figure 30: General Geometric Representation Relationship



## The Instance Model: STEP exchange file format (ISO10303 AP242 BO Model XML syntax)

```

<RepresentationContext uid="ccs--1" xsi:type="n0:GeometricCoordinateSpace">
  <Id id="/NULL"/>
  <Representations>
    <Representation xsi:type="n0:Mechanism" uid="kin--0000000006039F00--m">
...
      <Id id="kin--0000000006039F00--m"/>
...
      <RepresentationRelationship uid="kin--0000000006039F00--mrel"
xsi:type="n0:GeneralGeometricRepresentationRelationship">
        <Definitional>false</Definitional>
        <Related uidRef="kin--0000000006039F00--m2"/>
        <RelationType>import</RelationType>
      </RepresentationRelationship>
    </Representation>
...
  </Representations>
...
</RepresentationContext>
  
```

Entity GeneralGeometricRepresentationRelationship	Attribute type
ClassifiedAs	OPTIONAL SET[1:?] of Classification
Definitional	BOOLEAN
Description	OPTIONAL DescriptorSelect
Id	OPTIONAL IdentifierSelect
Related	ComposedGeometricModel or ExternalGeometricModel
RelationType	ClassSelect

Table 39: "General Geometric Representation Relationship" Attributes

### Attribute recommendations

- **Definitional:** always FALSE in case of RelationType='import' or 'local' (the imported or local dressup Mechanism is not part of the definition of the master Mechanism) and always TRUE in case of RelationType='decomposition' (the single GeometricModels are part of the definition of the overall GeometricModel).
- **Description:** the text or the set of texts that provides further information about the RepresentationRelationship. The value of this attribute need not be specified. Use "Description" template.
- **Related:** Reference to the decomposed GeometricModel (in case of RelationType='decomposition' or to the imported/local dressup Mechanism (in case of RelationType='import' or 'local')

- **RelationType**: the meaning of the relationship. Use ClassString type if one of the values below is used, otherwise use “Class” template (see 4.6.4). According to the ISO AP242 Specification, where applicable, the following values shall be used:

RelationType	
'decomposition'	The business object defines a relationship where the related GeometricModel is one of potentially more sub models of the relating GeometricModel
'import'	The business object defines a relationship where the related dressup Mechanism imports all aspects of the relating master Mechanism
'local'	The business object defines a relationship where the related dressup Mechanism is locally defined on the relating master Mechanism

- Other attributes than these are not covered by these Recommended Practices; their use is discouraged as it would depend on mutual agreements between data exchange partners.

#### 7.4 Template “PartViewRelationship”

These are the special cases, where the use of PartViewRelationship is recommended:

- where some properties need to be exchanged on PartViewRelationship
- where the quantity to be stored in NextAssemblyViewUsage deviates from the number of Occurrences given by NextAssemblyOccurrenceUsage
- where part usage substitution rules shall be mapped between PartViewRelationships (so-called AssemblyViewRelationshipSubstitutions, see chapter 7.5.3)

The use of the other subtypes of PartViewRelationship (except NextAssemblyViewUsage), is not recommended (not in scope of this document).

#### **Preprocessor Recommendation:**

Some PDM systems have an object to aggregate all the usages of a component in the next assembly node (with quantity N) and another object to map each usage of the component (with an occurrence.id and a 3D position matrix). The quantity n can deviate from the sum of the occurrences, for example expressing the intent to use that many occurrences but not all occurrences are established yet.

To map such an aggregation object, the use of NextAssemblyViewUsage as subtype of PartViewRelationship (with quantity N) is appropriate.

If some Properties attached to the aggregation object are exported by the source PDM system, the PartViewRelationship can be created and those properties attached to it.

It is not recommended to use multiple PartViewRelationships between the same parent and child, since this is not supported by all PDM systems.

The usage of NextAssemblyViewUsage as subtype of PartViewRelationship is mandatory in order to map AssemblyViewRelationshipSubstitutions.

**Postprocessor Recommendation:**

If the target PDM system has also an aggregation object as defined above, it may import the properties associated to the PartViewRelationship objects (but only the properties and not the assembly structure defined below it) as well as the NextAssemblyViewUsage.quantity (as 'target' quantity, independently of the number of NextAssemblyOccurrenceUsages attached to the is part.

If such an aggregation object is not provided in the target system, or if it gets created automatically out of the sum of all NextAssemblyOccurrenceUsages, the postprocessor shall ignore the PartViewRelationship/NextAssemblyViewUsage.

In both cases, the PartViewRelationship/NextAssemblyViewUsages and the NextAssemblyOccurrenceUsages shall not be interpreted in addition to each other; otherwise an assembly with too many components would be imported.

The postprocessor shall recognize multiple PartViewRelationships between the same parent and child, and (if the target system doesn't support it) merge all of them to one during import.

To enable to combine PartViewRelationship/NextAssemblyViewUsages and NextAssemblyOccurrenceUsages with the appropriate semantic, a Bugzilla issue [#6022](#) has been submitted.

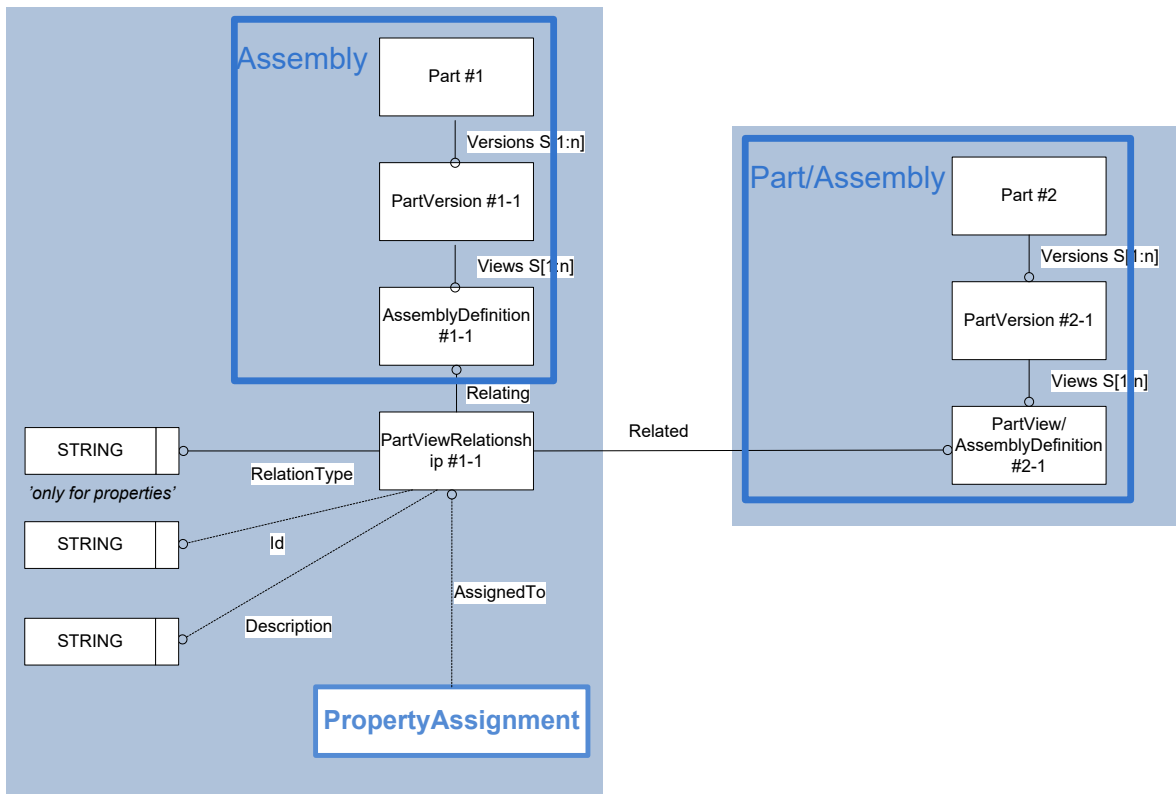


Figure 31: Template "PartViewRelationship" for properties

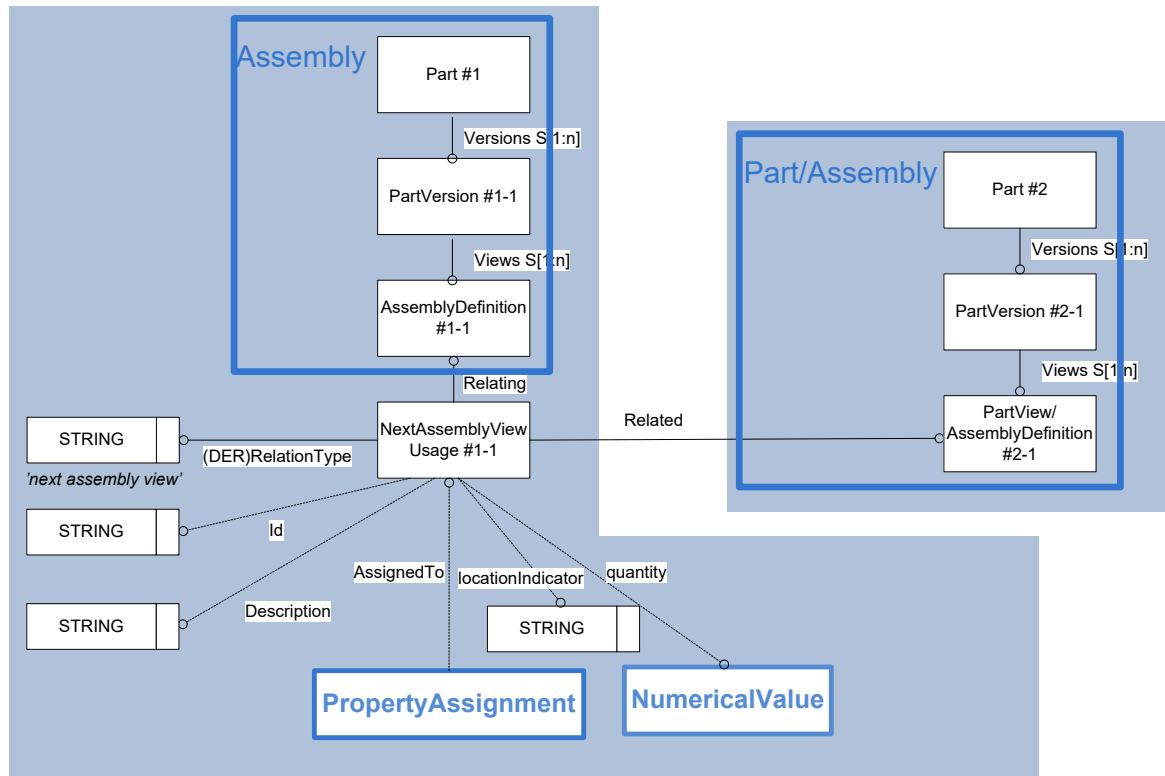


Figure 32: Template "PartViewRelationship" for quantity (+ properties)

## The Instance Model: STEP exchange file format (ISO10303 AP242 BO Model XML syntax)

```

<PropertyDefinition uid="i1067">
  <Id id="quality property"/>
  <PropertyType>
    <ClassString>PDM property</ClassString>
  </PropertyType>
</PropertyDefinition>
<Part uid="p--0000000017086CB0">
  <Id>
    <Identifier uid="pid--0000000017086CB0--id1" id="as1" idRoleRef=„rl--
ii" idContextRef="o--000000178"/>
  </Id>
  ...
  <Versions>
    <PartVersion uid="pv--0000000017086CB0--id1">
      ...
      <Views>
        <PartView xsi:type="n0:AssemblyDefinition" uid="pvv--
0000000017086CB0--id1">
          ...
          <PartViewRelationship uid="pvrid--000000001E5A89F0--10">
            <Related uidRef="pvv--000000001E5A89F0--id2"/>
            <RelationType>
              <ClassString>only for properties</ClassString>
            </RelationType>
            <PropertyValueAssignment uid="i1769">
              <AssignedPropertyValues>
                <PropertyValue uid="i1771" xsi:type="n0:StringValue">
                  <Definition>
                    <PropertyDefinition uidRef="i1067"> </PropertyDefi-
nition>

```

```

    </Definition>
    <Name>
      <CharacterString>lineNumber</CharacterString>
    </Name>
    <ValueComponent>
      <CharacterString>40</CharacterString>
    </ValueComponent>
...
    </AssignedPropertyValues>
  </PropertyValueAssignment>
...
</PartViewRelationship>
...
</PartView>
</Views>
</PartVersion>
</Versions>
</Part>
<Part uid="p--000000001E5A89F0">
  <Id>
    <Identifier uid="pid--000000001E5A89F0--id2" id="plate" idRoleRef=",,rl--
ii" idContextRef="o--000000178"/>
  </Id>
...
  <Versions>
    <PartVersion uid="pv--000000001E5A89F0--id2">
...
      <Views>
        <PartView uid="pvv--000000001E5A89F0--id2">
...
      </PartView>
    </Views>
  </PartVersion>
</Versions>
</Part>

```

Entity PartViewRelationship	Attribute type
ClassifiedAs	OPTIONAL SET[1:?] of Classification
Description	OPTIONAL DescriptorSelect
Id	OPTIONAL IdentifierSelect
MaterialIdentification	OPTIONAL SET[1:?] of MaterialIdentification
Related	PartView
RelationType	ClassSelect
ActivityAssignment	OPTIONAL SET[1:?] of ActivityAssignment
ActivityMethodAssignment	OPTIONAL SET[1:?] of ActivityMethodAssign- ment
ApprovalAssignment	OPTIONAL SET[1:?] of ApprovalAssignment
CertificationAssignment	OPTIONAL SET[1:?] of CertificationAssignment
ConditionAssignment	OPTIONAL SET[1:?] of ConditionAssignment
DateAndPersonAssignment	OPTIONAL SET[1:?] of DateAndPersonAssign- ment
DateTimeAssignment	OPTIONAL SET[1:?] of DateTimeAssignment

DocumentAssignment	OPTIONAL SET[1:?] of DocumentAssignment
EffectivityAssignment	OPTIONAL SET[1:?] of EffectivityAssignment
EventAssignment	OPTIONAL SET[1:?] of EventAssignment
FrozenAssignment	OPTIONAL SET[1:?] of FrozenAssignment
InformationUsageRightAssignment	OPTIONAL SET[1:?] of InformationUsageRightAssignment
ModelPropertyAssignment	OPTIONAL SET[1:?] of ModelPropertyAssignment
OrganizationOrPersonInOrganizationAssignment	OPTIONAL SET[1:?] of OrganizationOrPersonInOrganizationAssignment
PropertyDefinitionAssignment	OPTIONAL SET[1:?] of PropertyDefinitionAssignment
PropertyValueAssignment	OPTIONAL SET[1:?] of PropertyValueAssignment
SecurityClassificationAssignment	OPTIONAL SET[1:?] of SecurityClassificationAssignment
TimeIntervalAssignment	OPTIONAL SET[1:?] of TimeIntervalAssignment
WorkRequestAssignment	OPTIONAL SET[1:?] of WorkRequestAssignment

Table 40: "PartViewRelationship" Attributes

**Attribute recommendations**

- **Description:** the text or the set of texts that provide further information about the Assembly structure link. The value of this attribute need not be specified. Use "Description" template.
- **Id:** stores the Identifier for the PartViewRelationship (if set, shall be unique over all PartViewRelationship directly referenced by an assembly part). The value of this attribute need not be specified. Use IdentifierString type.
- **Related:** Reference to a PartView of the component part built into the assembly part.
- **RelationType:** the meaning of the relationship. Use ClassString type. Recommended values are:

RelationType	
'next assembly view'	The quantity to be stored in NextAssemblyViewUsage deviates from the number of Occurrences given by NextAssemblyOccurrenceUsage (see above in this section), or some substitute parts are defined via AssemblyViewRelationshipSubstitution (see section 7.5.3) According to the definition of NextAssemblyViewUsage (subtype of PartViewRelationship), only this value of RelationType is allowed (DERIVE attribute with fix value)
'only for properties'	Some properties are exchanged along the assembly structure on PartViewRelationship level

'tracking'	The PartViewRelationship relates different views of a complex product structure (see section 15.2)
------------	--

According to the above recommendation not to use multiple PartViewRelationships between the same parent and child, properties and substitutes for example shall be mapped on the same instance. In such a case, use 'next assembly view' as soon as NextAssemblyViewUsage is engaged.

- **PropertyValueAssignment:** adds the value of a property to the PartViewRelationship. Use "PropertyAssignment" template (see 6.2)
- Other attributes than these are not covered by these Recommended Practices; their use is discouraged as it would depend on mutual agreements between data exchange partners.

## The Instance Model: STEP exchange file format (ISO10303 AP242 BO Model XML syntax)

```

<Part uid="p--0000000017086CB0">
  <Id>
    <Identifier uid="pid--0000000017086CB0--id1" id="as1" idRoleRef=",,rl--ii" idContextRef="o--000000178"/>
  </Id>
  ...
  <Versions>
    <PartVersion uid="pv--0000000017086CB0--id1">
      ...
      <Views>
        <PartView xsi:type="n0:AssemblyDefinition" uid="pvv--0000000017086CB0--id1">
          ...
          <PartViewRelationship xsi:type="n0:NextAssemblyViewUsage" uid="pvrid--000000001E5A89F0--10">
            <Related uidRef="pvv--000000001E5A89F0--id2"/>
            <RelationType>
              <ClassString>next assembly view</ClassString>
            </RelationType>
          ...
          <Quantity uid="i1770" xsi:type="n0:NumericalValue">
            <Definition>
              <PropertyDefinitionString>quantity</PropertyDefinitionString>
            </Definition>
            <Unit uidRef="i1231"></Unit>
            <ValueComponent>1.</ValueComponent>
          </Quantity>
        </PartViewRelationship>
      ...
    </PartView>
  </Views>
</PartVersion>
</Versions>
</Part>

<Unit uid="i1231">
  <Name>
    <ClassString>each</ClassString>
  
```

```

    </Name>
  </Unit>

  <Part uid="p--000000001E5A89F0">
    <Id>
      <Identifier uid="pid--000000001E5A89F0--id2" id="plate" idRoleRef=„rl--
ii" idContextRef="o--000000178"/>
    </Id>
    ...
    <Versions>
      <PartVersion uid="pv--000000001E5A89F0--id2">
        ...
        <Views>
          <PartView uid="pvv--000000001E5A89F0--id2">
            ...
          </PartView>
        </Views>
      </PartVersion>
    </Versions>
  </Part>

```

Entity NextAssemblyViewUsage	Attribute type (additionaly to PartViewRelationship)
ClassifiedAs	OPTIONAL SET[1:?] of Classification
Description	OPTIONAL DescriptorSelect
Id	OPTIONAL IdentifierSelect
MaterialIdentification	OPTIONAL SET[1:?] of MaterialIdentification
Related	PartView
RelationType	ClassSelect
ActivityAssignment	OPTIONAL SET[1:?] of ActivityAssignment
ActivityMethodAssignment	OPTIONAL SET[1:?] of ActivityMethodAssignment
ApprovalAssignment	OPTIONAL SET[1:?] of ApprovalAssignment
CertificationAssignment	OPTIONAL SET[1:?] of CertificationAssignment
ConditionAssignment	OPTIONAL SET[1:?] of ConditionAssignment
DateAndPersonAssignment	OPTIONAL SET[1:?] of DateAndPersonAssignment
DateTimeAssignment	OPTIONAL SET[1:?] of DateTimeAssignment
DocumentAssignment	OPTIONAL SET[1:?] of DocumentAssignment
EffectivityAssignment	OPTIONAL SET[1:?] of EffectivityAssignment
EventAssignment	OPTIONAL SET[1:?] of EventAssignment
FrozenAssignment	OPTIONAL SET[1:?] of FrozenAssignment
InformationUsageRightAssignment	OPTIONAL SET[1:?] of InformationUsageRightAssignment
ModelPropertyAssignment	OPTIONAL SET[1:?] of ModelPropertyAssignment



OrganizationOrPersonInOrganizationAssignment	OPTIONAL SET[1:?] of OrganizationOrPersonInOrganizationAssignment
PropertyDefinitionAssignment	OPTIONAL SET[1:?] of PropertyDefinitionAssignment
PropertyValueAssignment	OPTIONAL SET[1:?] of PropertyValueAssignment
SecurityClassificationAssignment	OPTIONAL SET[1:?] of SecurityClassificationAssignment
TimeIntervalAssignment	OPTIONAL SET[1:?] of TimeIntervalAssignment
WorkRequestAssignment	OPTIONAL SET[1:?] of WorkRequestAssignment
DefiningGeometry	OPTIONAL GeometricModel
LocationIndicator	OPTIONAL IdentifierSelect
Quantity	OPTIONAL ValueWithUnit
ShapeDependentProperty	OPTIONAL SET[1:?] of ShapeDependentProperty
ShapeElement	OPTIONAL SET[1:?] of ShapeElement
SurfaceCondition	OPTIONAL SET[1:?] of SurfaceCondition
AssemblyViewRelationshipSubstitution	OPTIONAL SET[1:?] of AssemblyViewRelationshipSubstitution
RequirementAssignment	OPTIONAL SET[1:?] of RequirementAssignment

*Table 41: "NextAssemblyViewUsage" Attributes*

### **Attribute recommendations**

- **LocationIndicator:** the text that identifies this usage of the component in the assembly in a diagram, list, chart, or on a physical piece of equipment. The value of this attribute need not be specified Use IdentifierString type.
- **Quantity:** the [ValueWithUnit](#) that defines the amount of this usage of the component in the assembly. The value of this attribute need not be specified. Use NumericalValue template. Since the semantic is handled here by the attribute naming, use PropertyDefinitionString='quantity' for Quantity.Definition (see section 4.6.9).
- Other attributes than these are not covered by these Recommended Practices; their use is discouraged as it would depend on mutual agreements between data exchange partners.

## 7.5 Alternate and Substitute Parts

*Note: This section is currently under development in the PDM-IF, based on user requirements. Definitions in this section might be changed or extended in future revisions of this document.*

This chapter describes the handling of alternate and substitute parts.

This table gives an overview of all alternate/substitute mechanisms, as well as their support by the PDM systems:

AP242				PDM Systems (Aras, Teamcenter?, Windchill, 3DExp)			
Part P1	PartVersion	NextAssemblyViewUsage #NAVU1 (effectivity#1 or #2)	P2	Only Windchill: PartMaster P1	PartVersion	Part BOM (effectivity#1 or #2)	P2
		NextAssemblyOccurrenceUsage #NAOU1 (placement#1 effectivity#1)	Occurrence of P2			BOM Instance (placement#1 effectivity#1)	
		NextAssemblyOccurrenceUsage #NAOU2 (placement#1 effectivity#1)	Occurrence of P3	Only 3DExp:		???	Substitute PartVersion P3
		NextAssemblyOccurrenceUsage #NAOU3 (placement#1 effectivity#1)	Occurrence of P4	Only 3DExp:		???	Substitute PartVersion P4
		NextAssemblyOccurrenceUsage #NAOU4 (placement#2 effectivity#1)	Occurrence of P2			BOM Instance (placement#2 effectivity#1)	
		NextAssemblyOccurrenceUsage #NAOU5 (placement#2 effectivity#1)	Occurrence of P5	Only 3DExp:		???	Substitute PartVersion P5
		NextAssemblyOccurrenceUsage #NAOU6 (placement#2 effectivity#1)	Occurrence of P6	Only 3DExp:		???	Substitute PartVersion P6
		NextAssemblyOccurrenceUsage #NAOU7 (placement#3 effectivity#2)	Occurrence of P2			BOM Instance (placement#3 effectivity#2)	
		NextAssemblyViewUsage #NAVU2 (effectivity#1 or #2)	AssemblyViewRelationshipSubstitution between #NAVU1 and #NAVU2	Except 3DExp:		Substitute	PartVersion P7
		NextAssemblyViewUsage #NAVU3 (effectivity#1 or #2)	AssemblyViewRelationshipSubstitution between #NAVU1 and #NAVU3	Except 3DExp:		Substitute	PartVersion P8
		AlternatePartVersionRelationship		Except Windchill:	Alternate	PartVersion P10	
		AlternatePartVersionRelationship		Except Windchill:	Alternate	PartVersion P11	
		AlternatePartRelationship		Only Windchill:	Alternate	PartMaster P12	
		AlternatePartRelationship		Only Windchill:	Alternate	PartMaster P13	

Table 42: Overview of all Alternate/Substitute mechanisms

It helps to understand in the following sections why it might be necessary to map between them (if the source or target PDM system does not support it), and why effectivities, 3D placements and properties should be the same for the base part and all its alternate/substitute parts.

### 7.5.1 Template “AlternatePartRelationship”

An AlternatePartRelationship specifies that any version of the alternate part, may be used in place of any version of the base part, regardless of its usages and of its versions. The relationship established by the AlternatePartRelationship is not symmetric: if part B is an alternate part for part A, part A is not implied to be an alternate part for part B.

Here are some additional semantical aspects defined in the AP242 ISO document:

NOTE 1 If a part is an alternate for another part, it is understood that there is no interest in keeping track of which part, the base or any alternates specified, is used as a particular instance of the base part within a part structure

NOTE 2 An organization may track design changes for a base part, and establish effectivity conditions for the use of that base part in various assemblies to be manufactured. The use of an alternate part implies that an organization does not specify any particular version of the alternate part nor establish effectivities relating to it

A Bugzilla issue [#8185](#) has been created to remove this Note, since too restrictive in most PDM systems. For example, the base part might be an assembly while the alternate part (coming from a supplier) might be a single part.

NOTE 4 An **AlternatePartRelationship** for which the base part is an assembly involves that the entire part structure of the alternate part may be used in place of the base part and its part structure.

NOTE 5 This concept usually refers to form, fit, function, and quality. Additional properties such as performance, noise, endurance, or reliability may also be considered as a prerequisite for the replacement

EXAMPLE Two bolts of the same size are parts. One bolt has a square head and the other has a hexagonal head. The two bolts are considered equivalent with respect to form, fit, and function: they both have sufficiently close physical shape, they take up the same space when used, and they both serve to fasten two things together. Thus, one of these two bolts could be considered to be an alternate part for the other bolt.

### ***Preprocessor Recommendations:***

- If the alternate relationship shall apply between two part versions, use template `PartVersionRelationship` with `relationType` 'alternative' (see section 5.1.5).
- The relating and the related Parts shall be different objects.
- The value of `PartTypes` for the base and alternate part shall be the same.
- If the relation is symmetric in the source PDM system, then a reverse-relationship shall state that it applies in both directions.
- If there are more than one alternate part involved, a 'star' structure from the base part to each alternate part shall be mapped (this star maps the semantic, that there is a base part and a number of alternate parts. All the alternate parts are on the same semantical level, but not on the same semantical level than the base part.
- Alternate parts shall have no revision effectivities and their usages shall have no occurrence effectivities, since the ones defined on the base part also apply to the alternate parts.
- The combination of the base part and the alternate part shall be unique.

### ***Postprocessor Recommendations:***

- If the target system does not support `AlternatePartRelationship`, but only `PartVersionRelationship` (see section 5.1.5), it shall duplicate it between all versions of the base Part and all versions of the alternate Part that are mentioned in the XML file and map each of them as `PartVersionRelationship`.  
If no part versions are mentioned, the newest part version shall be considered.

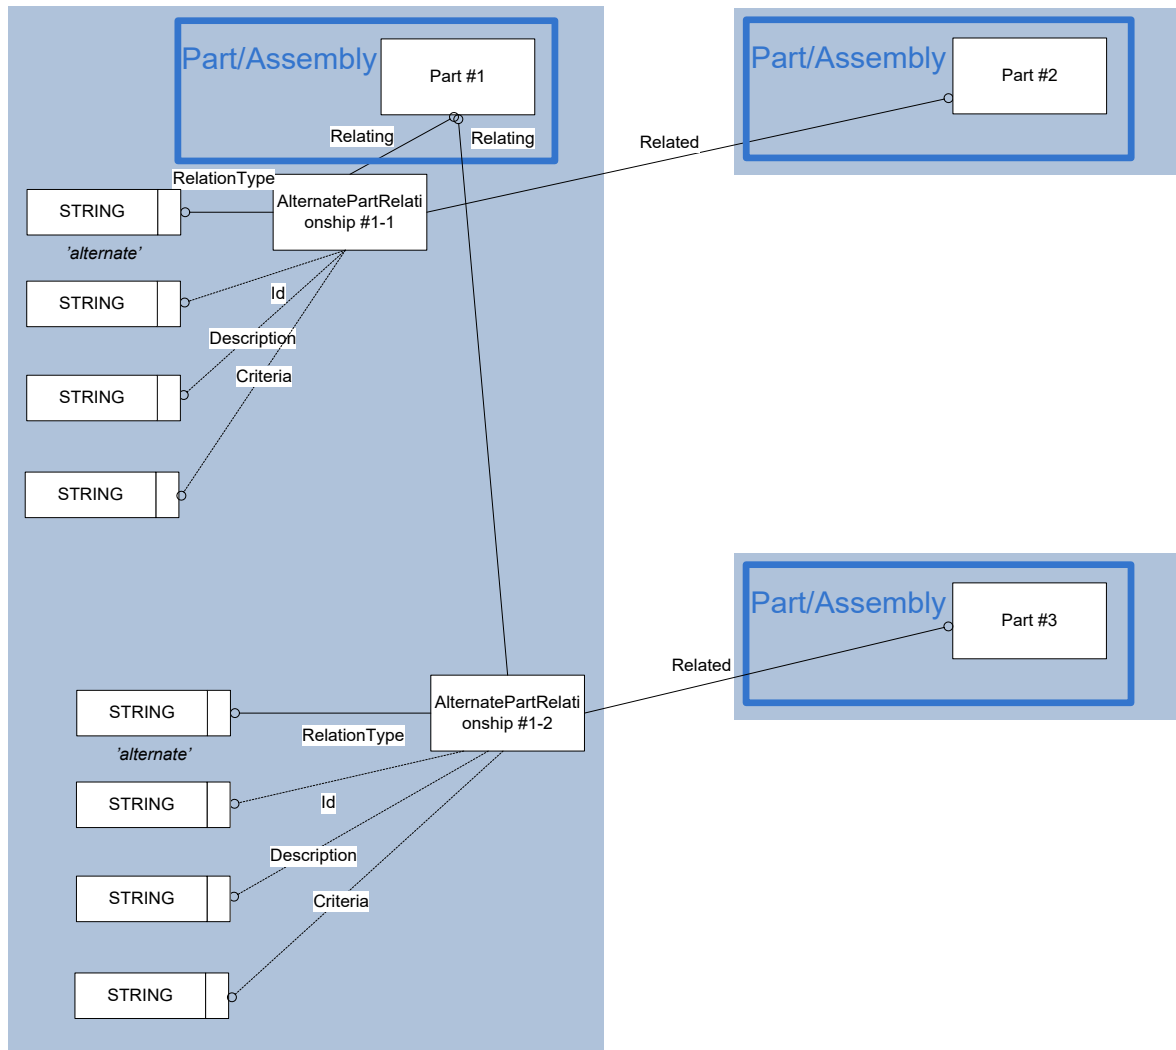


Figure 33: Template "AlternatePartRelationship"

### The Instance Model: STEP exchange file format (ISO10303 AP242 BO Model XML syntax)

```

<Part uid="p--000000001EAA8110">
...
  <Versions>
...
  </Versions>
  <PartRelationship uid="apr--1" xsi:type="n0:AlternatePartRelationship">
    <Related uidRef="p--0000000017D36B80"/>
    <RelationType>
      <ClassString>alternate</ClassString>
    </RelationType>
    <Criteria>
      <CharacterString>test</CharacterString>
    </Criteria>
  </PartRelationship>
</Part>

<Part uid="p--0000000017D36B80">
...
</Part>
    
```

Entity AlternatePartRelationship	Attribute type
ClassifiedAs	OPTIONAL SET[1:?] of Classification
Description	OPTIONAL DescriptorSelect
Id	OPTIONAL IdentifierSelect
Related	Part
RelationType	ClassSelect
ApprovalAssignment	OPTIONAL SET[1:?] of ApprovalAssignment
CertificationAssignment	OPTIONAL SET[1:?] of CertificationAssignment
DateAndPersonAssignment	OPTIONAL SET[1:?] of DateAndPersonAssignment
DateTimeAssignment	OPTIONAL SET[1:?] of DateTimeAssignment
DocumentAssignment	OPTIONAL SET[1:?] of DocumentAssignment
EffectivityAssignment	OPTIONAL SET[1:?] of EffectivityAssignment
EventAssignment	OPTIONAL SET[1:?] of EventAssignment
InformationUsageRightAssignment	OPTIONAL SET[1:?] of InformationUsageRightAssignment
ModelPropertyAssignment	OPTIONAL SET[1:?] of ModelPropertyAssignment
OrganizationOrPersonInOrganizationAssignment	OPTIONAL SET[1:?] of OrganizationOrPersonInOrganizationAssignment
PropertyDefinitionAssignment	OPTIONAL SET[1:?] of PropertyDefinitionAssignment
PropertyValueAssignment	OPTIONAL SET[1:?] of PropertyValueAssignment
TimeIntervalAssignment	OPTIONAL SET[1:?] of TimeIntervalAssignment
Criteria	OPTIONAL MultiLingualStringSelect
ActivityAssignment	OPTIONAL SET[1:?] of ActivityAssignment
FrozenAssignment	OPTIONAL SET[1:?] of FrozenAssignment
RequirementAssignment	OPTIONAL SET[1:?] of RequirementAssignment

Table 43: "AlternatePartRelationship" Attributes

#### Attribute recommendations

- **Description:** the text or the set of texts that provide further information about the AlternatePartRelationship. The value of this attribute need not be specified. Use "Description" template.
- **Id:** stores the Identifier for the AlternatePartRelationship. The value of this attribute need not be specified. Use IdentifierString type.
- **Related:** Reference to an alternate Part.
- **RelationType:** the meaning of the relationship. Use ClassString type. Mandatory value: 'alternate'.

- **Criteria:** the word or set of words describing the requirements that are covered by both the base part and the alternate part and therefore are the basis for the statement regarding the capability of replacing the base part by the alternate part. Use "Description" template.
- Other attributes than these are not covered by these Recommended Practices; their use is discouraged as it would depend on mutual agreements between data exchange partners.

### 7.5.2 Template "AssemblyOccurrenceRelationshipSubstitution"

An AssemblyOccurrenceRelationshipSubstitution specifies that one NextAssemblyOccurrenceUsage may be substituted for another NextAssemblyOccurrenceUsage. This relationship is not symmetric: if the one NextAssemblyOccurrenceUsage is a substitution for another NextAssemblyOccurrenceUsage, this does not imply the other way around.

The subjects of the substitution are the related Occurrence objects (i.e. occurrence of parts) of both NextAssemblyOccurrenceUsage objects.

The relating AssemblyDefinition shall be the same in both NextAssemblyOccurrenceUsage objects.

Occurrence effectivities and the 3D placement associated to both NextAssemblyOccurrenceUsage objects should be identical or the substitute NextAssemblyOccurrenceUsage should have none of them.

In some PDM systems which relate the base NextAssemblyOccurrenceUsage directly to the substitute parts => there is only one NextAssemblyOccurrenceUsage and also no way to store properties on the substitute parts occurrences. In such a case, the properties should be the same or there should be none of them.

An AssemblyOccurrenceRelationshipSubstitution for which the first NextAssemblyOccurrenceUsage refers to an occurrence of a part which is an assembly involves that the entire part structure of the substituted part may be used in place of the first part and its part structure.

This concept usually refers to form, fit, function, and quality. Additional properties such as performance, noise, endurance, or reliability may also be considered as a prerequisite for the replacement.

#### **Preprocessor Recommendations:**

- The **relating** and the **related** NextAssemblyOccurrenceUsage shall be different objects.
- If the relation is symmetric in the source PDM system, then a reverse-relationship shall state that it applies in both directions
- If there are more than one substitute part involved, a 'star' structure from the base part to each substitute part shall be mapped (this star maps the semantic, that there is a base part and a number of substitute parts. All the substitute parts are on the same semantical level, but not on the same semantical level than the base part.
- The combination of the base Part and the substitute Part shall be unique.

#### **Postprocessor Recommendation:**

If the target system does not support AssemblyOccurrenceRelationshipSubstitution, but only AssemblyViewRelationshipSubstitution (see chapter 7.5.3), it shall check if the same substitution rule applies to all occurrences of the same component part within a given assembly part and map them as one instance of AssemblyViewRelationshipSubstitution. Otherwise, an error shall be returned and the AssemblyOccurrenceRelationshipSubstitutions shall be ignored.

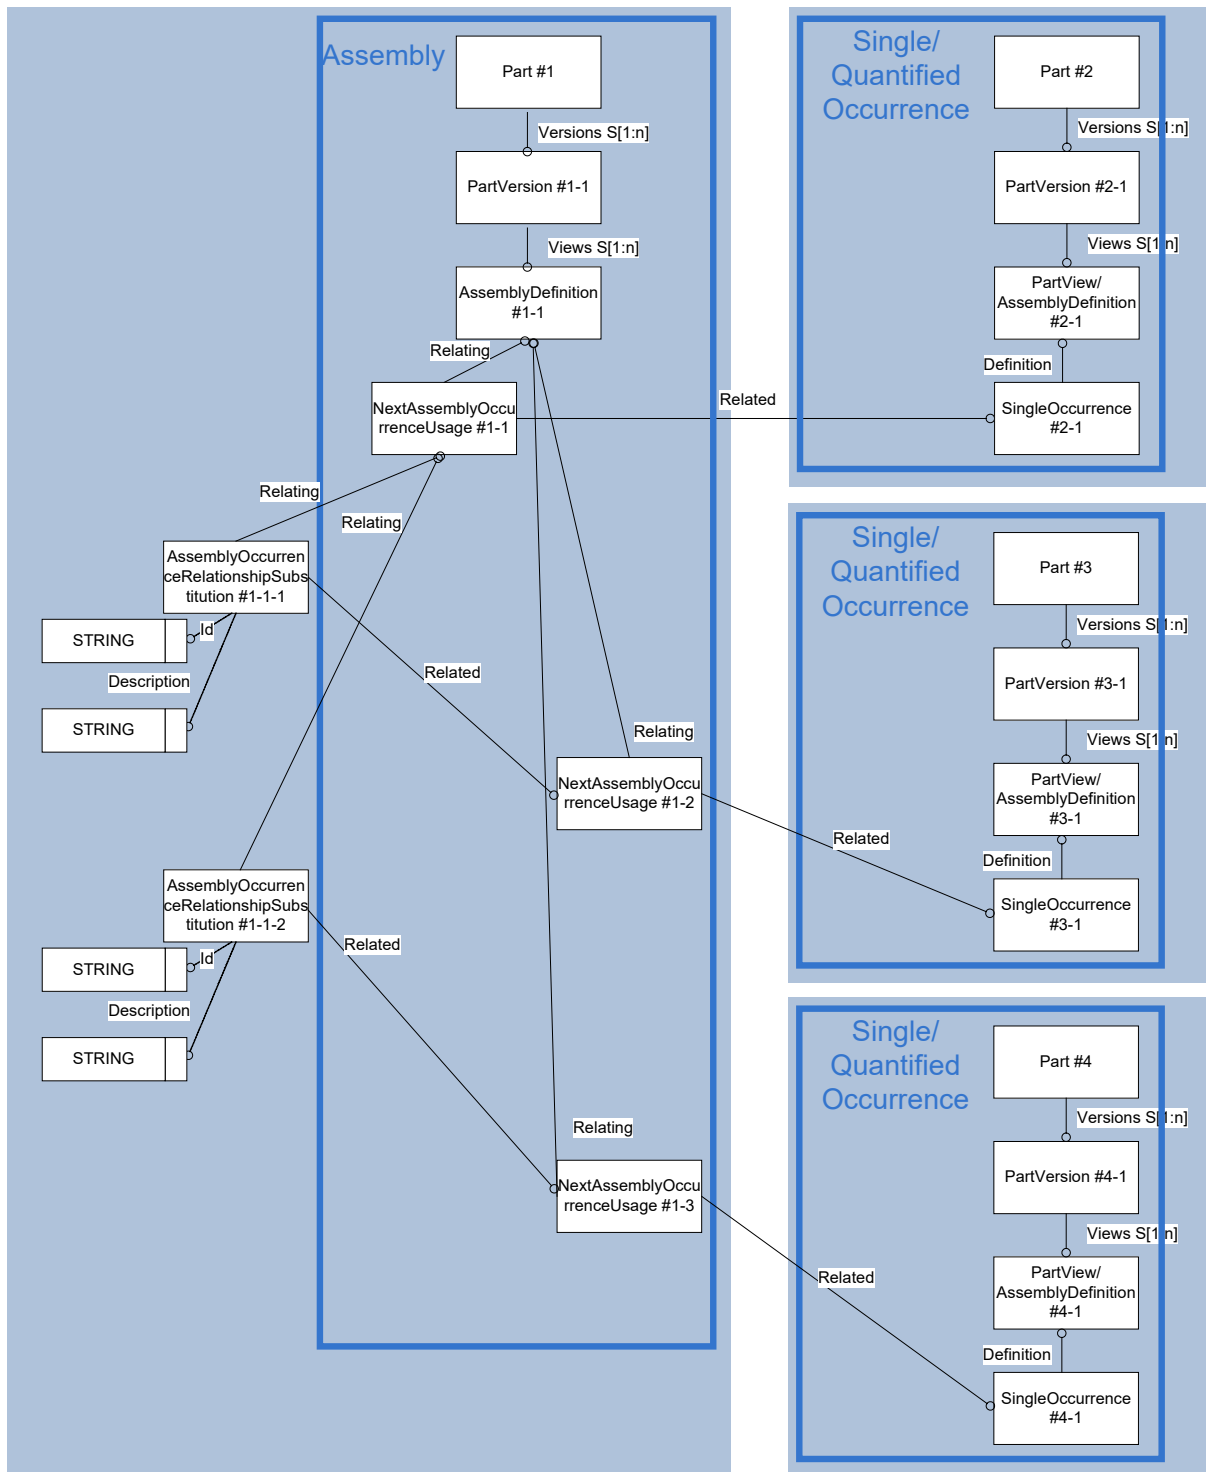


Figure 34: Template "AssemblyOccurrenceRelationshipSubstitution"

## The Instance Model: STEP exchange file format (ISO10303 AP242 BO Model XML syntax)

```

<Part uid="p--0000000017D374A0">
...
  <Versions>
    <PartVersion uid="pv--0000000017D374A0--id1">
...
      <Views>
        <PartView xsi:type="n0:AssemblyDefinition" uid="pvv--
0000000017D374A0--id1">
...
          <ViewOccurrenceRelationship uid="pvvid--000000001EB04CF0--10"
xsi:type="n0:NextAssemblyOccurrenceUsage">
...
            <AssemblyOccurrenceRelationshipSubstitution uid="aors--1">
              <Related uidRef="pvvid--0000000017D37010--11"/>
            </AssemblyOccurrenceRelationshipSubstitution>
          </ViewOccurrenceRelationship>
          <ViewOccurrenceRelationship uid="pvvid--0000000017D37010--11"
xsi:type="n0:NextAssemblyOccurrenceUsage">
...
            </ViewOccurrenceRelationship>
...
          <AssemblyType>
            <ClassString>design assembly</ClassString>
          </AssemblyType>
        </PartView>
      </Views>
...
    </PartVersion>
  </Versions>
</Part>

```

Entity AssemblyOccurrenceRelationshipSubstitution	Attribute type
ClassifiedAs	OPTIONAL SET[1:?] of Classification
Description	OPTIONAL DescriptorSelect
Id	OPTIONAL IdentifierSelect
Related	NextAssemblyOccurrenceUsage
ActivityAssignment	OPTIONAL SET[1:?] of ActivityAssignment
ApprovalAssignment	OPTIONAL SET[1:?] of ApprovalAssignment
DateAndPersonAssignment	OPTIONAL SET[1:?] of DateAndPersonAssignment
DateTimeAssignment	OPTIONAL SET[1:?] of DateTimeAssignment
DocumentAssignment	OPTIONAL SET[1:?] of DocumentAssignment
EffectivityAssignment	OPTIONAL SET[1:?] of EffectivityAssignment
EventAssignment	OPTIONAL SET[1:?] of EventAssignment
FrozenAssignment	OPTIONAL SET[1:?] of FrozenAssignment
InformationUsageRightAssignment	OPTIONAL SET[1:?] of InformationUsageRightAssignment



OrganizationOrPersonInOrganizationAssignment	OPTIONAL SET[1:?] of OrganizationOrPersonInOrganizationAssignment
PropertyDefinitionAssignment	OPTIONAL SET[1:?] of PropertyDefinitionAssignment
PropertyValueAssignment	OPTIONAL SET[1:?] of PropertyValueAssignment
RequirementAssignment	OPTIONAL SET[1:?] of RequirementAssignment
SecurityClassificationAssignment	OPTIONAL SET[1:?] of SecurityClassificationAssignment
TimeIntervalAssignment	OPTIONAL SET[1:?] of TimeIntervalAssignment

Table 44: "AssemblyOccurrenceRelationshipSubstitution" Attributes

### Attribute recommendations

- **Description:** the text or the set of texts that provide further information about the AssemblyOccurrenceRelationshipSubstitution. The value of this attribute need not be specified. Use "Description" template.
- **Id:** stores the Identifier for the AssemblyOccurrenceRelationshipSubstitution. The value of this attribute need not be specified. Use IdentifierString type.
- **Related:** Reference to a substitution NextAssemblyOccurrenceUsage.
- **PropertyValueAssignment:** adds the value of a property to the AssemblyOccurrenceRelationshipSubstitution. Use "PropertyAssignment" template (see 6.2)  
 The Bugzilla issue [#8183](#) has been created in order to support PropertyValueAssignment and PropertyDefinitionAssignment
- Other attributes than these are not covered by these Recommended Practices; their use is discouraged as it would depend on mutual agreements between data exchange partners.

### 7.5.3 Template "AssemblyViewRelationshipSubstitution"

An AssemblyViewRelationshipSubstitution specifies that one PartViewRelationship may be substituted for another PartViewRelationship. This relationship is not symmetric: if the one PartViewRelationship is a substitution for another PartViewRelationship, this does not imply the other way around.

The subjects of the substitution are the related View objects (i.e. applying to the usage (i.e. all occurrences) of a component part in a given assembly part) of both PartViewRelationship objects.

The relating AssemblyDefinition shall be the same in both PartViewRelationship objects.

View Effectivities associated to both PartViewRelationship objects should be identical or the substitute PartViewRelationship should have none of them.

In some PDM systems which relate the base NextAssemblyViewUsage directly to the substitute parts => there is only one NextAssemblyViewUsage and also no way to store properties on the substitute parts views. In such a case, the properties should be the same or there should be none of them.

An AssemblyViewRelationshipSubstitution for which the first PartViewRelationship refers to a usage of a part which is an assembly involves that the entire part structure of the substituted part may be used in place of the first part and its part structure.

This concept usually refers to form, fit, function, and quality. Additional properties such as performance, noise, endurance, or reliability may also be considered as a prerequisite for the replacement.

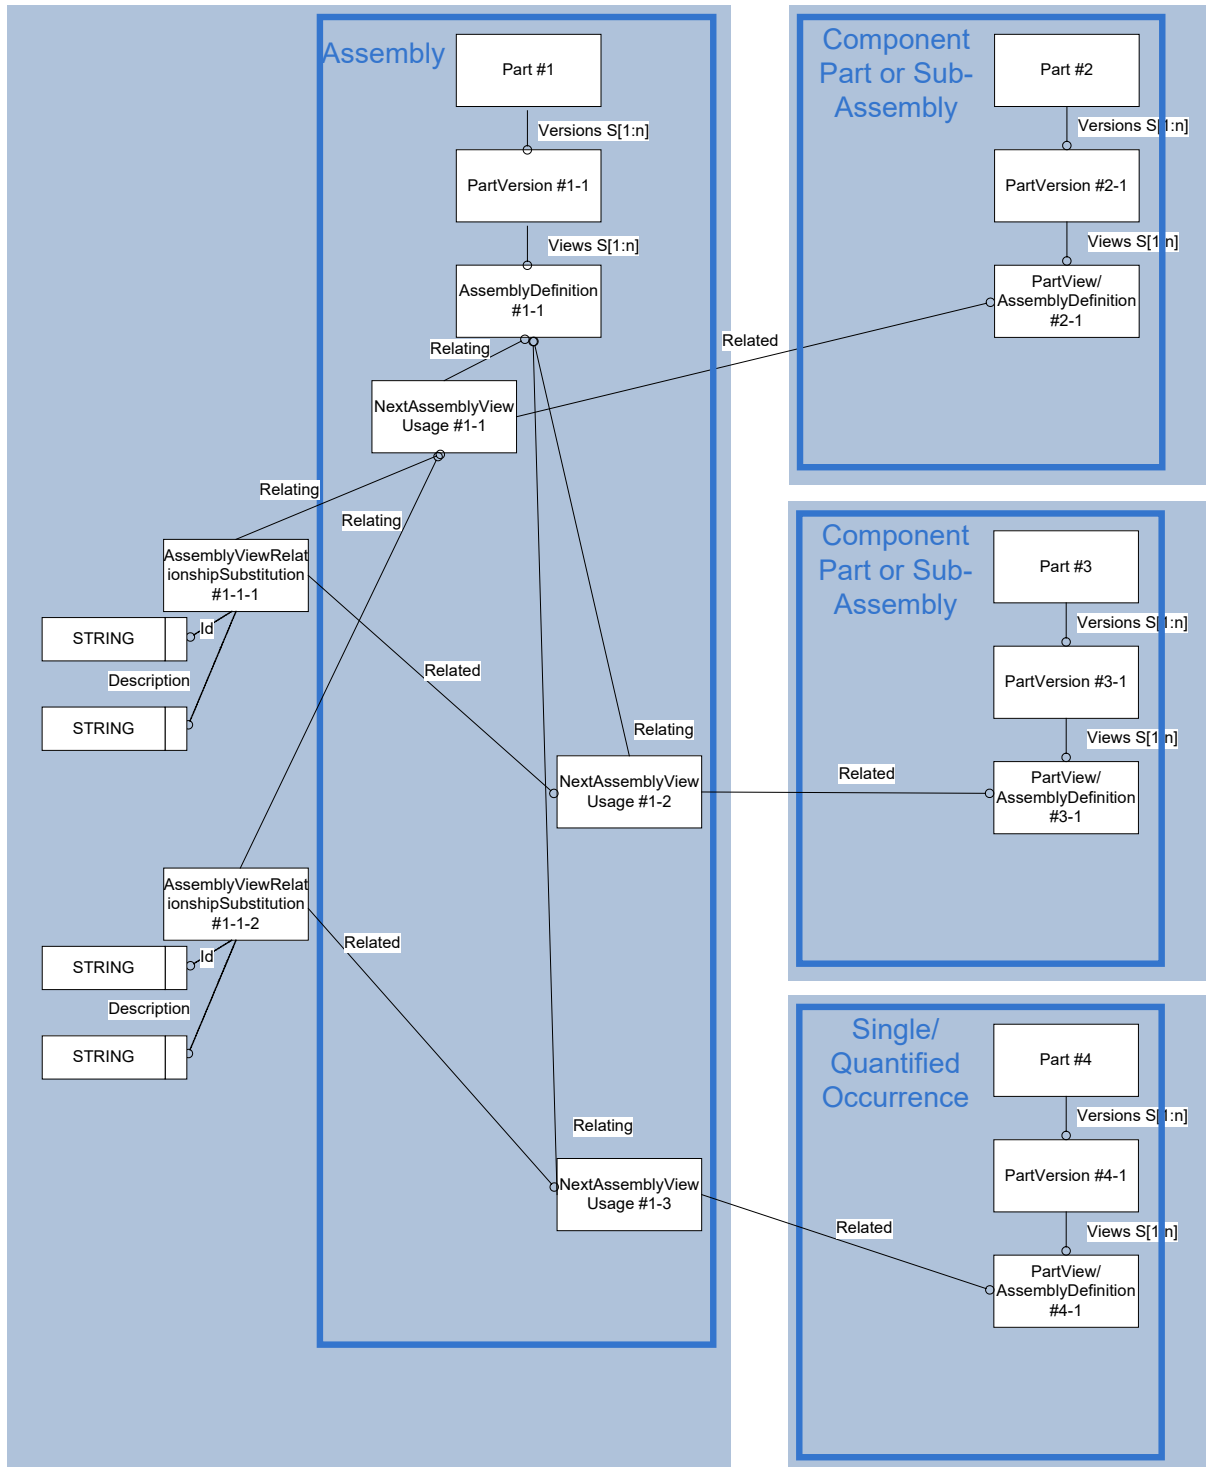


Figure 35: Template "AssemblyViewRelationshipSubstitution"

## The Instance Model: STEP exchange file format (ISO10303 AP242 BO Model XML syntax)

```

<Part uid="p--0000000017D374A0">
...
  <Versions>
    <PartVersion uid="pv--0000000017D374A0--id1">
...
      <Views>
        <PartView xsi:type="n0:AssemblyDefinition" uid="pvv--
0000000017D374A0--id1">
...
          <PartViewRelationship uid="pvvid--000000001EB04CF0--10"
xsi:type="n0:NextAssemblyViewUsage">
...
            <AssemblyViewRelationshipSubstitution uid="aors--1">
              <Related uidRef="pvvid--0000000017D37010--11"/>
            </AssemblyViewRelationshipSubstitution>
          </PartViewRelationship>
          <PartViewRelationship uid="pvvid--0000000017D37010--11"
xsi:type="n0:NextAssemblyViewUsage">
...
            </PartViewRelationship>
...
          <AssemblyType>
            <ClassString>design assembly</ClassString>
          </AssemblyType>
        </PartView>
      </Views>
...
    </PartVersion>
  </Versions>
</Part>

```

Entity AssemblyViewRelationshipSubstitution	Attribute type
ClassifiedAs	OPTIONAL SET[1:?] of Classification
Description	OPTIONAL DescriptorSelect
Id	OPTIONAL IdentifierSelect
Related	NextAssemblyViewUsage
ActivityAssignment	OPTIONAL SET[1:?] of ActivityAssignment
ApprovalAssignment	OPTIONAL SET[1:?] of ApprovalAssignment
DateAndPersonAssignment	OPTIONAL SET[1:?] of DateAndPersonAssign- ment
DateTimeAssignment	OPTIONAL SET[1:?] of DateTimeAssignment
DocumentAssignment	OPTIONAL SET[1:?] of DocumentAssignment
EffectivityAssignment	OPTIONAL SET[1:?] of EffectivityAssignment
EventAssignment	OPTIONAL SET[1:?] of EventAssignment
FrozenAssignment	OPTIONAL SET[1:?] of FrozenAssignment
InformationUsageRightAssignment	OPTIONAL SET[1:?] of InformationUs- ageRightAssignment

OrganizationOrPersonInOrganizationAssignment	OPTIONAL SET[1:?] of OrganizationOrPersonInOrganizationAssignment
PropertyDefinitionAssignment	OPTIONAL SET[1:?] of PropertyDefinitionAssignment
PropertyValueAssignment	OPTIONAL SET[1:?] of PropertyValueAssignment
RequirementAssignment	OPTIONAL SET[1:?] of RequirementAssignment
SecurityClassificationAssignment	OPTIONAL SET[1:?] of SecurityClassificationAssignment
TimeIntervalAssignment	OPTIONAL SET[1:?] of TimeIntervalAssignment

*Table 45: "AssemblyViewRelationshipSubstitution" Attributes*

### **Attribute recommendations**

- **Description:** the text or the set of texts that provide further information about the AssemblyViewRelationshipSubstitution. The value of this attribute need not be specified. Use "Description" template.
- **Id:** stores the Identifier for the AssemblyViewRelationshipSubstitution. The value of this attribute need not be specified. Use IdentifierString type.
- **Related:** Reference to a substitution NextAssemblyViewUsage.
- Other attributes than these are not covered by these Recommended Practices; their use is discouraged as it would depend on mutual agreements between data exchange partners.

### **Preprocessor Recommendation:**

- The relating and the related PartViewRelationships shall be different objects.
- If the relation is symmetric in the source PDM system, then a reverse-relationship shall state that it applies in both directions
- If there are more than one substitute part involved, a 'star' structure from the base part to each substitute part shall be mapped (this star maps the semantic, that there is a base part and a number of substitute parts. All the substitute parts are on the same semantical level, but not on the same semantical level than the base part.
- The combination of the base Part and the substitute Part shall be unique.
- The NextAssemblyViewUsage.RelationType shall be set to 'next assembly view' (see section 7.4).

### **Postprocessor Recommendation:**

If the target system does not support AssemblyViewRelationshipSubstitution, it shall duplicate it between all occurrences of the base Part usage and all occurrences of the substitute Part usage that are mentioned in the XML file and map each of them as AssemblyOccurrenceRelationshipSubstitution (see chapter 7.5.2).

## 7.6 Template “OccurrenceRelationship”

An OccurrenceRelationship is a relationship between two Occurrence objects.

Entity OccurrenceRelationship	Attribute type
ClassifiedAs	OPTIONAL SET[1:?] of Classification
Description	OPTIONAL DescriptorSelect
Id	OPTIONAL IdentifierSelect
Related	Occurrence
RelationType	ClassSelect
ActivityAssignment	OPTIONAL SET[1:?] of ActivityAssignment
ActivityMethodAssignment	OPTIONAL SET[1:?] of ActivityMethodAssignment
ApprovalAssignment	OPTIONAL SET[1:?] of ApprovalAssignment
CertificationAssignment	OPTIONAL SET[1:?] of CertificationAssignment
ConditionAssignment	OPTIONAL SET[1:?] of ConditionAssignment
DateAndPersonAssignment	OPTIONAL SET[1:?] of DateAndPersonAssignment
DateTimeAssignment	OPTIONAL SET[1:?] of DateTimeAssignment
DocumentAssignment	OPTIONAL SET[1:?] of DocumentAssignment
EffectivityAssignment	OPTIONAL SET[1:?] of EffectivityAssignment
EventAssignment	OPTIONAL SET[1:?] of EventAssignment
FrozenAssignment	OPTIONAL SET[1:?] of FrozenAssignment
InformationUsageRightAssignment	OPTIONAL SET[1:?] of InformationUsageRightAssignment
ModelPropertyAssignment	OPTIONAL SET[1:?] of ModelPropertyAssignment
OrganizationOrPersonInOrganizationAssignment	OPTIONAL SET[1:?] of OrganizationOrPersonInOrganizationAssignment
PropertyDefinitionAssignment	OPTIONAL SET[1:?] of PropertyDefinitionAssignment
PropertyValueAssignment	OPTIONAL SET[1:?] of PropertyValueAssignment
SecurityClassificationAssignment	OPTIONAL SET[1:?] of SecurityClassificationAssignment
TimeIntervalAssignment	OPTIONAL SET[1:?] of TimeIntervalAssignment
WorkRequestAssignment	OPTIONAL SET[1:?] of WorkRequestAssignment

Table 46: “OccurrenceRelationship” Attributes

### **Attribute recommendations**

- **Description:** the text or the set of texts that provide further information about the Assembly structure link. The value of this attribute need not be specified. Use "Description" template.
- **Id:** stores the Identifier for the OccurrenceRelationship. The value of this attribute need not be specified. Use IdentifierString type.
- **Related:** Reference to an Occurrence that is the consumed object in the relationship (example AsDesigned, and the Relating is the AsPlanned)
- **RelationType:** the meaning of the relationship. Use ClassString type. Mandatory value: 'tracking'.
- Other attributes than these are not covered by these Recommended Practices; their use is discouraged as it would depend on mutual agreements between data exchange partners.

**Preprocessor Recommendations:** None specified.

**Postprocessor Recommendations:** None specified.

**Related Entities:** There are no specific related entities.

### **The Instance Model: STEP exchange file format (ISO10303 AP242 BO Model XML syntax)**

Example with XML code of OccurrenceRelationship

```
<PartView uid="PV__39">
  <InitialContext uidRef="VC__9"/>
  <Occurrence uid="SO__46" xsi:type="n0:SingleOccurrence">
    <Id id="PROPELLER.1"/>
    <OccurrenceRelationship uid="PVR__600387">
      <Description>
        <CharacterString>Tracking objects usage</CharacterString>
      </Description>
      <Related uidRef="SO__229"/>
      <RelationType>
        <ClassString>tracking</ClassString>
      </RelationType>
    </OccurrenceRelationship>
  </Occurrence>
  ...
</PartView>
```

## 8 Document Identification and Classification

The scope of this section corresponds to sections 5 and 6 of the PDM Schema Usage Guide V4.3.

A Document in the context of ISO 10303-3001 is a managed document. This means, it is under revision control, and various representations of a document version may be distinguished. The DocumentVersion represents the minimum identification of a managed document under revision control. A document representation definition may optionally be associated with one or more constituent external files that make up the contents of the document.

Similar to Parts, the identification of Documents in the AP242 BO Model consists of three concepts:

- Document Master Identification:
  - Document identification has specific requirements to assign documents to other product data, and to optionally associate with the constituent external file(s) that make up a specific document representation view definition;
- Context Information,
  - Document identification has different context information than Part identification;
- Type Classification
  - Document identification has a different type classification than Part identification.

These three concepts are represented by attributes of the three elements of the Document template; see 8.1 for details.

An external file is not managed independently by the system - there is usually no revision control or any representation definitions of external files. Version identification may optionally be associated with an external file, but this is for information only and is not used for managed revision control.

If a file is under configuration control, it shall be represented as a constituent of a document definition view/representation. Thus, it is actually the managed document that is under direct configuration control; the file is only indirectly under configuration control. A change to the file results in a change to the managed document (i.e., a new version). The changed file becomes a constituent of a view/representation definition of the new document version. A simple external reference alone is not configuration controlled; it is just an external file reference to product data. See also 11.1 for association of unmanaged files.

Documents may be associated with product data in a specified role using DocumentAssignment to represent some relationship between a document and other elements of product data. Constraints may be specified on this association, in order to distinguish an applicable portion of an entire document or file in the association. This linkage may be made at the level of the base identification of the document, the document version, or the document representation view definition. The recommended level from which a document master should reference other product data is the document version. See chapter 0 for details.

The following types of data may in general be assigned to a Document in the context of ISO 10303-3001 to characterize it further:

- ActivityMethod, Approval, Certification, Contract, DateTimeString, Document, DocumentVersion, DocumentDefinition, File, Effectivity, InformationUsageRight, Project, RequirementView, SecurityClassification, and WorkRequest.

These recommended practices for assembly structures, however, only cover relationships to the following concepts:

- DateTimeString, Document, DocumentVersion, DocumentDefinition, File, and SecurityClassification.

For document classification the AP242 BO Model distinguishes – as for Parts - the following two approaches:

- Type classification
  - An identified document may be placed into one or several of the following categories: 'catalogue', 'manual' or 'specification'. These values are set in the attribute Document.DocumentTypes; see 8.1.1 .
- General classification
  - Documents may need to be classified according to a classification system with explicit reference to classification criteria and related properties. For example, design documents may be classified according to level of design and to type of product. Such classification is enabled by the attribute Document.ClassifiedAs; see 8.1.1 . Thus, a Document may be linked to an extensive and already existing classification system.

### **8.1 Template “Document”**

The Document template supports – similar to the Part template (see 5.1) - the ability to uniquely identify a Document, its meta data and its properties. It consists in the AP242 BO Model of three structurally distinct data types as also shown in Figure 36:

- Document,
- DocumentVersion and,
- DocumentDefinition.

The general recommendations given for Part identification apply also to the Document identification, except where differences are noted.

Base document identification is always associated with at least one document version. Multiple document versions of a base document identification may be related together to represent document version history.

DocumentDefinition is used to define a view of a particular representation of a document version. A document version does not have to have an associated document representation definition.

The view definition of a document version is used for association of document properties, to build document structures, and to associate a document with the set of constituent external files that make it up.

Document, DocumentVersion and DocumentDefinition shall be written to the XML-file using containment. The information elements in the white area on the left side of Figure 36 are root elements and are, thus, outside of this containment block.



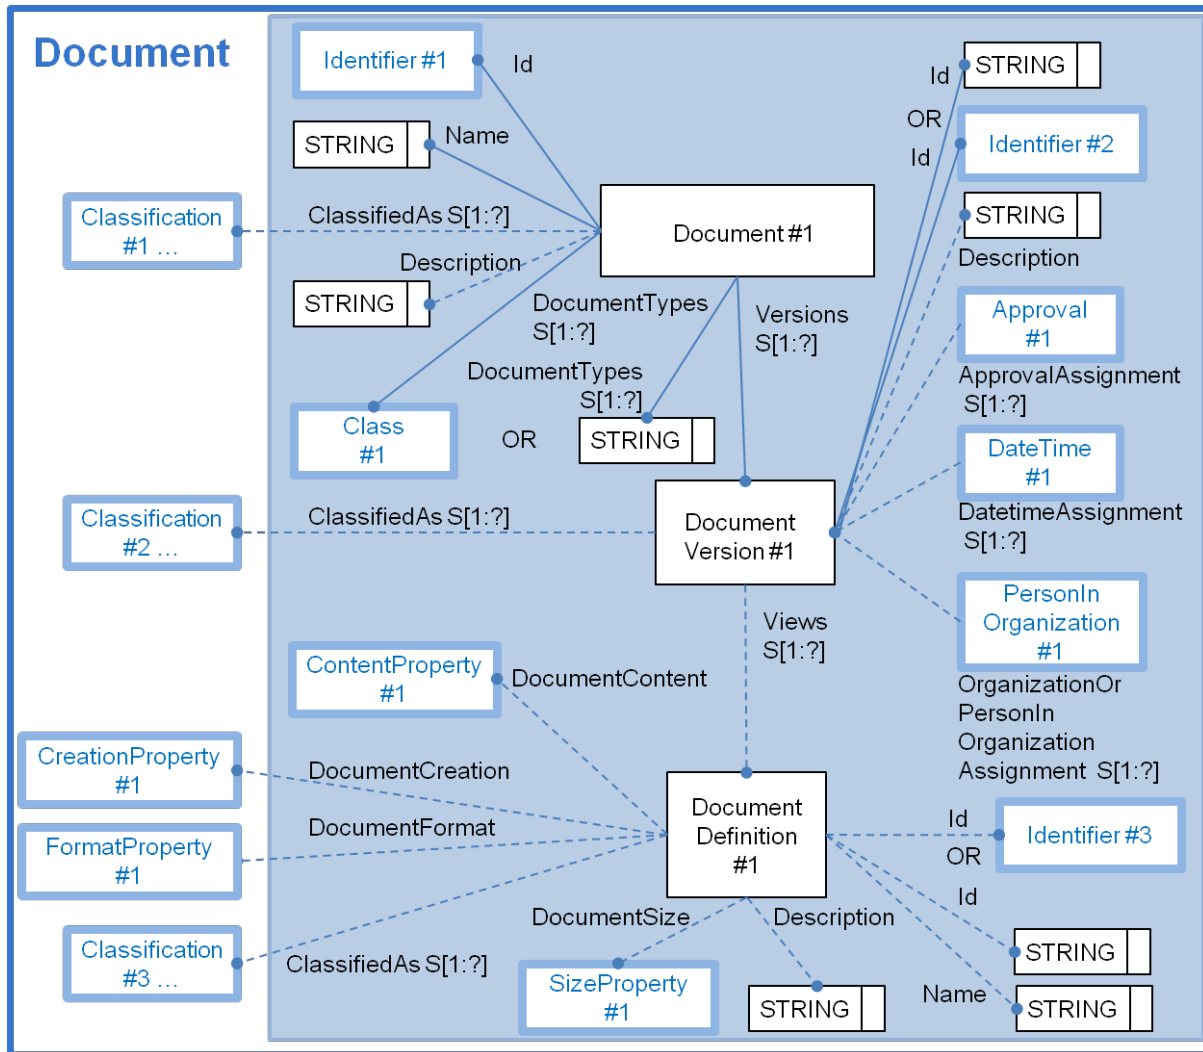


Figure 36: Template "Document"

### 8.1.1 Document

The Document entity represents the document master base information. This entity collects all information that is common among the different versions and views of the document. The document number is strictly an identifier. It should not be used as a 'smart string' with some parseable internal coding scheme, e.g., to identify version or classification information.

The Document number identifier shall be unique within the scope of the business process of the information exchange. This is typically not a problem when the Document is only used within a single company. For external use, the identification must be interpreted as unique within that broader domain. Processors may need to evaluate more than one string (i.e., more than only Document.id) to establish unique identification of the Document. The "Identifier" template provides a combination of parameters including Identifier.idRoleRef and Identifier.idContextRef that make Document identification unique.

The following XML-snippet is an example from a physical file that is in accordance to Figure 36.

## The Instance Model: STEP exchange file format (ISO10303 AP242 BO Model XML syntax)

```
<Document uid="doc--000000001EAAE870">
  <DocumentTypes>
    <ClassString>geometry</ClassString>
  </DocumentTypes>
  <Id>
    <Identifier uid="docid--000000001EAAE870--id7" id="nut" idRoleRef=",,rl--ii" idContextRef="o--000000178"/>
  </Id>
  <Name>
    <CharacterString>/NULL</CharacterString>
  </Name>
  <Versions>
    <DocumentVersion uid="dv--000000001EAAE870">
      <Id id="/NULL"/>
      <Views>
        <DocumentDefinition uid="ddd--000000001EAAE870" xsi:type="n0:DigitalDocumentDefinition">
          <Id id="/NULL"/>
          <Files>
            <DigitalFile uidRef="df--000000001EAAE870"/>
          </Files>
        </DocumentDefinition>
      </Views>
    </DocumentVersion>
  </Versions>
</Document>
```

Entity Document attributes	Attribute type
ClassifiedAs	OPTIONAL SET[1:?] of Classification
Description	OPTIONAL DescriptorSelect
DocumentTypes	SET[1:?] of ClassSelect
Id	IdentifierSelect
Name	DescriptorSelect
SameAs	OPTIONAL SET[1:?] of ProxySelect
Versions	SET[1:?] of DocumentVersion
ActivityAssignment	OPTIONAL SET[1:?] of ActivityAssignment
ActivityMethodAssignment	OPTIONAL SET[1:?] of ActivityMethodAssignment
ApprovalAssignment	OPTIONAL SET[1:?] of ApprovalAssignment
CertificationAssignment	OPTIONAL SET[1:?] of CertificationAssignment
ContractAssignment	OPTIONAL SET[1:?] of ContractAssignment
DateAndPersonAssignment	OPTIONAL SET[1:?] of DateAndPersonAssignment
DatetimeAssignment	OPTIONAL SET[1:?] of DateTimeAssignment
DocumentAssignment	OPTIONAL SET[1:?] of DocumentAssignment
DocumentRelationship	OPTIONAL SET[1:?] of DocumentRelationship

Entity Document attributes	Attribute type
EffectivityAssignment	OPTIONAL SET[1:?] of EffectivityAssignment
EventAssignment	OPTIONAL SET[1:?] of EventAssignment
FrozenAssignment	OPTIONAL SET[1:?] of FrozenAssignment
InformationUsageRightAssignment	OPTIONAL SET[1:?] of InformationUsageRightAssignment
OrganizationOrPersonInOrganizationAssignment	OPTIONAL SET[1:?] of OrganizationOrPersonInOrganizationAssignment
ProjectAssignment	OPTIONAL SET[1:?] of ProjectAssignment
RequirementAssignment	OPTIONAL SET[1:?] of RequirementAssignment
SecurityClassificationAssignment	OPTIONAL SET[1:?] of SecurityClassificationAssignment
SuppliedObjectRelationship	OPTIONAL SET[1:?] of SuppliedObjectRelationship
TimeIntervalAssignment	OPTIONAL SET[1:?] of TimeIntervalAssignment
WorkRequestAssignment	OPTIONAL SET[1:?] of WorkRequestAssignment

Table 47: "Document" Attributes

**Attribute recommendations**

- **ClassifiedAs:** the classifications of the Document. The value of this attribute need not be specified. Use "Classification" template (see 4.6.5 ).
- **Description:** an expanded name or text that provides further information about the Document. The value of this attribute need not be specified. Use Description template (see 4.6.7).
- **DocumentTypes:** the category of a Document. Use ClassString type if one of the values below is used, otherwise use "Class" template (see 4.6.4). As defined in the ISO AP242 specification. When applicable, the value of this element shall be one or several of the following:

DocumentTypes	Explanation
'catalogue'	the Document is the catalogue in which the associated object is listed
'manual'	the Document is the handbook that is supplied for the associated object
'specification'	the Document specifies the considerations that lead to the design finally chosen for the associated object
'primary geometry'	The document file represents one or many shape models in the highest quality available for this part
'secondary geometry'	The document file represents one of many shape models in a format derived from the primary geometry, for example a standard format or a tessellated format or only the external shape (without inner geometry)

DocumentTypes	Explanation
'NC data'	The document file represents numerical control data
'FE data'	The document file represents finite element data
'sample data'	The document file represents measured data
'process plan'	The document file represents process planning data
'check plan'	The document file represents quality control planning data
'drawing'	The document file represents a technical drawing
'structured product data'	The document file contains product meta data and data related to product structure. This value shall be used for nested external references, when the referenced document relates to another BO Model XML file (see section 9.3)

- **Id:** the identifier or set of identifiers for the Document, the document number. The referenced Identifier element shall have valid values for elements Identifier.idRoleRef and Identifier.idContextRef. Use “Identifier” template (see 4.6.6).
- **Name:** the words or set of words by which the Document is known. Use “Description” template (see 4.6.7).
- **Versions:** the related releases of the Document; a Document shall have at least one DocumentVersion.
- Other attributes than these are not covered by these Recommended Practices; their use is discouraged as it would depend on mutual agreements between data exchange partners.

**Preprocessor Recommendation:**

A part shall have at most one Document of type ‘primary geometry’. In most cases, this will be the native CAD geometry. A part may have none or many Documents of type ‘secondary geometry’; for example one containing a standard format, one containing the tessellated geometry, one containing only the external shape, etc...

What ‘primary’ and ‘secondary’ actually means is defined by the originating PDM system. There are exchange scenarios where only ‘secondary geometry’ will be exchanged, e.g. when for a Part where the native (‘primary’) is available in the sending system, only a derived format is sent to a supplier or customer.

**Postprocessor Recommendation:**

Documents of type ‘primary geometry’ and ‘secondary geometry’ are alternates to define the part, while all the other document types (‘drawing’, ‘specification’...) are complementary to the geometry.

If the postprocessor has to choose one geometry to process (for example CAD processors), ‘primary geometry’ shall be the first choice. If no primary, but only secondary geometry is provided, the secondary shall be chosen. Remark: It is not recommended to rely on PartView.DefiningGeometry to find the primary geometry, since it is optional.

**8.1.2 DocumentVersion**

A DocumentVersion is a release of a Document. It represents the identification of a specific version of the base Document identification. A particular DocumentVersion is always related to exactly one Document. This is why, in XML, it is embedded within a Document element.

**Preprocessor Recommendations:**

- Though not required, it is recommended to assign at least one view definition to each document version. A valid exception to this general rule is the exchange of versions that represent an entire version history; in this case only the most recent version is required to have an associated view definition.
- For the purpose of the typical PDM data exchange use case of these recommended practices, multiple versions of each document and multiple DigitalDocumentDefinitions of each version may be exchanged.

An example of DocumentVersion instantiation is in the XML-snippet in section 8.1.1.

Entity DocumentVersion attributes	Attribute type
ClassifiedAs	OPTIONAL SET[1:?] of Classification
Description	OPTIONAL DescriptorSelect
Id	IdentifierSelect
SameAs	OPTIONAL SET[1:?] of ProxySelect
Views	OPTIONAL SET[1:?] of DocumentDefinition
ActivityAssignment	OPTIONAL SET[1:?] of ActivityAssignment
ActivityMethodAssignment	OPTIONAL SET[1:?] of ActivityMethodAssignment
ApprovalAssignment	OPTIONAL SET[1:?] of ApprovalAssignment
CertificationAssignment	OPTIONAL SET[1:?] of CertificationAssignment
ContractAssignment	OPTIONAL SET[1:?] of ContractAssignment
DateAndPersonAssignment	OPTIONAL SET[1:?] of DateAndPersonAssignment
DatetimeAssignment	OPTIONAL SET[1:?] of DateTimeAssignment
DocumentAssignment	OPTIONAL SET[1:?] of DocumentAssignment
DocumentVersionRelationship	OPTIONAL SET[1:?] of DocumentVersionRelationship
EffectivityAssignment	OPTIONAL SET[1:?] of EffectivityAssignment
EventAssignment	OPTIONAL SET[1:?] of EventAssignment
FrozenAssignment	OPTIONAL SET[1:?] of FrozenAssignment
InformationUsageRightAssignment	OPTIONAL SET[1:?] of InformationUsageRightAssignment
OrganizationOrPersonInOrganizationAssignment	OPTIONAL SET[1:?] of OrganizationOrPersonInOrganizationAssignment
ProjectAssignment	OPTIONAL SET[1:?] of ProjectAssignment
RequirementAssignment	OPTIONAL SET[1:?] of RequirementAssignment
SecurityClassificationAssignment	OPTIONAL SET[1:?] of SecurityClassificationAssignment
SuppliedObjectRelationship	OPTIONAL SET[1:?] of SuppliedObjectRelationship
TimeIntervalAssignment	OPTIONAL SET[1:?] of TimeIntervalAssignment
WorkRequestAssignment	OPTIONAL SET[1:?] of WorkRequestAssignment

*Table 48: "DocumentVersion" Attributes*

## Attribute recommendations

- **ActivityAssignment:** the Activities associated to the DocumentVersion. The value of this attribute need not be specified. Use "Activity" template (see Recommended Practices for AP242 XML Change Management).
- **ApprovalAssignment:** the level of acceptance of the DocumentVersion. The value of this attribute need not be specified. Use "Approval" template (see 4.6.12).
- **ClassifiedAs:** the classifications of the DocumentVersion. The value of this attribute need not be specified. Use "Classification" template (see 4.6.5).
- **DatetimeAssignment:** the date and time of the creation or update of the DocumentVersion. The value of this attribute need not be specified. Use "DateTime" template (see 4.6.11).
- **Description:** the reason for the creation of the version. The value of this attribute need not be specified. Use "Description" template (see 4.6.7).
- **Id:** the identifier or set of identifiers for the DocumentVersion, the document version number. Use IdentifierString type or "Identifier" template (see 4.6.6).
  - **Preprocessor Recommendations:** If an organization does not version documents, it is recommended that the id attribute contains the string '/NULL' to indicate that no version information is relevant or intended. In this case only a single DocumentVersion shall be assigned to the Document.
  - **Postprocessor Recommendations:** If the value of the id attribute for a DocumentVersion is the string '/NULL', postprocessors should use this as an indication that the sending system or business process does not support versioning of Documents.
- **DocumentVersionRelationship:** a DocumentVersion of the same Document or of a different Document with a specific relation to the DocumentVersion according to the DocumentVersionRelationship.RelationType attribute. The value of this attribute need not be specified. Use "DocumentVersionRelationship" template (see 8.3).
- **OrganizationOrPersonInOrganizationAssignment:** an organization or person in organization with a specific relation to the DocumentVersion according to the OrganizationOrPersonInOrganizationAssignment.role attribute. The value of this attribute need not be specified. Use "PersonInOrganization" template (see 4.6.14).
- **Views:** the set of DocumentDefinition objects defined for the DocumentVersion.
  - In general, each DocumentVersion is recommended to have an associated DocumentDefinition representing one of its view definitions. In restricted cases, a DocumentVersion without a definition may be used to enhance information about another related, fully defined version. In the following specific case a DocumentVersion may be exchanged without an associated DocumentDefinition:
    - When version history (sequence relationship) is represented - only the most recent version is required to have an assigned DocumentDefinition. If there is no DocumentDefinition associated with the previous versions, only basic information about the sequence of previous versions is exchanged as additional information about the current DocumentVersion that is the focus of the data exchange.
- Other attributes than these are not covered by these Recommended Practices; their use is discouraged as it would depend on mutual agreements between data exchange partners.

### 8.1.3 DocumentDefinition

The DocumentDefinition entity denotes the definition of a particular view of a representation of a DocumentVersion. There may be more than one document representation definition associated with a single document version. The representation view definition of a document version is used for association of document properties, to build document structures, and to associate a document with the set of constituent external files that make it up. The entity DocumentDefinition supports property association and document structure. The subtype DigitalDocumentDefinition is used to associate a representation of a document version with the set of constituent files that make it up. See chapter 8.2 for identification of external files and for associating external files to documents.

#### **Preprocessor Recommendations:**

- The use of DocumentDefinition entities is not strictly required by rules in the AP242 BO Model, but it is strongly recommended. All DocumentVersion entities should always have at least one associated DocumentDefinition, except in the case of the exchange of pure version history information.
- If a PDM system does not distinguish between DocumentVersion and DocumentDefinition, only one DocumentDefinition shall be mapped (having id as unset).

#### **Postprocessor Recommendations:**

- the general behavior for evaluating ContentProperty, CreationProperty, FormatProperty and SizeProperty shall be 'only for information', and shall not cause the postprocessor to stop processing if the given content, creation system, format or size is not supported by the postprocessor. The postprocessor shall load and import the files correctly.

An example of a DocumentDefinition instantiation is in the XML-snippet in section 8.1.1 .

Entity (Digital)DocumentDefinition attributes	Attribute type
ClassifiedAs	OPTIONAL SET[1:?] of Classification
Description	OPTIONAL DescriptorSelect
DocumentContent	OPTIONAL ContentProperty
DocumentCreation	OPTIONAL CreationProperty
DocumentFormat	OPTIONAL SET[1:?] OF FormatProperty
DocumentSize	OPTIONAL SizeProperty
Id	OPTIONAL IdentifierSelect
InZone	OPTIONAL SET[1:?] of InZone
Name	OPTIONAL DescriptorSelect
SameAs	OPTIONAL SET[1:?] of ProxySelect
ActivityAssignment	OPTIONAL SET[1:?] of ActivityAssignment
ActivityMethodAssignment	OPTIONAL SET[1:?] of ActivityMethodAssignment
ApprovalAssignment	OPTIONAL SET[1:?] of ApprovalAssignment
BreakdownVersionAssignment	OPTIONAL SET[1:?] of BreakdownVersionAssignment
DateAndPersonAssignment	OPTIONAL SET[1:?] of DateAndPersonAssignment



Entity (Digital)DocumentDefinition attributes	Attribute type
DatetimeAssignment	OPTIONAL SET[1:?] of DateTimeAssignment
DocumentAssignment	OPTIONAL SET[1:?] of DocumentAssignment
DocumentDefinitionRelationship	OPTIONAL SET[1:?] of DocumentDefinitionRelationship
EffectivityAssignment	OPTIONAL SET[1:?] of EffectivityAssignment
EventAssignment	OPTIONAL SET[1:?] of EventAssignment
FrozenAssignment	OPTIONAL SET[1:?] of FrozenAssignment
InformationUsageRightAssignment	OPTIONAL SET[1:?] of InformationUsageRightAssignment
ModelPropertyAssignment	OPTIONAL SET[1:?] of ModelPropertyAssignment
OrganizationOrPersonInOrganizationAssignment	OPTIONAL SET[1:?] of OrganizationOrPersonInOrganizationAssignment
PropertyDefinitionAssignment	OPTIONAL SET[1:?] of PropertyDefinitionAssignment
PropertyValueAssignment	OPTIONAL SET[1:?] of PropertyValueAssignment
RequirementAssignment	OPTIONAL SET[1:?] of RequirementAssignment
SecurityClassificationAssignment	OPTIONAL SET[1:?] of SecurityClassificationAssignment
SuppliedObjectRelationship	OPTIONAL SET[1:?] of SuppliedObjectRelationship
TimeIntervalAssignment	OPTIONAL SET[1:?] of TimeIntervalAssignment
WorkRequestAssignment	OPTIONAL SET[1:?] of WorkRequestAssignment
(only for DigitalDocumentDefinition) Files	OPTIONAL SET[1:?] of DigitalFiles

Table 49: "(Digital)DocumentDefinition" Attributes

#### Attribute recommendations

- **ClassifiedAs:** the classifications of the DocumentDefinition. The value of this attribute does not need to be specified. Use "Classification" template (see 4.6.5).
- **Description:** text or the set of texts that provide further information about the DocumentDefinition. The value of this attribute does not need to be specified. Use "Description" template (see 4.6.7).
- **DocumentContent:** the characteristics of the content of the document represented by DocumentDefinition. The value of this attribute does not need to be specified. Use "ContentProperty" template (see 10.2).
- **DocumentCreation:** further details of the creation of the document represented by DocumentDefinition. The value of this attribute does not need to be specified. Use "CreationProperty" template (see 10.3).
- **DocumentFormat:** the format of the document represented by DocumentDefinition. The value of this attribute does not need to be specified. Use "FormatProperty" template (see 10.1).




- **DocumentSize:** the size of the document represented by DocumentDefinition. The value of this attribute need not be specified. Use “SizeProperty” template (see 10.4).
- **Id:** the identifier or set of identifiers for the DocumentDefinition. The value of this attribute need not be specified. Use IdentifierString type or “Identifier” template (see 4.6.6).
  - **Preprocessor Recommendations:** There is no standard mapping for the id attribute of DocumentDefinition; however, the value should be unique relative to other DocumentDefinitions related to the same DocumentVersion. The id attribute shall not be 'overloaded' to include, for example, life-cycle or organizational information; this is generally not recommended for the AP242 BO Model. This attribute should contain a unique identifier for the DocumentDefinition - no additional semantics are associated with this attribute.
  - **Postprocessor Recommendations:** Postprocessors do not need to expect any semantics from the id attribute; it is a pure identifying string. The id value – possibly composed of several values according to the “Identifier” template - should be unique relative to other the identifiers of other DocumentDefinition related to the same DocumentVersion.
- **Name:** the words or set of words by which the DocumentDefinition is known. The value of this attribute need not be specified. Use “Description” template (see 4.6.7).
- **DocumentDefinitionRelationship:** to relate to another document. Use the “DocumentDefinitionRelationship” template (see 8.2).
- **PropertyValueAssignment:** to assign a PropertyValue to the DocumentDefinition. Use the “DocumentFileProperty” template (see 10.5).
- **Files** (in case of DigitalDocumentDefinition): to assign one or many DigitalFiles to the DocumentDefinition. Use the “DigitalFile” template (see 9.1).


**Remark: it is recommended to assign only one file here, in order to manage the versioning of each of them as a distinct document within the PDM system. In case of model splitting or alternate models, please refer to the special cases explained in 11.2.**
- Other attributes than these are not covered by these Recommended Practices; their use is discouraged as it would depend on mutual agreements between data exchange partners.

## 8.2 Template “DocumentDefinitionRelationship”

This relationship enables to relate two DocumentDefinitions of the same document version:

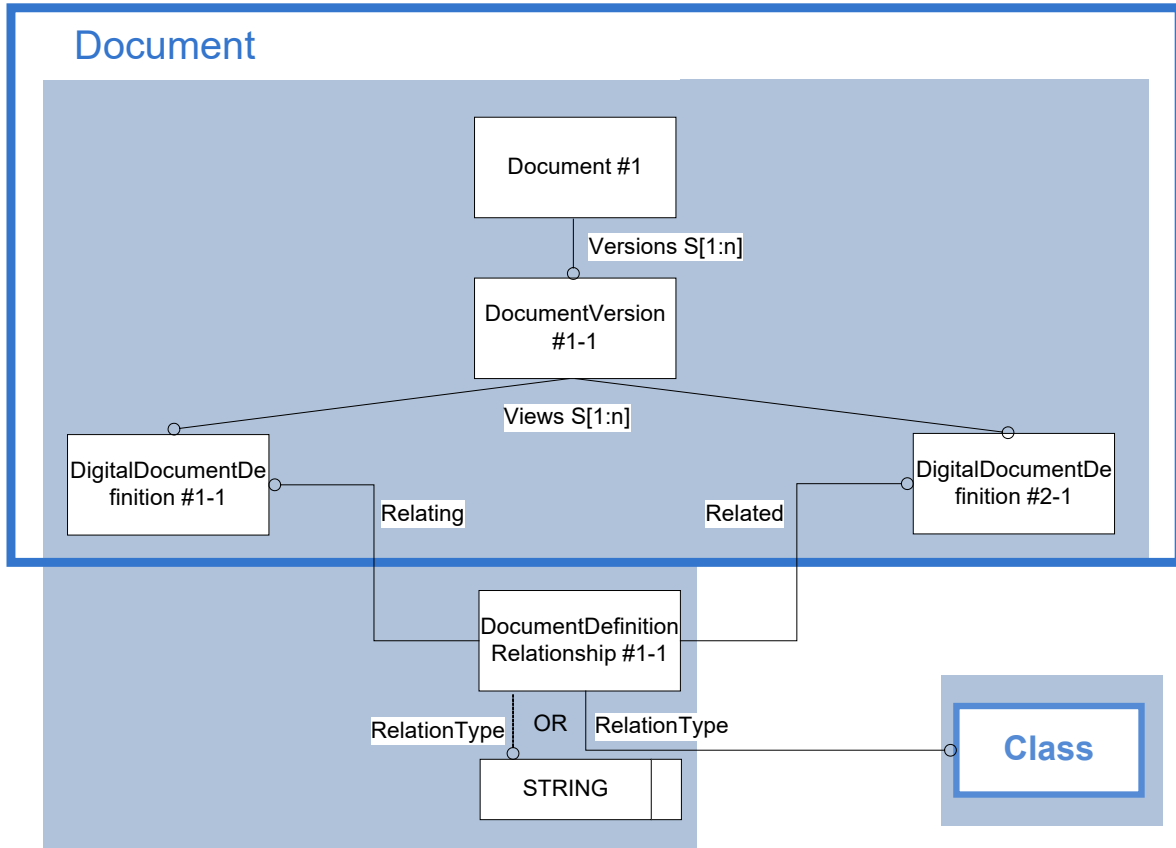

or of different document versions:

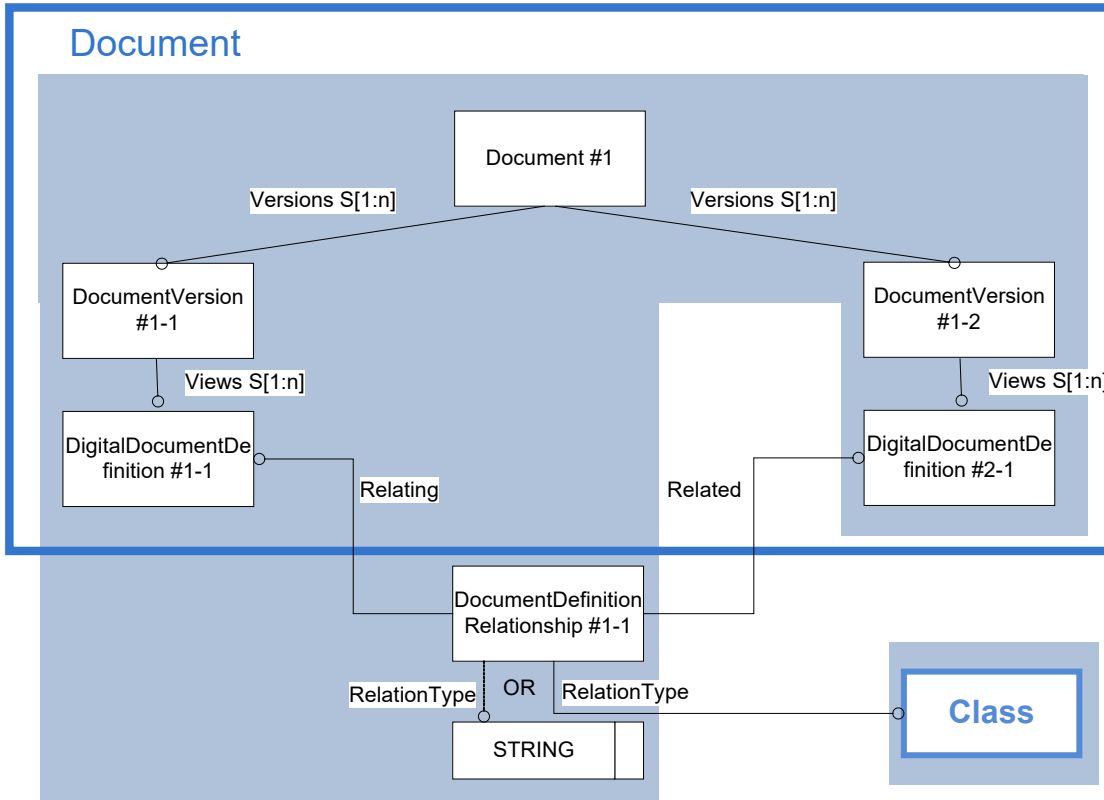

or of different documents:

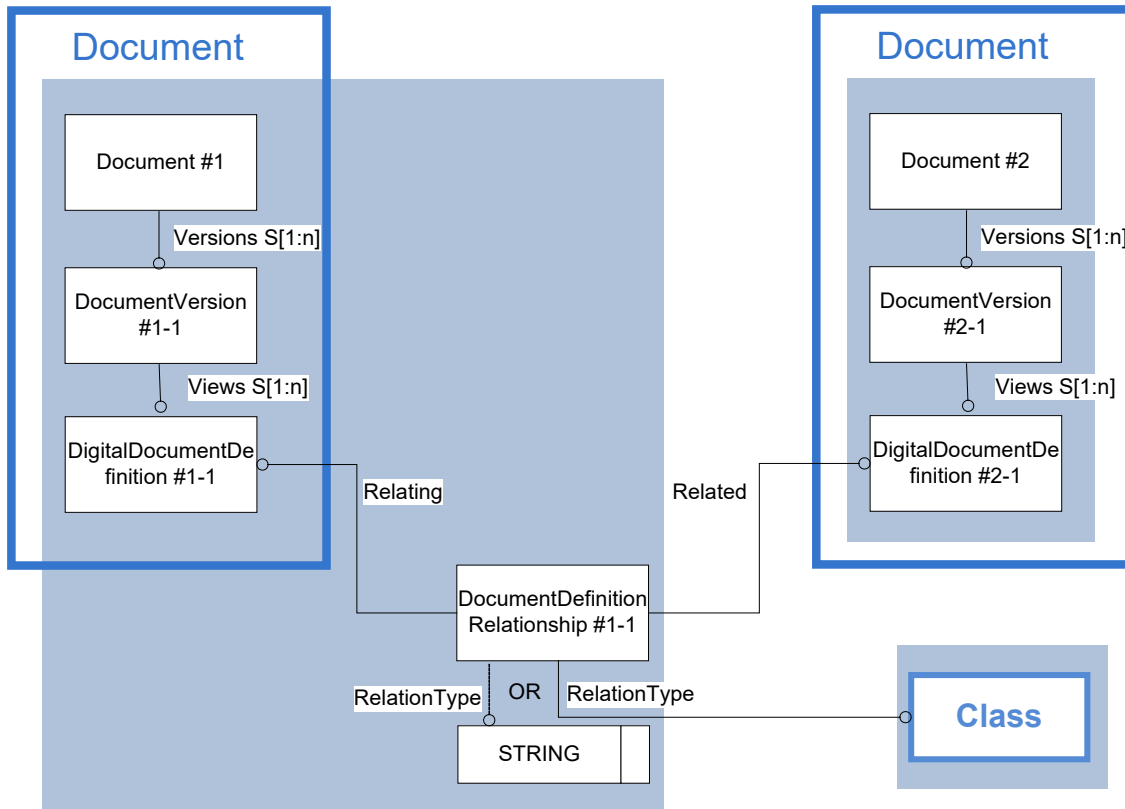


Figure 37: Template "DocumentDefinitionRelationship"

### The Instance Model: STEP exchange file format (ISO10303 AP242 BO Model XML syntax)

```

<Document uid="doc--000000001EB04CF0">
...
  <Id>
    <Identifier uid="docid--000000001EB04CF0--id2" id="plate" idRoleRef=",,rl--ii" idContextRef="o--000000178"/>
  </Id>
...
  <Versions>
    <DocumentVersion uid="dv--000000001EB04CF0">
...
      <Id id="A.1"/>
      <Views>
        <DigitalDocumentDefinition uid="ddd--000000001EB04CF0" xsi:type="n0:DigitalDocumentDefinition">
          <Id id="/NULL"/>
          <DocumentDefinitionRelationship uid="ddr--1">
            <Related uidRef="ddd--000000001EB04CF0--2"/>
            <RelationType>
              <ClassString>sequence</ClassString>
            </RelationType>
          </DocumentDefinitionRelationship>
...
        </DigitalDocumentDefinition>
        <DigitalDocumentDefinition uid="ddd--000000001EB04CF0--2"
xsi:type="n0:DigitalDocumentDefinition">
          <Id id="/NULL"/>
...
        </DigitalDocumentDefinition>
      </Views>
    </DocumentVersion>
  </Versions>

```

```
...
  </DocumentVersion>
</Versions>
</Document>
```

Entity DocumentDefinitionRelationship attributes	Attribute type
ClassifiedAs	OPTIONAL SET[1:?] of Classification
Description	OPTIONAL DescriptorSelect
Id	IdentifierSelect
Related	DocumentDefinition
RelationType	ClassSelect
ActivityAssignment	OPTIONAL SET[1:?] of ActivityAssignment
ActivityMethodAssignment	OPTIONAL SET[1:?] of ActivityMethodAssignment
ApprovalAssignment	OPTIONAL SET[1:?] of ApprovalAssignment
CertificationAssignment	OPTIONAL SET[1:?] of CertificationAssignment
ConditionAssignment	OPTIONAL SET[1:?] of ConditionAssignment
DateAndPersonAssignment	OPTIONAL SET[1:?] of DateAndPersonAssignment
DatetimeAssignment	OPTIONAL SET[1:?] of DateTimeAssignment
DocumentAssignment	OPTIONAL SET[1:?] of DocumentAssignment
EffectivityAssignment	OPTIONAL SET[1:?] of EffectivityAssignment
EventAssignment	OPTIONAL SET[1:?] of EventAssignment
FrozenAssignment	OPTIONAL SET[1:?] of FrozenAssignment
InformationUsageRightAssignment	OPTIONAL SET[1:?] of InformationUsageRightAssignment
ModelPropertyAssignment	OPTIONAL SET[1:?] of ModelPropertyAssignment
OrganizationOrPersonInOrganizationAssignment	OPTIONAL SET[1:?] of OrganizationOrPersonInOrganizationAssignment
PropertyDefinitionAssignment	OPTIONAL SET[1:?] of PropertyDefinitionAssignment
PropertyValueAssignment	OPTIONAL SET[1:?] of PropertyValueAssignment
TimeIntervalAssignment	OPTIONAL SET[1:?] of TimeIntervalAssignment
WorkRequestAssignment	OPTIONAL SET[1:?] of WorkRequestAssignment

Table 50: "DocumentDefinitionRelationship" Attributes

### Attribute recommendations


- **RelationType**: the meaning of the relationship. Use ClassString type if one of the values below is used, otherwise use “Class” template (see 4.6.4). According to the ISO AP242 Specification, where applicable, the following values shall be used:

RelationType	
'addition'	The business object specifies that the related document provides supplementary or collateral information with regard to the information provided by the relating document
'copy'	The business object defines a relationship where the related DocumentDefinition is a copy of the relating DocumentDefinition
'decomposition'	The business object defines a relationship where the related DocumentDefinition is one of potentially more sub documents of the relating DocumentDefinition
'derivation'	The business object defines a relationship where the related DocumentDefinition is derived from the relating DocumentDefinition
'peer'	The business object specifies that the related document provides required information with regard to that provided by the relating document. The peer document is essential for a complete understanding
'reference'	The business object defines a relationship where the related document is referenced from the relating
'sequence'	The business object defines a logical sequence where the related DocumentDefinition comes after the relating DocumentDefinition
'substitution'	The business object defines a relationship where the related DocumentDefinition replaces the relating DocumentDefinition
'translation'	The DocumentDefinitionRelationship specifies that the related document is generated through a translation process from the relating document

- **Related**: the other object of [DocumentDefinition](#) that is part of the relationship
- Other attributes than these are not covered by these Recommended Practices; their use is discouraged as it would depend on mutual agreements between data exchange partners.

### 8.3 Template “DocumentVersionRelationship”

Used to relate several versions of the same document:

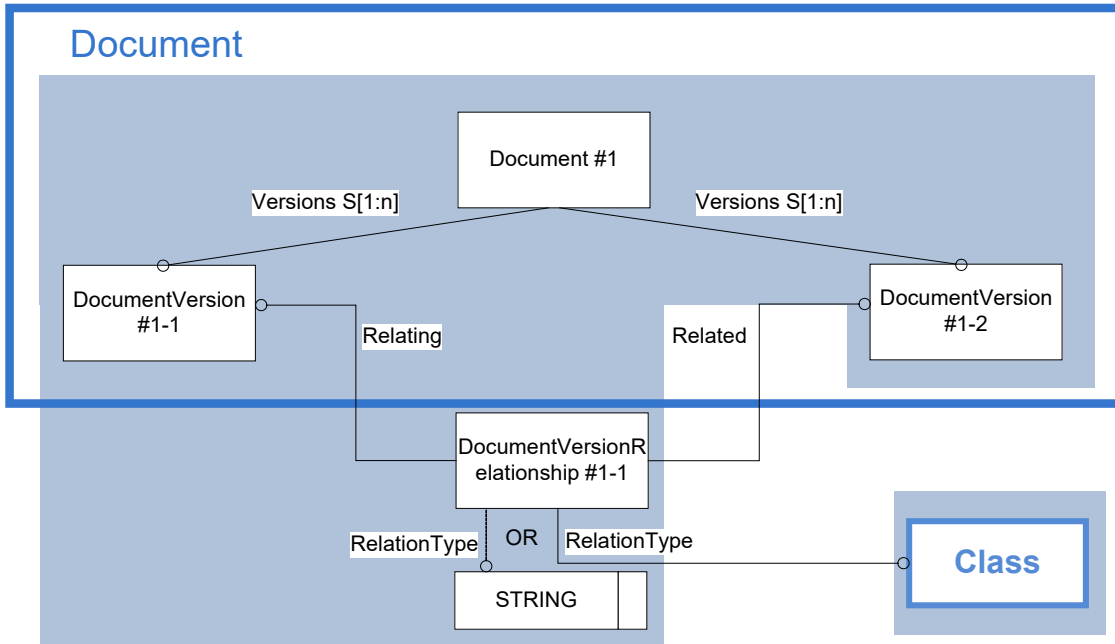

or of different documents.

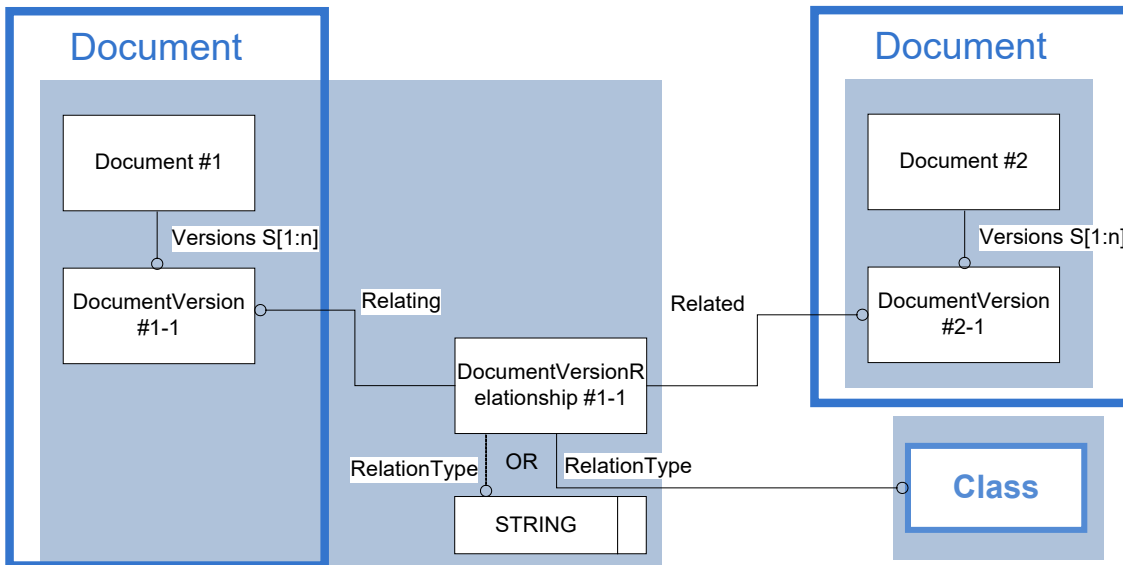


Figure 38: Template “DocumentVersionRelationship”

## The Instance Model: STEP exchange file format (ISO10303 AP242 BO Model XML syntax)

```
<Document uid="doc--0000000017D374A0">
...
  <Versions>
    <DocumentVersion uid="dv--0000000017D374A0">
...
      <DocumentVersionRelationship uid="dvr--1234">
        <Related uidRef="dv--000000001EB04CF0"/>
        <RelationType>
          <ClassString>sequence</ClassString>
        </RelationType>
      </DocumentVersionRelationship>
...
    </DocumentVersion>
  </Versions>
</Document>
```

Entity DocumentVersionRelationship attributes	Attribute type
ClassifiedAs	OPTIONAL SET[1:?] of Classification
Description	OPTIONAL DescriptorSelect
Id	OPTIONAL IdentifierSelect
Related	DocumentVersion
RelationType	ClassSelect
ActivityAssignment	OPTIONAL SET[1:?] of ActivityAssignment
ActivityMethodAssignment	OPTIONAL SET[1:?] of ActivityMethodAssignment
ApprovalAssignment	OPTIONAL SET[1:?] of ApprovalAssignment
CertificationAssignment	OPTIONAL SET[1:?] of CertificationAssignment
DateAndPersonAssignment	OPTIONAL SET[1:?] of DateAndPersonAssignment
DatetimeAssignment	OPTIONAL SET[1:?] of DateTimeAssignment
DocumentAssignment	OPTIONAL SET[1:?] of DocumentAssignment
EffectivityAssignment	OPTIONAL SET[1:?] of EffectivityAssignment
EventAssignment	OPTIONAL SET[1:?] of EventAssignment
FrozenAssignment	OPTIONAL SET[1:?] of FrozenAssignment
ModelPropertyAssignment	OPTIONAL SET[1:?] of ModelPropertyAssignment
OrganizationOrPersonInOrganizationAssignment	OPTIONAL SET[1:?] of OrganizationOrPersonInOrganizationAssignment
PropertyDefinitionAssignment	OPTIONAL SET[1:?] of PropertyDefinitionAssignment
PropertyValueAssignment	OPTIONAL SET[1:?] of PropertyValueAssignment
TimeIntervalAssignment	OPTIONAL SET[1:?] of TimeIntervalAssignment

Table 51: "DocumentVersionRelationship" Attributes

### Attribute recommendations

- **RelationType**: the meaning of the relationship. Use ClassString type if one of the values below is used, otherwise use “Class” template (see 4.6.4). According to the ISO AP242 Specification, where applicable, the following values shall be used:

RelationType	
'derivation'	The business object defines a deriving relationship where the related DocumentVersion is based on the relating DocumentVersion which is an earlier version of the same or of a different Document
'hierarchy'	The business object defines a hierarchical relationship where the related DocumentVersion is a subordinate version of the relating DocumentVersion
'sequence'	The business object defines a version sequence where the relating DocumentVersion is the preceding version of the related DocumentVersion that is the following version. For a given DocumentVersion there shall be at most one DocumentVersionRelationship of this relationType referring to this DocumentVersion as 'relating' and at most one DocumentVersionRelationship of this relationType referring as 'related'
'supplied document'	The business object defines a relationship between two DocumentVersion objects (both exchanged in the same XML file) representing the same object in different organizational contexts

- **Related**: the other object of [DocumentVersion](#) that is part of the relationship
- Other attributes than these are not covered by these Recommended Practices; their use is discouraged as it would depend on mutual agreements between data exchange partners.



## 9 External Files

In the same way than in section 7 of the PDM Schema Usage Guide V4.3, the aim of this section is to map simple external references to a named file.

Referencing a specific element within the file (External Element References or EER) is not in scope of this document.

Depending on the business use case, this can be (reusing the terminology defined in the *CAX-IF External References Rec. Pracs.*):

- so-called 'Classic' or 'Basic' references:
  - an ISO STEP Part 21 (AP214, AP242) file containing the geometry of a part
  - an ISO JT file containing the light weight visualization of a part
  - any further standard geometry format (VDAFS, IGES, ...)
  - any proprietary geometry format (CATIA V4,V5,V6, ProEngineer, NX, ...)
- so-called 'Extended' or 'Nested' references:
  - another AP242 XML file (see „nested“ / „fully shattered“ section 9.2)

The referencing of further, non geometrical files (like MSWord, PDF, ...) as well as the referencing of Hardcopies is not in scope if this Recommended Practices document

### 9.1 Template “DigitalFile”

#### **Preprocessor Recommendations:**

The referenced FormatProperties and CreationProperties can be reused within the XML file by all DigitalFiles to which they apply. Dito for the Units referenced by the SizeProperties.

If the DigitalFiles are mapped as Documents, the Content, Creation and Format Properties may be applied to the DigitalDocumentDefinition instead of the DigitalFile, if these values apply to all files associated to the same Document.

If the external files are exchanged in the same directory than the assembly XML file (for example within a zip file), ExternalItem.Source can be left unset.

If the PDM representation is used, it is not recommended to reuse the same DigitalFile in several Documents via DigitalDocumentDefinition.Files.

#### **Postprocessor Recommendations:**

Analogous to the mechanism described in the *CAX-IF External References Rec. Pracs.*:

- the name of the target file is to be expected in ExternalItem.Id
- if ExternalItem does not exist, evaluate DigitalFile.Id (defined as OPTIONAL in the schema, it becomes mandatory in this case)
- the general behavior for evaluating ContentProperty, CreationProperty, FormatProperty and SizeProperty shall be 'only for information' and shall not cause the postprocessor to stop processing if the given content, creation system, format or size is not supported by the postprocessor. The postprocessor shall anyway load and import the file correctly.

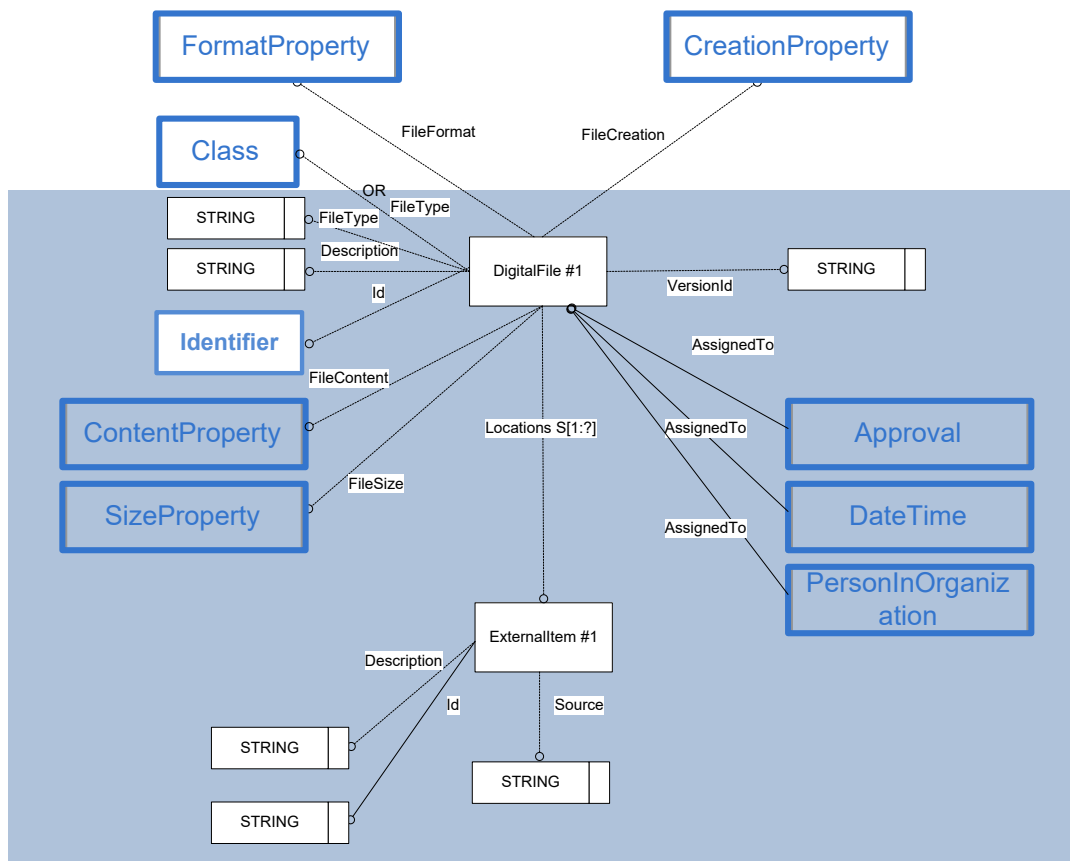


Figure 39: Template "DigitalFile"

### The Instance Model: STEP exchange file format (ISO10303 AP242 BO Model XML syntax)

```

<CreationProperty uid="fcp--V5">
  <CreatingInterface>COM/FOX V6.1.4</CreatingInterface>
  <CreatingSystem>CATIA V5 B25 SP0 HF0</CreatingSystem>
</CreationProperty>

<FormatProperty uid="ffp--STEP">
  <CharacterCode>
    <ClassString>ISO 8859-1</ClassString>
  </CharacterCode>
  <DataFormat>
    <ClassString>ISO 10303-242</ClassString>
  </DataFormat>
</FormatProperty>

<Unit uid="u--000000003">
  <Kind>
    <ClassString>SI system</ClassString>
  </Kind>
  <Name>
    <ClassString>byte</ClassString>
  </Name>
  <Prefix>
    <ClassString>kilo</ClassString>
  </Prefix>

```

```

    </Prefix>
  </Unit>
  <Classification uid="gtc--3">
    <Class>
      <ClassString>solid geometry</ClassString>
    </Class>
  </Classification>
  <File xsi:type="n0:DigitalFile" uid="df--000000001E60C660">
    <FileContent uid="fc--3">
      <DetailLevel>
        <CharacterString>production level</CharacterString>
      </DetailLevel>
      <GeometryTypes>
        <Classification uidRef="gtc--3"/>
      </GeometryTypes>
    </FileContent>
    <FileCreation uidRef="fcp--V5"/>
    <FileFormat uidRef="ffp--STEP"/>
    <FileSize uid="fsp--3">
      <FileSize uid="fsp--3" xsi:type="n0:NumericalValue">
        <Definition>
          <PropertyDefinitionString>file size
property</PropertyDefinitionString>
        </Definition>
        <Name>
          <CharacterString>file size</CharacterString>
        </Name>
        <Unit uidRef=" u--000000003"/>
        <ValueComponent>2.3</ValueComponent>
      </FileSize>
    </FileSize>
    <FileType>
      <ClassString>geometry</ClassString>
    </FileType>
    <Id>
      <Identifier uid="dfid--000000001E60C660--18" id="bolt.stp" idCon-
tex"tRef="o--000000178"/>
    </Id>
    <Locations>
      <ExternalItem uid="idal--000000001E60C660--ei">
        <Id id="bolt.stp"/>
      </ExternalItem>
    </Locations>
  </File>

```

Entity DigitalFile	Attribute type
ClassifiedAs	OPTIONAL SET[1:?] of Classification
Description	OPTIONAL DescriptorSelect
FileContent	OPTIONAL ContentProperty
FileCreation	OPTIONAL CreationProperty
FileFormat	OPTIONAL FormatProperty
FileSize	OPTIONAL SizeProperty

Entity DigitalFile	Attribute type
FileType	OPTIONAL ClassSelect
Id	OPTIONAL IdentifierSelect
Locations	OPTIONAL SET[1:?] of ExternalItem
VersionId	OPTIONAL IdentifierSelect
ActivityAssignment	OPTIONAL SET[1:?] of ActivityAssignment
ActivityMethodAssignment	OPTIONAL SET[1:?] of ActivityMethodAssignment
ApprovalAssignment	OPTIONAL SET[1:?] of ApprovalAssignment
DateAndPersonAssignment	OPTIONAL SET[1:?] of DateAndPersonAssignment
DateTimeAssignment	OPTIONAL SET[1:?] of DateTimeAssignment
EffectivityAssignment	OPTIONAL SET[1:?] of EffectivityAssignment
EventAssignment	OPTIONAL SET[1:?] of EventAssignment
FileRelationship	OPTIONAL SET[1:?] of FileRelationship
FrozenAssignment	OPTIONAL SET[1:?] of FrozenAssignment
InformationUsageRightAssignment	OPTIONAL SET[1:?] of InformationUsageRightAssignment
ModelPropertyAssignment	OPTIONAL SET[1:?] of ModelPropertyAssignment
OrganizationOrPersonInOrganizationAssignment	OPTIONAL SET[1:?] of OrganizationOrPersonInOrganizationAssignment
PropertyDefinitionAssignment	OPTIONAL SET[1:?] of PropertyDefinitionAssignment
PropertyValueAssignment	OPTIONAL SET[1:?] of PropertyValueAssignment
SecurityClassificationAssignment	OPTIONAL SET[1:?] of SecurityClassificationAssignment
SuppliedObjectRelationship	OPTIONAL SET[1:?] of SuppliedObjectRelationship
TimeIntervalAssignment	OPTIONAL SET[1:?] of TimeIntervalAssignment
WorkRequestAssignment	OPTIONAL SET[1:?] of WorkRequestAssignment

Table 52: "DigitalFile" Attributes

### Attribute recommendations

- **Description:** the text or the set of texts that provides further information about the DigitalFile. The value of this attribute need not be specified. Use "Description" template.
- **FileContent:** the kind of geometric data stored into the DigitalFile. The value of this attribute need not be specified.
- **FileCreation:** details of the context of the creation of the DigitalFile => Reference to a CreationProperty. The value of this attribute need not be specified.

- **FileFormat:** data format of the DigitalFile => Reference to a FormatProperty. According to the CAX-IF recommendation the value of this attribute is mandatory, use “FormatProperty” Template (see 10.1) to fulfil it.
- **FileSize:** details of the size of the DigitalFile. The value of this attribute need not be specified.
- **FileType:** type of the DigitalFile => Use ClassString if one of the values below is used; otherwise use “Class” Template (see 4.6.4).

According to the ISO AP214 Specification of document\_type\_property, where applicable, the following values shall be used:

File Type	
'catalogue'	the File is the catalogue in which the associated object is listed
'manual'	the File is the handbook that is supplied for the associated object
'specification'	the File specifies the considerations that lead to the design finally chosen for the associated object
'geometry'	The file represents a shape model
'NC data'	The file represents numerical control data
'FE data'	The file represents finite element data
'sample data'	The file represents measured data
'process plan'	The file represents process planning data
'check plan'	The file represents quality control planning data
'drawing'	The file represents a technical drawing
'structured product data'	The document file contains product meta data and data related to product structure. This value shall be used for nested external references, when the referenced document relates to another BO Model XML file (see section 9.3)

- **Id:** the identifier for the DigitalFile. Although optional in the schema, this attribute shall be specified. Use “Identifier” template (see 4.6.6).
- **Locations:** location of the DigitalFile. If empty or unset, the file shall be located in the same directory as the BO Model XML file referencing to it.
- **VersionId:** the identifier or set of identifiers for the version of the DigitalFile, the file version number. Use IdentifierString type. The value of this attribute need not be specified.
- **ActivityAssignment:** the Activities associated to the DigitalFile. The value of this attribute need not be specified. Use "Activity" template (see Recommended Practices for AP242 XML Change Management).
- **ApprovalAssignment:** to assign an Approval to the DigitalFile. Use the “Approval” template; see 4.6.12 for details. The value of this attribute need not be specified.

- **DateTimeAssignment:** to assign a DateTime to the DigitalFile. Use the “DateTime” template; see 4.6.11 for details. The value of this attribute need not be specified.
- **FileRelationship: to relate to another DigitalFile. Use the “FileRelationship” template, see 9.2.**
- **OrganizationOrPersonInOrganizationAssignment:** to assign an Organization or a PersonInOrganization to the DigitalFile. Use the “PersonInOrganization” template; see 4.6.14 for details. The value of this attribute need not be specified.
- **PropertyValueAssignment:** to assign a PropertyValue to the File. Use the “DocumentFileProperty” template; see 10.5 for details.
- Other attributes than these are not covered by these Recommended Practices; their use is discouraged as it would depend on mutual agreements between data exchange partners.

Entity ExternalItem	Attribute type
Description	OPTIONAL DescriptorSelect
Id	IdentifierSelect
Source	OPTIONAL ExternalSourceSelect
DocumentAssignment	OPTIONAL SET[1:?] of DocumentAssignment
EffectivityAssignment	OPTIONAL SET[1:?] of EffectivityAssignment
InformationUsageRightAssignment	OPTIONAL SET[1:?] of InformationUsageRightAssignment

Table 53: “ExternalItem” Attributes

#### Attribute recommendations

- **Id:** the identifier for the ExternalItem (redundant to DigitalFile.Id). Use of IdentifierString type.
- **Description:** the text or the set of texts that provides further information about the ExternalItem. The value of this attribute need not be specified. Use of “Description” template.
- **Source:** the relative path to the file, or an absolute path (for example in the case of an URL). Use IdentifierString type. The following symbols shall be used in combination with directory names (if needed):
  - ‘/’ or ‘\’ to depict the directory structure
  - ‘.’ To depict the current directory (‘./’ and ‘.\’ are also allowed)
  - ‘..’ to move up to the next higher directory

The use of non-URL absolute paths (like [\\servername\.](#) or c:\... on Windows, or /... on Unix/Linux shall be agreed on project basis, since it prerequisites that both sender and receiver have access to the same file system, which is not a typical use case).

- Other attributes than these are not covered by these Recommended Practices; their use is discouraged as it would depend on mutual agreements between data exchange partners.

**Preprocessor Recommendation:**

ExternalItem.Id shall not contain any path information. The path information shall be mapped only to ExternalItem.Source.

**Postprocessor Recommendation:**

The path shall be extracted from ExternalItem.Source.

**9.2 Template “FileRelationship”**

This relationship enables to relate two files.

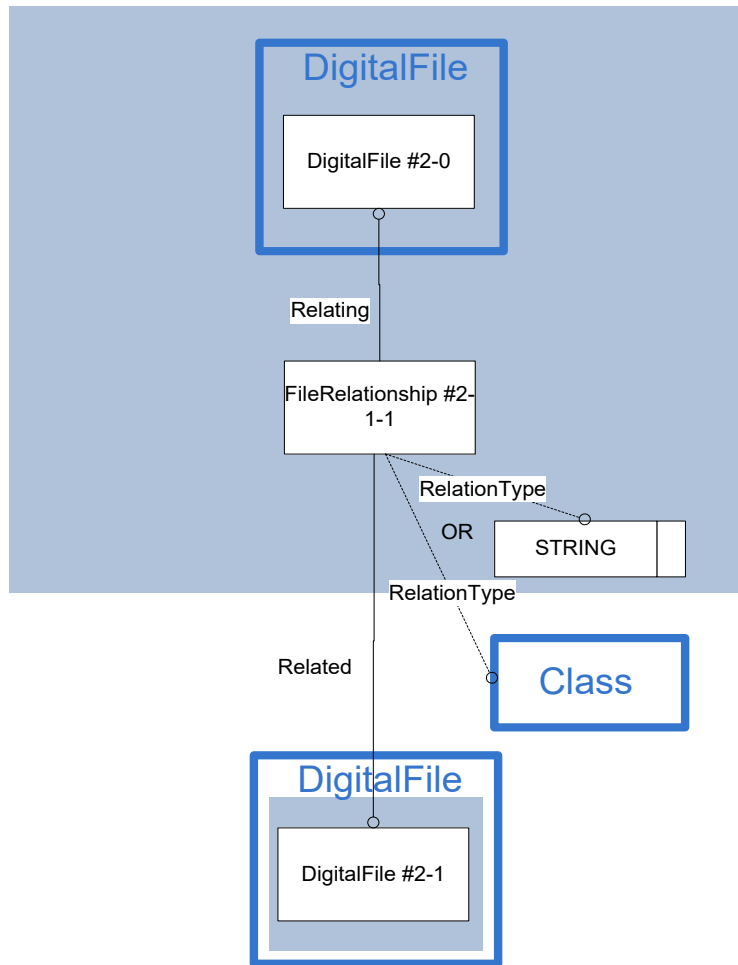


Figure 40: Template “FileRelationship”

**The Instance Model: STEP exchange file format (ISO10303 AP242 BO Model XML syntax)**

```

<File xsi:type="n0:DigitalFile" uid="df--000000001EAA8110">
...
  <Id>
    <Identifier uid="dfid--000000001EAA8110--14" id="l-bracket.stp" idRoleRef="rl--ii" idContextRef="o--000000178"/>
  </Id>
...
  <FileRelationship uid="fr--1">
    <Related uidRef="df--000000001EAE2660"/>
    <RelationType>
  
```

```

    <ClassString>sequence</ClassString>
  </RelationType>
</FileRelationship>
...
</File>
<File xsi:type="n0:DigitalFile" uid="df--000000001EAE2660">
...
  <Id>
    <Identifier uid="dfid--000000001EAE2660--18" id="bolt.stp" idRoleRef="„rl--ii" idContextRef="o--000000178"/>
  </Id>
...
</File>

```

Entity FileRelationship attributes	Attribute type
ClassifiedAs	OPTIONAL SET[1:?] of Classification
Description	OPTIONAL DescriptorSelect
Id	IdentifierSelect
Related	DocumentDefinition
RelationType	ClassSelect
DocumentAssignment	OPTIONAL SET[1:?] of DocumentAssignment
EffectivityAssignment	OPTIONAL SET[1:?] of EffectivityAssignment
InformationUsageRightAssignment	OPTIONAL SET[1:?] of InformationUsageRightAssignment
ModelPropertyAssignment	OPTIONAL SET[1:?] of ModelPropertyAssignment
PropertyDefinitionAssignment	OPTIONAL SET[1:?] of PropertyDefinitionAssignment
PropertyValueAssignment	OPTIONAL SET[1:?] of PropertyValueAssignment

Table 54: "FileRelationship" Attributes

**Attribute recommendations**

- **RelationType:** the meaning of the relationship. Use ClassString type if one of the values below is used, otherwise use "Class" template (see 4.6.4). According to the ISO AP242 Specification, where applicable, the following values shall be used:

RelationType	
'addition'	The business object specifies that the related file provides supplementary or collateral information with regard to the information provided by the relating file
'copy'	The business object defines a relationship where the related file is a copy of the relating file
'decomposition'	The business object defines a relationship where the related file is one of potentially more sub documents of the relating file
'derivation'	The business object defines a relationship where the related file is derived from the relating file



'peer'	The business object specifies that the related file provides required information with regard to that provided by the relating file. The peer document is essential for a complete understanding
'reference'	The business object defines a relationship where the related file is referenced from the relating
'sequence'	The business object defines a logical sequence where the related file comes after the relating file
'substitution'	The business object defines a relationship where the related file replaces the relating file
'translation'	The FileRelationship specifies that the related file is generated through a translation process from the relating file

- **Related:** the other object of [File](#) that is part of the relationship
- Other attributes than these are not covered by these Recommended Practices; their use is discouraged as it would depend on mutual agreements between data exchange partners.

### 9.3 File Structure (monolithic/nested)

Analogous to the mechanism described in the CAx-IF Recommended Practices for External References, it is possible to exchange the multiple level structure either in one XML file (so-called monolithic structure), or to split each part node into a dedicated XML file (so-called nested structure).

The so-called '*specified Reference*' Mechanism is taken over from the Chapter 5.5 and Annex D of VDA-Empfehlung 4956 "Product Data Exchange - Part 1: Assembly Data Exchange" 1.1 from Nov 2002 (see Annex C).

**Note:** this mechanism is not meant to be used for incremental data exchange: a nested structure shall be exchanged with all its components. It may also be used for the purpose of long term archiving, since each product structure node (and its history) can be archived independently from the other product structure nodes. Incremental data exchange is supported by the use of the so-called 'Reference' Mechanism of the above VDA recommendation. This mechanism is described in the next chapter.

Special attention is needed in the case that the set of information contained in the XML files concerning the component parts goes beyond the minimum set of entities and attributes needed to define the external reference – for instance when user defined attributes are given as well. In the structure as illustrated in Figure 41 below, information concerning the Nut part would be stored redundantly in two XML files: the one for the Nut-Bolt Assembly and the one for the Rod Assembly. This opens the door for inconsistencies, especially since the information for the part is only complete when access the assembly file(s) referencing it.

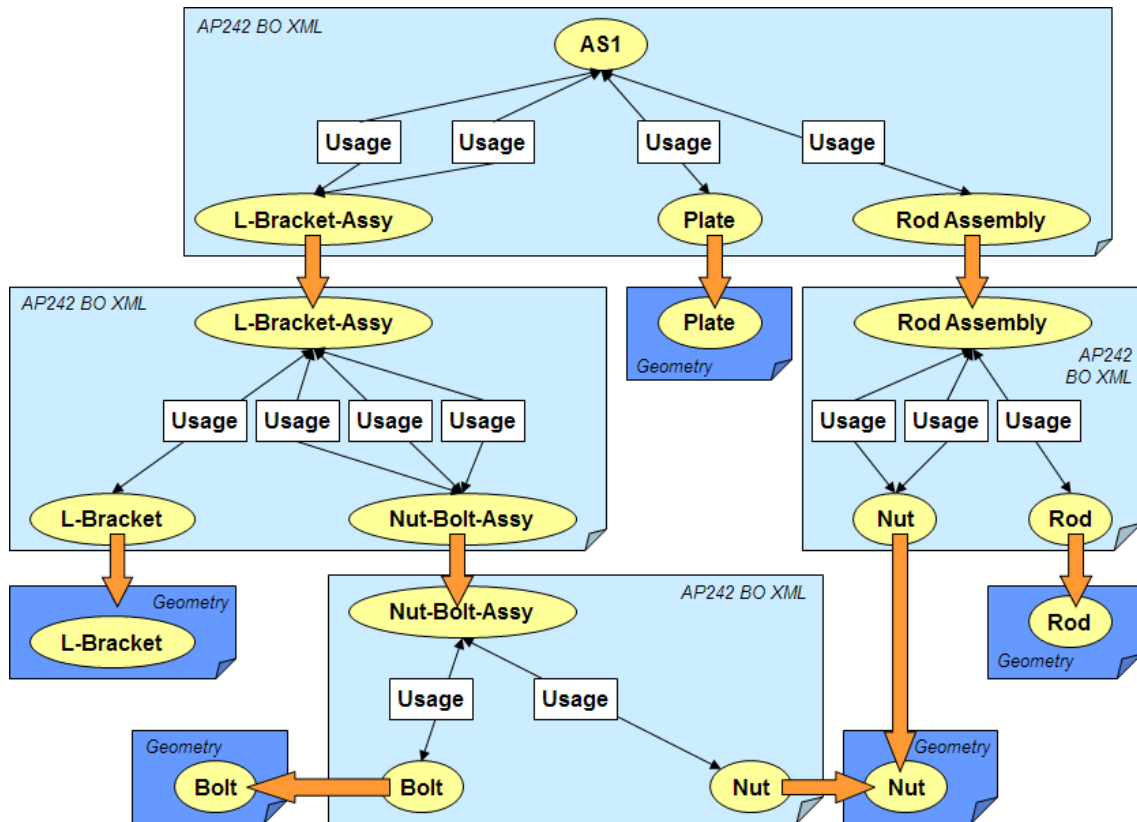


Figure 41: Example for Nested Structure

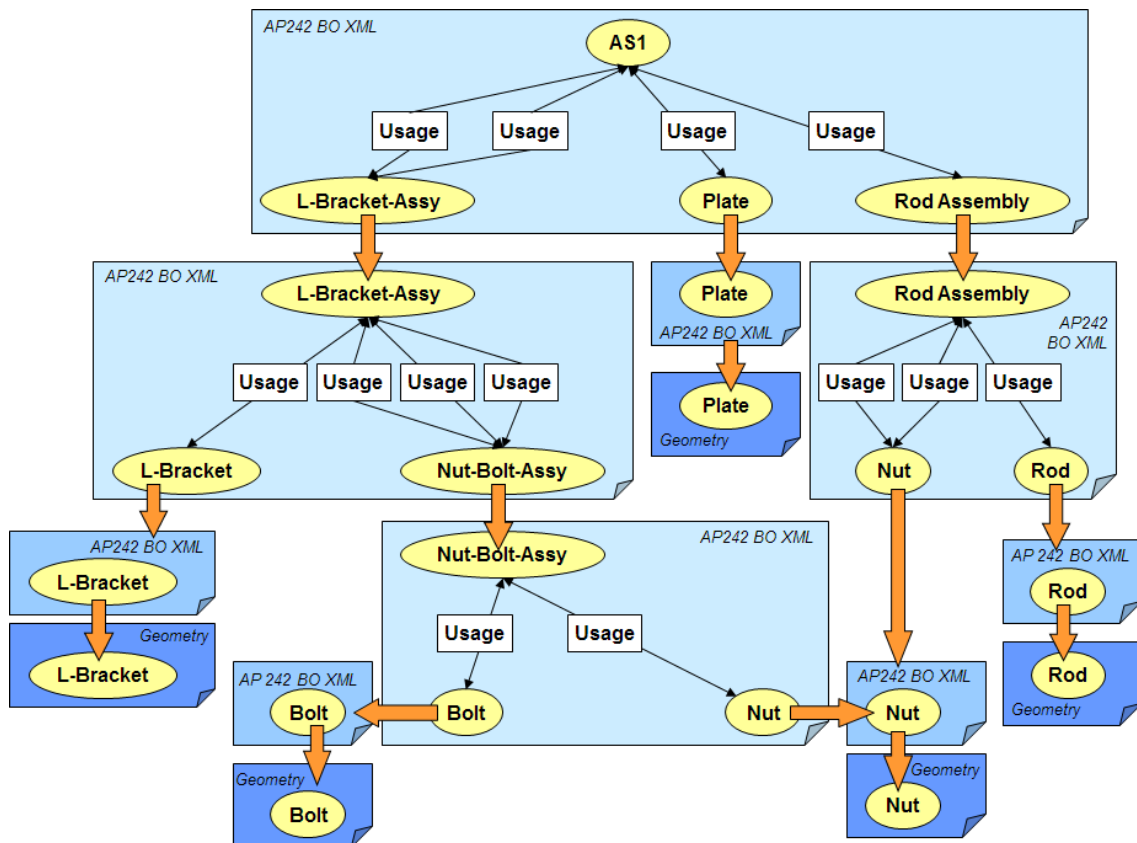


Figure 42: Example for Nested Structure with additional part-level XML files

Hence it is recommended in this case to create an additional XML file for every part file, which carries all PDM-relevant data for this part in one place. The superordinate assembly XML files will reference the part's XML file, which will in turn reference the actual part geometry file. Figure 42 illustrates the extended file structure.

This mechanism also provides the correct input for Long Term Archiving.

A referenced component is mapped in the XML File of its assembly(s) by:

1. mapping a minimum set of entities and attributes (subset of those mapped in the component XML file or in the monolithic mapping):
  - Part.id with idRoleRef, idContextRef, PartName and PartType (since both are mandatory),
  - PartVersion.id (or '/ANY' if the right version get computed at runtime by the PDM application),
  - PartView.id (only if multiple views are handled), PartView.InitialContext (since mandatory)
  - Occurrence.id (to build the referenced part into the assembly node)
2. No further attributes (like descriptions, classifications (except the one mentioned in 4.)), no assignments of any kind (except to the DigitalFile referencing to the component file (see 2.), i.e. no validation properties, ... mapping a reference to the component file (AP242 XML file) between the PartView and the DigitalFile
3. in case the full positioning representation defined in chapter 7.3.2 is used: mapping a reference to the component file (AP242 XML file) between the ExternalGeometric-Model and the DigitalFile, and
4. mapping a dedicated Classification
5. SingleOccurrences, and all their properties shall be defined in the superordinate assembly file, rather than in the part file. Doing so, the part file is independent from where and how often it is built into product structures.

**Remark:** if a SingleOccurrence is defined in the structure, but not used anywhere, it will not be mapped into any superordinate assembly file and thus will get lost.

Remark: in case multiple ids are available for a referenced component, it is sufficient here to mention at least the id having the idRoleRef 'exchange identification information' and to exchange all the multiple ids (including the one having the idRoleRef 'exchange identification information') only inside the component XML file.

If the identifier (with role 'identification information') gets changed to the role 'exchange identification information' (for the same idContextRef), for example if a 'made' part becomes a 'bought' part, the referencing mechanism should be able to evaluate both roles. Otherwise the role would have to be updated in all usages of this part.

It is assumed that even if a part gets more identifiers during his life cycle, the file name of the nested reference shall not change (except regarding the version number).

The following mappings still need to be specified. This will done be as testing of nested product structures progresses in the PDM-IF. The definitions will be updated accordingly in future releases of this document.

1. SpecifiedOccurrences: the XML-embedded SpecifiedOccurrences along the attribute 'Definition' shall also be defined in the superordinate assembly file. Management of references along the attribute 'UpperUsage' needs to be defined. In addition, any SpecifiedOccurrence that is defined in the structure, but not used anywhere, will get lost entirely due to the splitting of the information.
2. Multiple PartViews: shall all Views of a PartVersion always be exchanged into one single file, or could each PartView be exchanged in a separate file? Both approaches are possible. In the latter case, a view identifier must be added to the file name. Requirements and practicality need to be discussed.
3. Documents: Since a PDM document can be shared by multiple parts, shall it be exchanged as a separate file? This scenario is similar to a part file being shared by multiple sub-assemblies as described above but could lead to an exponential increase of references. Requirements and practicality need to be discussed.
4. Kinematics: This will be described in the Recommended Practices for AP242 BO Model XML Kinematics. Definitions applicable to the product structure in general made in this context will be reflected here. This is currently being discussed in the CAx-IF and JT-IF.
5. ProductConfiguration: This will be described in the Recommended Practices for AP242 BO Model XML Configuration Management. Definitions applicable to the product structure in general made in this context will be reflected here. Configuration management in context of nested assemblies has not yet been discussed.

#### ***Preprocessor Recommendations:***

The part-level XML file describes the component part with all its master data. This master data should not be included in the assembly XML files placed above to avoid inconsistencies. Whether the part-level XML file is needed depends on the use case: in the area of Long-Term Archiving, each part needs to be fully defined on its own, with its master data and geometry, which requires the additional XML file. For the exchange of an assembly structure with plain references to the component parts and no additional PDM information, it is optional.

To follow a reference from one XML file to another, the uniqueness of the parts is not ensured via the uids of the XML elements in the different XML files (the same part version could have a different uid in each XML file where it is defined or referenced), but via the **Identifier** elements.

Since ExternalGeometricModel that references to the XML shall have the same value in Id than the DigitalFile.Id and ExternalItem.Id (see recommendation in chapter 9.3.2), it doesn't reference the geometry of the component, but the AP242 XML file where the component is described (nut.stpx).

For the purpose of the typical CAx-IF data exchange use case of these recommended practices, the use of '/ANY' is not recommended.

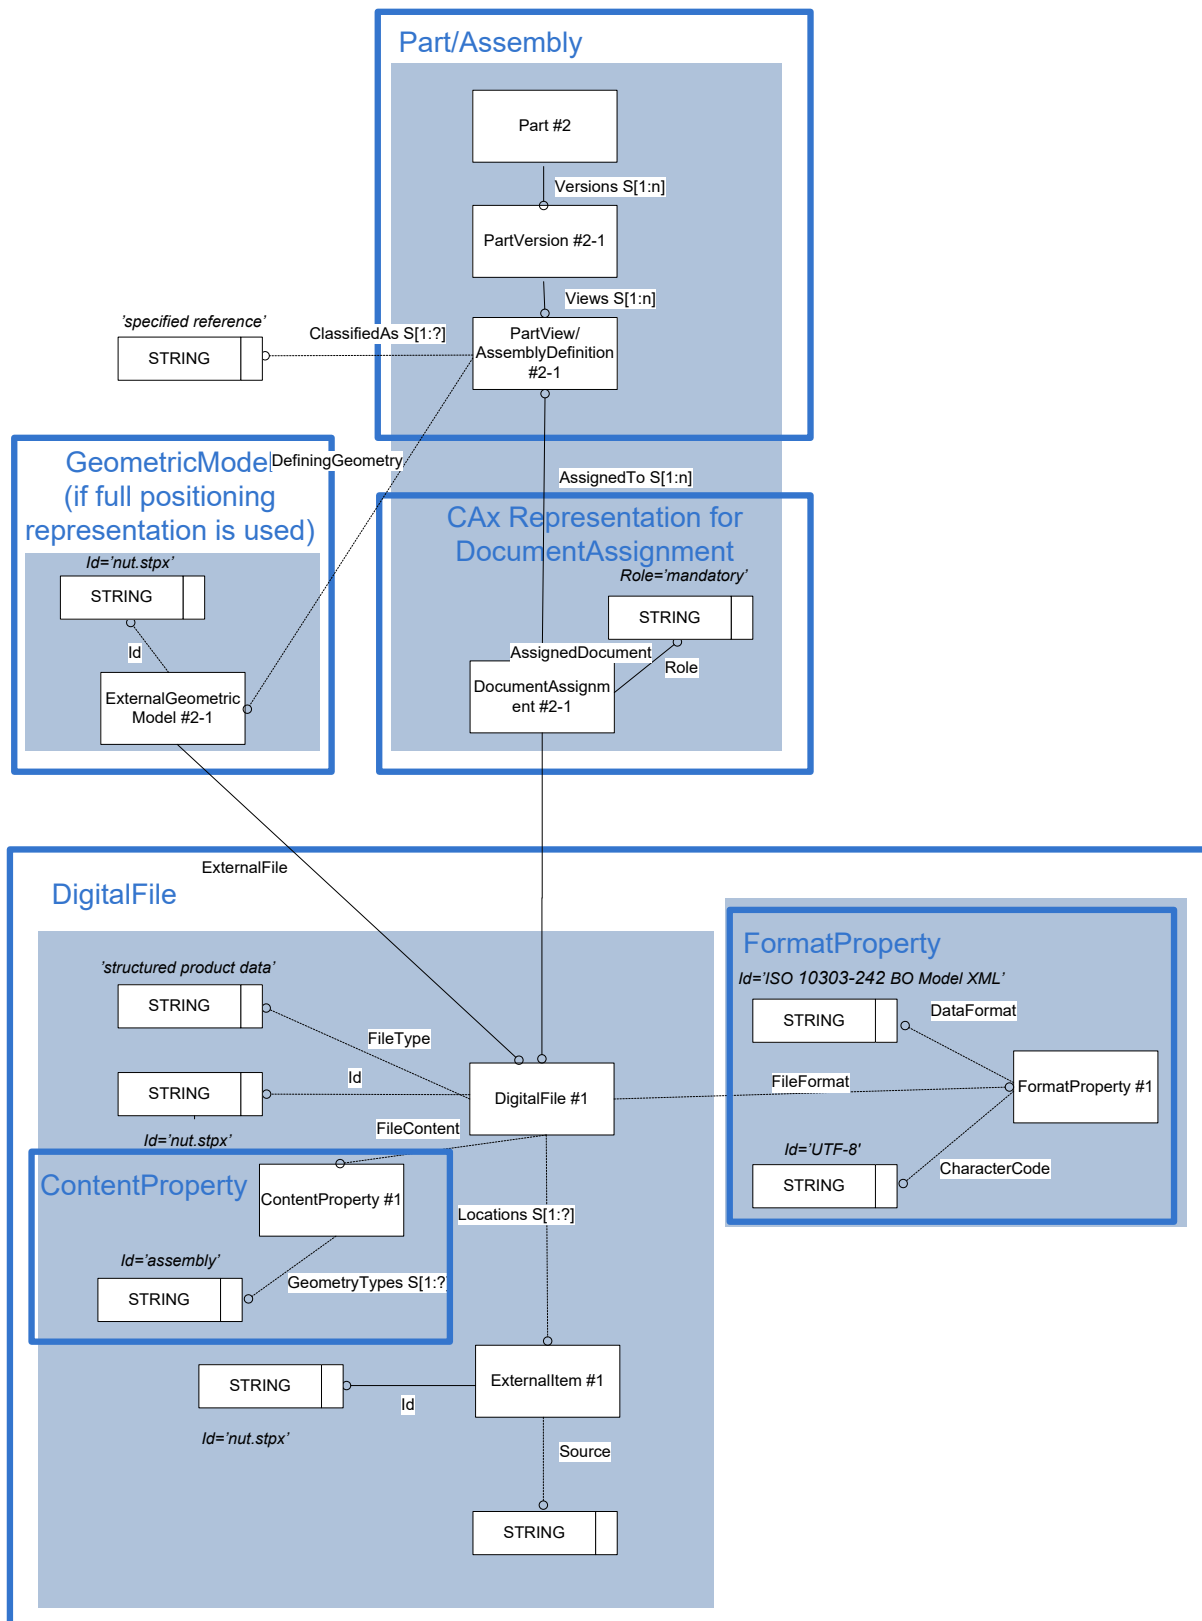


Figure 43: Element Structure for Nested XML File

## The Instance Model: STEP exchange file format (ISO10303 AP242 BO Model XML syntax)

```
<Classification uid="vda--SpecifiedReference">
  <Class>
    <ClassString>specified reference</ClassString>
  </Class>
</Classification>
<Part uid=" p--000000001E720B30">
  <Id>
    <Identifier uid="pid--000000001E720B30--id7" id="nut" idRoleRef=„rl--
ii" idContextRef="o--000000178"/>
  </Id>
  ...
  <Versions>
    <PartVersion uid="pv--000000001E720B30--id7">
      <Id id="/NULL"/>
      <Views>
        <PartView uid="pvv--000000001E720B30--id7">
          <ClassifiedAs>
            <Classification uidRef="vda--SpecifiedReference"/>
          </ClassifiedAs>
          ...
          <DefiningGeometry uidRef="egm--000000001E720B30"/>
          <DocumentAssignment xsi:type="n0:DocumentAssignment" uid="da--
000000001A304330--id7">
            <AssignedDocument uidRef="df--000000001E720B30"/>
            <Role>
              <ClassString>mandatory</ClassString>
            </Role>
          </DocumentAssignment>
        </PartView>
      </Views>
    </PartVersion>
  </Versions>
</Part>

<RepresentationContext uid="ccs--1" xsi:type="n0:GeometricCoordinateSpace">
  <Id id="/NULL"/>
  <Representations>
    <Representation uid="egm--000000001E720B30"
xsi:type="n0:ExternalGeometricModel">
    ...
      <Id id="nut.stpx"/>
    ...
      <ExternalFile uidRef="df--000000001E720B30"/>
    </Representation>
    ...
  </Representations>
  ...
</RepresentationContext>

<FormatProperty uid="ffp--AP242BOMODEL">
```

```
<CharacterCode>
  <ClassString>UTF-8</ClassString>
</CharacterCode>
<DataFormat>
  <ClassString>ISO 10303-242 BO Model XML</ClassString>
</DataFormat>
</FormatProperty>
<Classification uid="gtc--2">
  <Class>
    <ClassString>assembly</ClassString>
  </Class>
</Classification>
<CreationProperty uid="fcp--V5">
  <CreatingInterface>COM/FOX V6.1.4</CreatingInterface>
  <CreatingSystem>CATIA V5 B25 SP0 HF0</CreatingSystem>
</CreationProperty>
<File xsi:type="n0:DigitalFile" uid="df--000000001E720B30">
  <FileContent uid="fc--4">
    <GeometryTypes>
      <Classification uidRef="gtc--2"/>
    </GeometryTypes>
  </FileContent>
  <FileCreation uidRef="fcp--V5"/>
  <FileFormat uidRef="ffp--AP242BOMODEL"/>
  <FileType>
    <ClassString>structured product data</ClassString>
  </FileType>
  <Id>
    <Identifier uid="dfid--000000001E720B30--19" id="nut.stpx"
idRoleRef="„rl--ii" idContextRef="o--000000178"/>
  </Id>
  <Locations>
    <ExternalItem uid="idal--000000001E720B30--ei">
      <Id id="nut.stpx"/>
    </ExternalItem>
  </Locations>
</File>
```

Unlike in section 11.1 and 11.2 (CAx vs. PDM representation of DocumentAssignment, the references to the intermediate XML files shall not be mapped as a managed document, since these are not stored as managed document in the PDM system, but are only created during the export process.

### **Preprocessor Recommendations:**

- If multiple PartVersions of a Part are provided, each PartVersion shall be mapped to a separate file => the Part.Id and the PartVersion.Id shall be used to name the files.
- DigitalFile.VersionId shall not be set
- If all the nested stpx files and the document files are exchanged within an overall archive, the compression algorithm used to build the archive shall be compliant to the "Recommended Practices for STEP File Compression" from the CAx IF (see under [https://www.cax-if.de/documents/rec\\_prac\\_file\\_compression\\_v12.pdf](https://www.cax-if.de/documents/rec_prac_file_compression_v12.pdf)).



- If the product structure mapped in the nested stpx file has one single top level assembly node, the name of the overall archive shall be the same as the stpx file of the top level assembly node. This simplifies the analysis for the import tool which doesn't have to go through all stpx files to find out the top node.
- Compression of single stpx files (exchanged as stpxZ files) is optional. If used, it shall comply to the "Recommended Practices for STEP File Compression" from the CAx IF.
- No nested stpx file shall be created for a part where the so-called 'Reference' Mechanism (as defined in chapter 9.4.1) is used.

#### **Postprocessor Recommendations:**

- If the data is exchanged within an overall archive, and if there is one stpx(Z) file within the archive having the same name as the archive itself, this stpx(Z) can be assumed to be the only top-level assembly node of the whole data. If not, the top-level assembly node(s) have to be found out through scanning all the stpx(Z) files.
- The import status of each file shall be logged in the result report, so that in case of problems, the files not imported before can be imported during the next attempt, instead of importing the whole structure again.
- If any file present in the import directory hasn't been processed (for example because its reference from another file was not evaluated or ignored), it is recommended to log it in the result report.
- Any file reference that couldn't be resolved (for example because the referenced file couldn't be found) should be logged in the result report.

### **9.4 Incremental Data Exchange**

The key feature of incremental data exchange is that only a subset of available product data is exchanged at a certain time. Incremental data exchange reduces the amount of data to be exchanged. This approach supports actual practice in product data exchange where commonly after the first data exchange only subsets or additional portions of product data are exchanged.

The following examples give an idea of incremental data exchange.

**Example:** An OEM sends or makes available changes of a particular subset of product data to be communicated, e.g., new versions of items, documents, geometry, positioning information or item properties. Usually the data set has links to product data, which has been already sent before or which will be sent later.

**Example:** A supplier sends an update of data. Usually the supplier only has a specific subset of product data from the OEM's viewpoint that he is allowed to modify.

In these cases it is feasible to exchange only the modified portion of product data. Another reason to exchange only a particular portion of product data is that a supplier should only modify and send back the shaft of a gearbox, but he has received the complete gearbox with all connected components in order to provide the environmental context.

Incremental data exchange also includes the exchange of administrative product data without CAx files and the exchange of single items and their administrative product data without item structure.

**Note:** An "incremental data exchange" is different from a "delta exchange". A delta exchange implies an exchange of differences only usually with respect to a set of data previously sent. That means it is the exchange of results of actions, which have been performed at the sender's side and are to be communicated, e.g., "add component 3 and 4 to an assembly" or "remove document xyz from the set of describing documents of an item". A delta exchange has to be harmonized between two communication partners because change processes usually are company specific.



## 9.4.1 Reference mechanism

The so-called 'Reference' Mechanism is taken over from the Chapter 5.5 and Annex D of VDA-Empfehlung 4956 "Product Data Exchange - Part 1: Assembly Data Exchange" 1.1 from Nov 2002.

**Note:** this mechanism is not meant to be used for nested structures (see previous chapter),

**Example:** An assembly structure is exchanged, but (some) components are only referenced and not exchanged including their complete definition at the same time.

**Example:** A managed document may be exchanged, but the representing file is only referenced (i.e. no evaluation of ExternalItem.source).

A reference is a means to identify a single instance or a group of related instances at object level. It is applicable to an existing object at sender's and/or receiver's site or represents an object as a 'placeholder', i.e., an instance may be referenced at a certain time of data exchange if it was exchanged before or if it will be exchanged later on.

A reference object gets classified as 'reference':

part:

- Part: classifiedAs (only if the sender PDM system has a part master object)
- PartVersion: classifiedAs (only if the sender PDM system has a distinct object for part version and part view and supports multiple view of the same part version)
- PartView: classifiedAs (sender PDM system maps Part/PartVersion/PartView to one object, or if PDM system supports multiple PartViews and some of them shall be referenced)

document:

- Document: classifiedAs (only if the sender PDM system has a document master object)
- DocumentVersion: classifiedAs (only if the sender PDM system has a distinct object for document version and document definition and supports multiple document definitions of the same document version)
- DigitalDocumentDefinition: classifiedAs (sender PDM system maps Document/DocumentVersion/DocumentDefinition to one object, or if PDM system supports multiple DocumentDefinitions and some of them shall be referenced)

file:

- DigitalFile: classifiedAs

A reference object is mapped in the XML File of its assembly(s) by mapping a minimum set of entities and attributes. The application of the reference mechanism is recommended for:

part:

- Part: id with idRoleRef, idContextRef and PartTypes (since mandatory),
- PartVersion: id (or '/ANY' if the right version get computed at runtime by the PDM application),
- PartView: id (optional), initialContext (mandatory) with ViewContext.ApplicationDomain='/UNCHANGED' and ViewContext.LifeCycleStage='/UNCHANGED', since both are mandatory

document:

- Document: id with idRoleRef, idContextRef and DocumentTypes (sind mandatory),
- DocumentVersion: id (or '/ANY' if the right version get computed at runtime by the PDM application),
- DigitalDocumentDefinition: id (optional)

file:

- DigitalFile: id with idRoleRef and idContextRef,
- DigitalFile: versionId (optional or '/ANY' if the right version gets computed at runtime by the PDM application).

### **Preprocessor Recommendations:**

- Each reference shall be explicitly classified as 'reference'
- The minimum set of entities, attributes and attribute values (see above) shall identify uniquely the referenced object. Otherwise a receiver will interpret the same object as a new one because of different identifiers.
- The number of relationships (between the assembly and referenced components, between part and a referenced document and between document and referenced file) has to represent the complete list (of components of the assembly, of documents of the part and of files in the document), independently whether an individual component/document/file is referenced or its complete definition is exchanged.
- Other data associated to the referenced instance or group of instances (properties, dates, persons, approval...) shall not be instantiated, since they will be ignored by the postprocessor. This applies also for documents associated to a reference part and for files associated to a reference document, as well as to the assembly links and effectivities from a referenced assembly to its direct components:
  - For example, if bounding box geometry has been sent previously, but contains changed components, the assembly nodes of the bounding box geometry shall be sent completely *with* the assembly links to the changed components and with 'reference' links to the unchanged components.
  - For example, if some components have been sent previously but their positioning within the assembly changed, the unchanged components would be sent as 'reference' *without* their underlying assembly links; only their positioning would be exchanged.

### **Postprocessor Recommendations:**

- If the target PDM system hasn't got a part master object:
  - the attributes/properties of a non-reference Part(master) shall be mapped only to those part versions / part views that are mentioned for this part in the XML file and that are not 'referenced'. If all PartVersions/PartViews are 'referenced', the part master changes will be ignored.  
Dito for Document/DocumentVersion,
  - the attributes/properties (present in the target PDM system) of a reference Part(master) shall apply to the import of the PartVersions/PartViews

- If the target PDM system hasn't got a part view object, the attributes/properties (present in the target PDM system) of a reference PartView shall apply to the import of the PartVersion.

Ditto for DocumentVersion/DigitalDocumentDefinition,

- It is assumed that all attributes/properties of a referenced part/document/file are unchanged. This applies also to the documents of a referenced part and to the files of a referenced document, but not necessarily to the assembly links and effectivities from a referenced assembly to its direct underlying components: if they are provided, they should be imported (either none or all the direct assembly links under the assembly node will be provided).

Here are some examples:

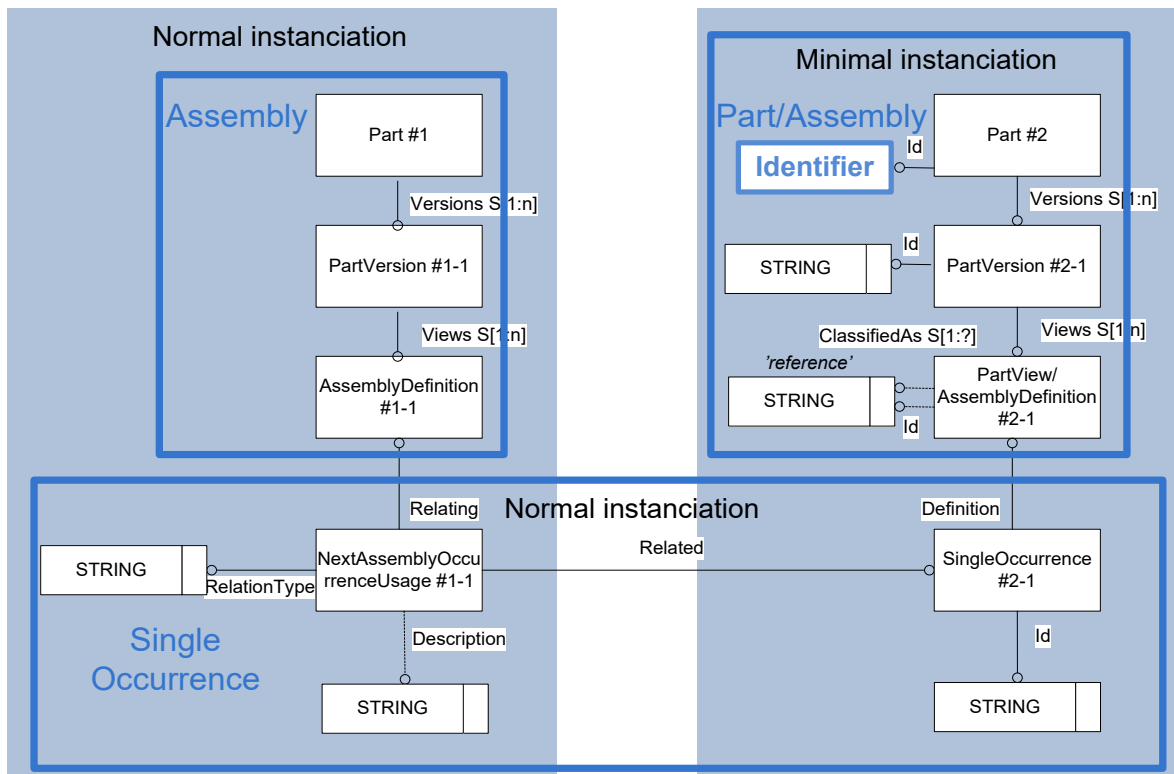


Figure 44: Template "Component reference"

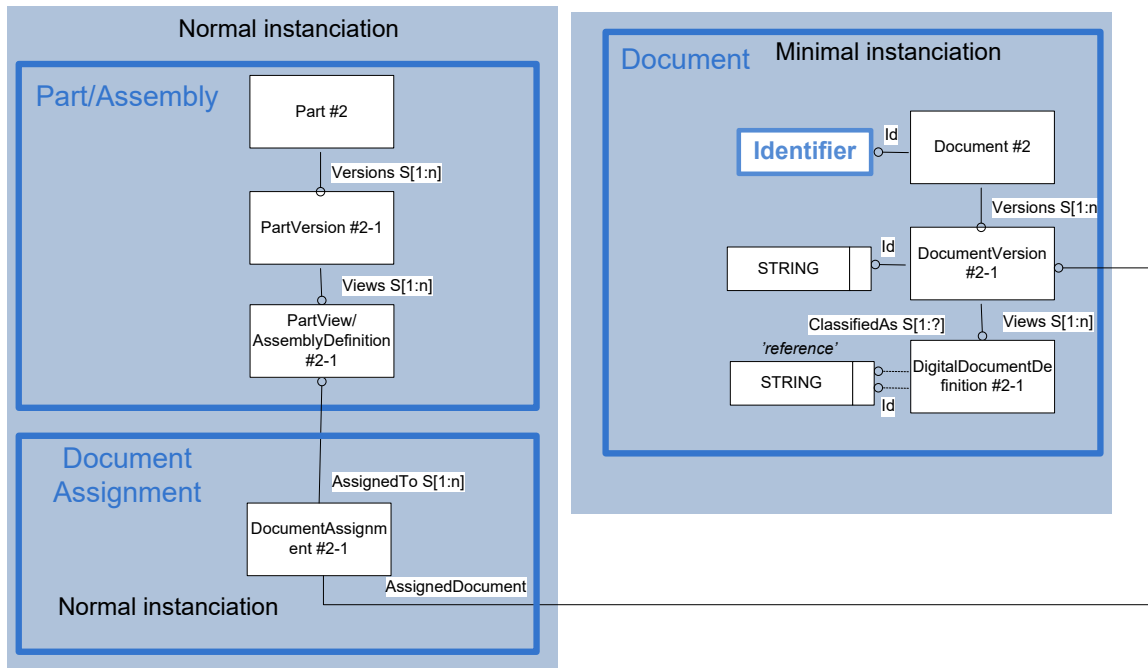


Figure 45: Template "Document reference"

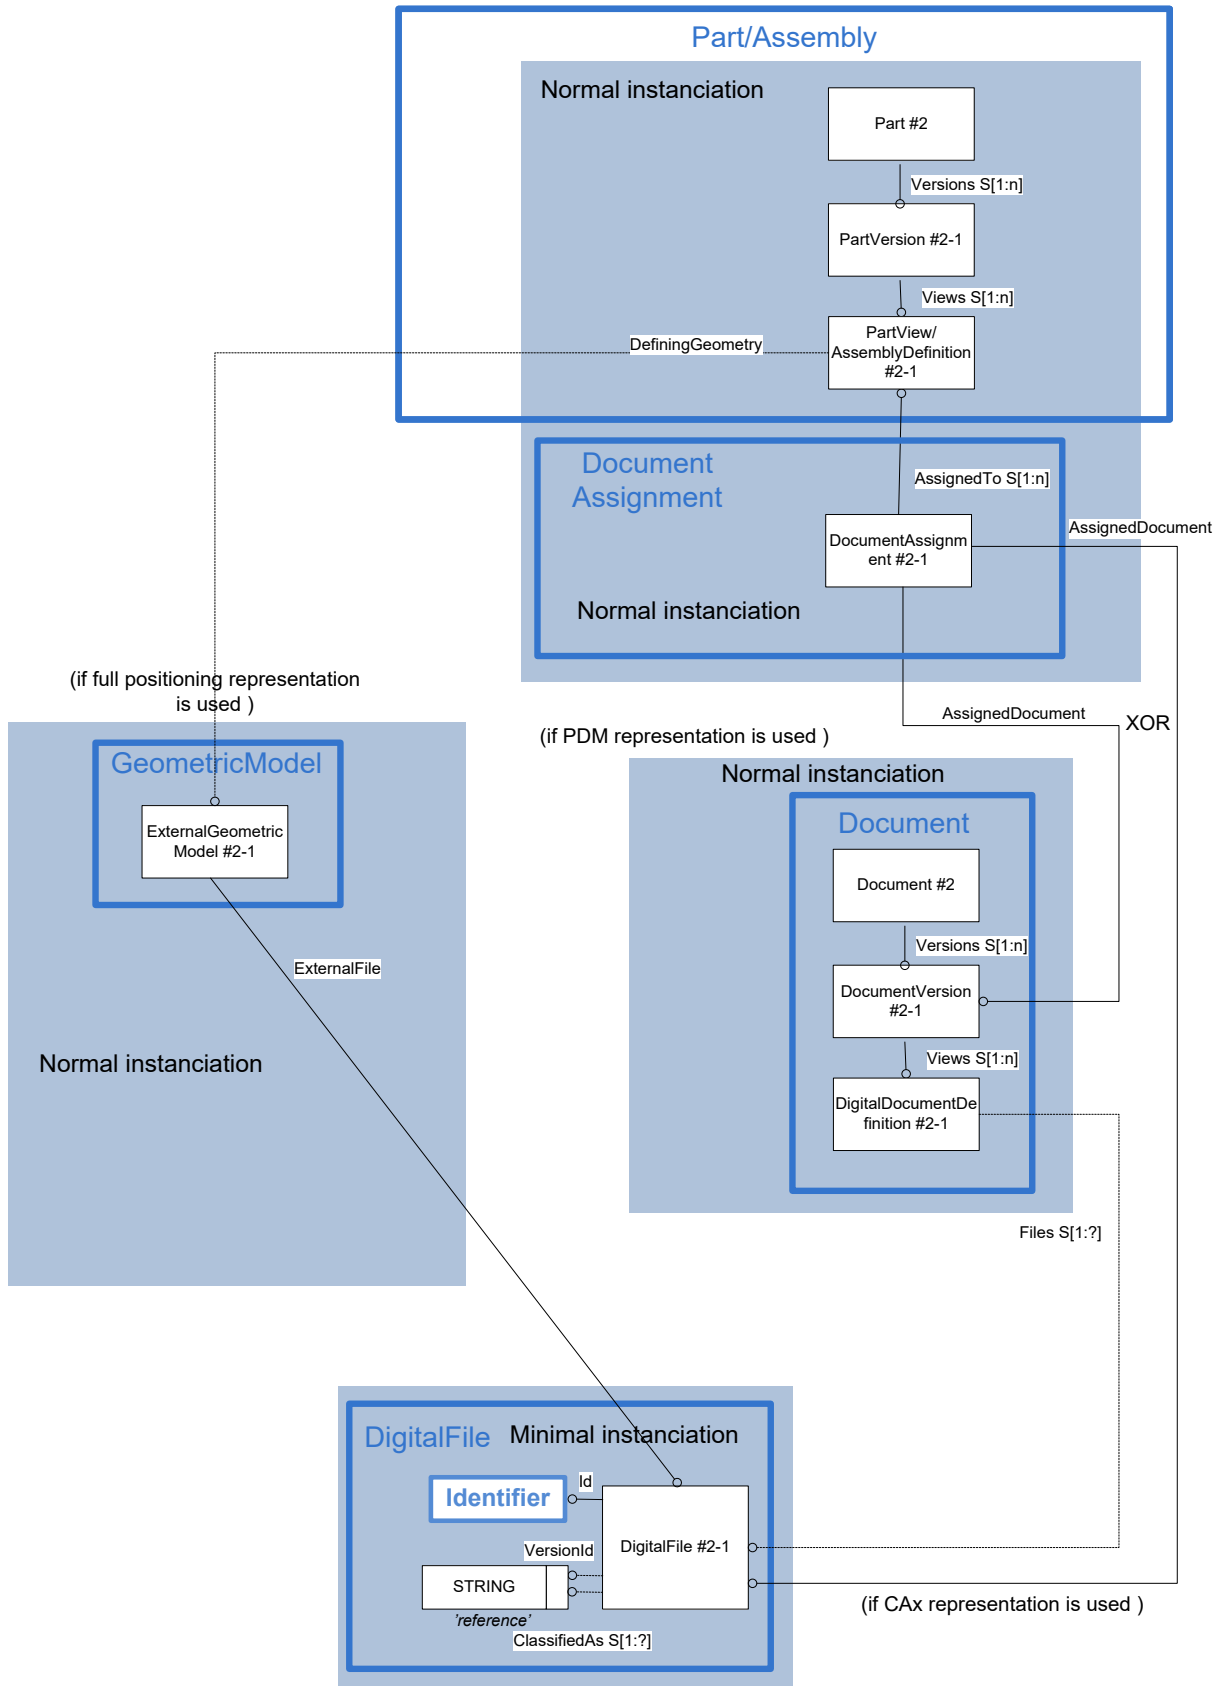


Figure 46: Template "File reference"

## 10 Document and File Properties

### 10.1 Template “FormatProperty”

The `FormatProperty` entity is the specification of characteristics of a File or of a DocumentDefinition that specify the format of the object.

#### The Instance Model: AP242 BO Model XML entities and attributes

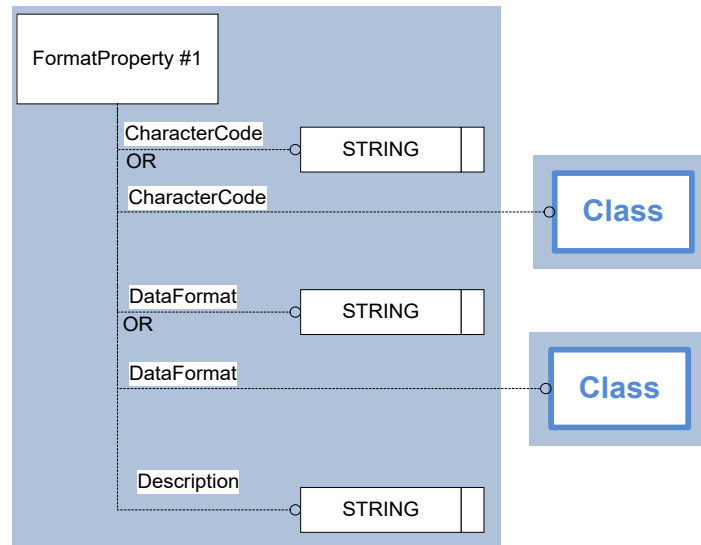


Figure 47: Template “FormatProperty”

Entity FormatProperty	Attribute type
CharacterCode	OPTIONAL ClassSelect
DataFormat	OPTIONAL ClassSelect
Description	OPTIONAL DescriptorSelect
Id	OPTIONAL IdentifierSelect
SizeFormat	OPTIONAL RectangularSize
SuppliedObjectRelationship	OPTIONAL SET[1:?] of SuppliedObjectRelationship

Table 55: “FormatProperty” Attributes

#### Attribute recommendations

- CharacterCode:** the computer application used to create the DigitalFile. The value of this attribute need not be specified. Use ClassString type if one of the values below is used, otherwise use “Class” template (see 4.6.4). According to the ISO AP242 Specification, where applicable, the following values shall be used:

CharacterCode	Explanation
'binary'	The document contains data in binary format
'IEC 61286'	The coded character set used to encode the document data according to IEC 61286
'ISO 646'	The coded character set used to encode the document data according to ISO 646; NOTE: The character set in ISO 646 is identical to the character set commonly known as ASCII

CharacterCode	Explanation
'ISO 6937'	The coded character set used to encode the document data is according to ISO/IEC 6937
'ISO 8859-1'	The coded character set used to encode the document data according to ISO 8859-1; NOTE: The character set in ISO 8859-1 is identical to the character set commonly known as LATIN-1. This is the default for STEP Part 21 files.
'compressed ISO 8859-1'	The coded character set used to encode the document data according to ISO 8859-1, where the file was compressed using the PKZip 2.04g format <sup>1</sup>
'UTF-8'	The coded character set used to encode the document data according to to UTF-8. NOTE: The character set in UTF-8 is the default encoding for XML files, including STEP BO Model XML files.
'compressed UTF-8'	The coded character set used to encode the document data according to UTF-8, where the file was compressed using the PKZip 2.04g format <sup>1</sup>
'ISO 10646'	The coded character set used to encode the document data according to ISO/IEC 10646.

- **DataFormat:** the convention that was used to structure the information in the characterized object. The value of this attribute need not be specified. Use ClassString type if one of the values below is used, otherwise use "Class" template (see 4.6.4). According to the ISO AP242 Specification, where applicable, the following values shall be used:

DataFormat	Explanation
'DXF'	The document contains data in Drawing Exchange File format
'IGES'	The document contains data in Initial Graphics Exchange Specification format
'ISO 10303-203', 'STEP AP203'	Eventually followed by the release number (E2, E3): The document contains data in ISO 10303-203 Part21 format
'ISO 10303-214', 'STEP AP214'	Eventually followed by the release number (E2,E3): The document contains data in ISO 10303-214 Part21 format
'STEP AP214 CC06'	The document contains data in ISO 10303-214 Part21 format according to Conformance Class 06 (product structure only, the file contains no geometry, but references to external geometry files)

<sup>1</sup> **Note:** If the respective compressed files are STEP files per the Recommended Practices for STEP File compression (see Annex C), the file reference shall always point to the uncompressed file. Thus, the FormatProperty should also state the original format, and not the compressed version. The PKZip format definition is available at <https://www.pkware.com/documents/APPNOTE/APPNOTE-6.2.0.txt>

DataFormat	Explanation
'TIFF CCITT GR4'	The document contains data in TIFF CCITT GR4 format
'VDAFS'	The document contains data in VDAFS format
'VOXEL'	The document contains data in VOXEL format
'CAD'	The document contains native CAD data. When used, the Document Creation Property (see 10.3) shall be used to convey specifics on the originating CAD system

**Preprocessor Recommendation:**

In case of a non-native proprietary format (for example CATIA CGR), the DataFormat shall refer to a Class and ExternalClassSystem (see "Class" template 4.6.4).

Additionally, the following values are recommended, where applicable:

DataFormat	Explanation
'ISO 10303-242', 'STEP AP242'	The document contains data in ISO 10303-242 Part 21 format
'ISO 10303-242 BO Model XML'	The document contains data in ISO 10303-242 XML format
'ISO 14306 JT'	The document contains data in ISO 14306 JT format
MS Word	Microsoft Word
MS_Excel	Microsoft Excel
MS Powerpoint	Microsoft Powerpoint
MS Outlook	Microsoft Outlook
MS Access	Microsoft Access
MS Project	Microsoft Project
full text	ASCII text
GIF	Graphics Interchange Format
HPGL	Hewlett-Packard Graphics Language
HTML	ISO/IEC 15445 HyperText Markup Language
JPEG	ISO/IEC 10918 JPEG
PDF	ISO 32000-1 Portable Document Format
TIFF	ISO 12639 Tagged Image File Format

- **Description:** the text or the set of texts that provides further information about the FormatProperty. The value of this attribute need not be specified. Use "Description" template (see 4.6.7).
- Other attributes than these are not covered by these Recommended Practices; their use is discouraged as it would depend on mutual agreements between data exchange partners.



## The Instance Model: STEP exchange file format (ISO10303 AP242 BO Model XML syntax)

```
<FormatProperty uid="ffp--AP242BOMODEL">
  <CharacterCode>
    <ClassString>UTF-8</ClassString>
  </CharacterCode>
  <DataFormat>
    <ClassString>ISO 10303-242 BO Model XML</ClassString>
  </DataFormat>
</FormatProperty>
```

### 10.2 Template “ContentProperty”

The ContentProperty entity is the specification of characteristics precisising the content of a File or of a DocumentDefinition.

### The Instance Model: AP242 BO Model XML entities and attributes

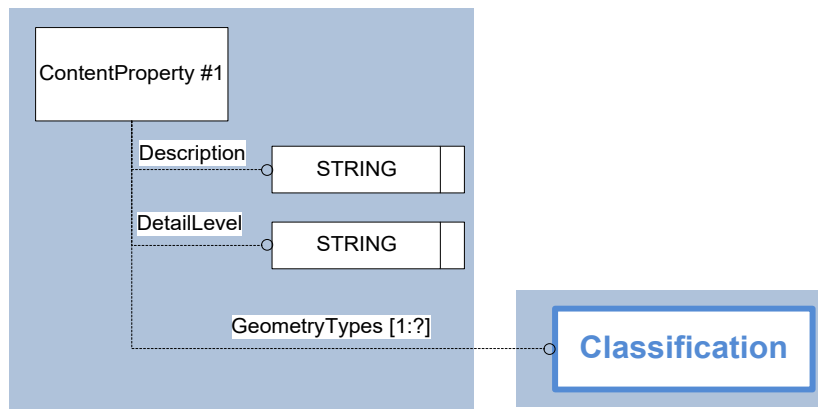


Figure 48: Template “ContentProperty”

Entity ContentProperty	Attribute type
Description	OPTIONAL DescriptorSelect
DetailLevel	OPTIONAL DescriptorSelect
GeometryTypes	OPTIONAL SET[1:?] of Classification
Languages	OPTIONAL SET[1:?] of Language
RealWorldScale	OPTIONAL NumericalValue

Table 56: “ContentProperty” Attributes

#### Attribute recommendations

- **Description:** the text or the set of texts that provides further information about the ContentProperty. The value of this attribute need not be specified. Use “Description” template (see 4.6.7).
- **DetailLevel:** the level of detail that the DigitalFile provides. The value of this attribute need not be specified. Use “Description” template (see 4.6.7). The following recommended values for this attribute are derived from MIL-STD-31000A (see reference in Annex C):

DetailLevel	Explanation
'conceptual level'	Conceptual level data relates to elements defining design concepts in graphic form, and includes appropriate information required for analysis and evaluation of those concepts. The data may consist of simple sketches/models, artist renderings and/or basic textual data
'developmental level'	Developmental level data relates to elements providing sufficient data to support the analysis of a specific design approach, the fabrication of prototype material for test or experimentation, and limited production by the original design organization or with assistance from the original design organization
'production level'	Production level data relates to elements providing the design, engineering, manufacturing, inspection, packaging and quality assurance provisions information enabling the procurement or manufacture of an item. The level of detail shall be sufficient for a competent manufacturer to produce an item, which duplicates the physical, interface, and functional characteristics of the original product, without additional design engineering effort or recourse to the current design activity. Production data shall reflect the approved, tested, and accepted configuration of the defined delivered item

- **GeometryTypes:** details of the context of the creation of the DigitalFile. The value of this attribute need not be specified. As far as applicable, one or several of the values given below can be used. Use "Classification" template (see 4.6.5). Use ClassString type for Classification.Class if one of the values below is used:

**If the DigitalFile contains the geometry of a part:**

GeometryTypes	Explanation
'wireframe geometry'	The document contains a three-dimensional model with precise definitions of wireframes or independent curves, meaning these curves are not edge curves of higher topological elements
'surface geometry'	The document contains a three-dimensional shape with with precise definitions of independent surfaces, meaning these surfaces are not faces of solids
'solid geometry'	The document contains a three-dimensional shape model in advanced boundary representation
'tessellated geometry'	The document contains a simplified shape representation that may consist of curves, surfaces and/or solids
'2D drawing'	The document contains a technical drawing. The drawing may have been derived from a 3D model
'PMI presentation'	The document contains Product and Manufacturing Information in a human-readable form, e.g. as 3D annotations
'PMI representation'	The document contains Product and Manufacturing Information in a semantic, machine-interpretable form

'implicit composite'	The document contains the implicit definition of a composite part as zero-thickness faces (plies) with boundaries and stacking order (laminated table)
'explicit composite'	The document contains the explicit representation of a solid composite part. This value is typically used together with 'tessellated geometry'.

**If the DigitalFile contains another AP242 BO Model XML file (see „nested“ / „fully shattered“ section below):**

GeometryTypes	Explanation
'assembly'	The document contains an assembly structure with reference to the assembled components and their transformation matrices
'assembly with mating elements'	The document contains an assembly structure including the mating components only, such as screws or rivets, with exact positioning information. This assembly representation is intended to be overlaid with the assembly structure for the main components

- Note that the AP242 Standard gives a different list of recommended values for DetailLevel and GeometryTypes. These have, however, been taken over from earlier versions of AP214 and AP203 without further review and are deemed outdated. Hence it was agreed by the CAX-IF to include an updated list that better describes the characteristics of information typically exchanged. This list is currently being reviewed, and after final agreement, an AP242 maintenance issue will be created to update the textual definition in the standard accordingly.

### The Instance Model: STEP exchange file format (ISO10303 AP242 BO Model XML syntax)

```
<Classification uid="gtc--1">
  <Class>
    <ClassString>surface geometry</ClassString>
  </Class>
</Classification>
<Classification uid="gtc--3">
  <Class>
    <ClassString>solid geometry</ClassString>
  </Class>
</Classification>
<File xsi:type="n0:DigitalFile" uid="df-000000001E720B30">
  <FileContent uid="fc-1">
    <DetailLevel>
      <CharacterString>development level</CharacterString>
    </DetailLevel>
    <GeometryTypes>
      <Classification uidRef="gtc--1"/>
      <Classification uidRef="gtc--3"/>
    </GeometryTypes>
  </FileContent>
  ...
</File>
```

### 10.3 Template “CreationProperty”

The `CreationProperty` entity is the specification of characteristics of a File or of a DocumentDefinition. It specifies the context of the creation of the object.

#### Postprocessor Recommendation:

- A `CreationProperty` shall be created if the file extension is not unique (for example ‘.prt’ may be a Creo file or an NX file)

#### Postprocessor Recommendation:

- If no `CreationProperty` is available, the file extension within `File.Id` or `ExternalItem.Id` shall be evaluated.

### The Instance Model: AP242 BO Model XML entities and attributes

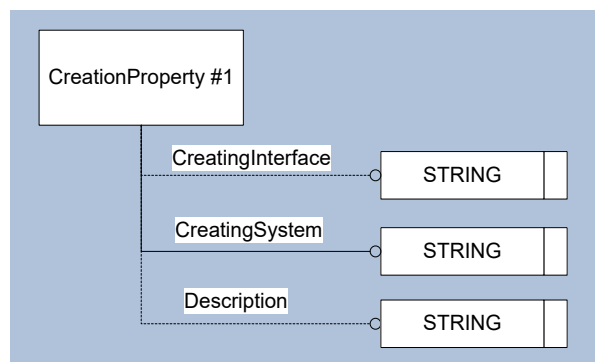


Figure 49: Template “CreationProperty”

Entity CreationProperty	Attribute type
CreatingInterface	OPTIONAL STRING
CreatingSystem	STRING
Description	OPTIONAL DescriptorSelect
OperatingSystem	OPTIONAL STRING

Table 57: “CreationProperty” Attributes

#### Attribute recommendations

- **CreatingInterface:** the computer application used to create the DigitalFile. The value of this attribute need not be specified. If the same preprocessor is used to create the AP242 XML data and the referenced file, `CreatingInterface` will be redundant to `Header.PreprocessorVersion`. In case of a native format, this attribute shall be left un-set.
- **CreatingSystem:** the computer application or the machine that was used to generate the DocumentDefinition or File (for example CATIA V5R19).

Remark: if the data is mapped to AP242 XML and the referenced file are coming from the same system, `CreatingSystem` will be redundant to `Header.OriginatingSystem`.

- **Description:** the text or the set of texts that provides further information about the CreationProperty. The value of this attribute need not be specified. Use "Description" template (see 4.6.7).
- Other attributes than these are not covered by these Recommended Practices; their use is discouraged as it would depend on mutual agreements between data exchange partners.

### The Instance Model: STEP exchange file format (ISO10303 AP242 BO Model XML syntax)

```
<CreationProperty uid="fcp-V5">
  <CreatingInterface>COM/FOX V6.1.4</CreatingInterface>
  <CreatingSystem>CATIA V5 B25 SP0 HF0</CreatingSystem>
</CreationProperty>
```

#### 10.4 Template "SizeProperty"

The SizeProperty entity is the specification of the size of a File or of a DocumentDefinition that specify the format of the object.

#### The Instance Model: AP242 BO Model XML entities and attributes

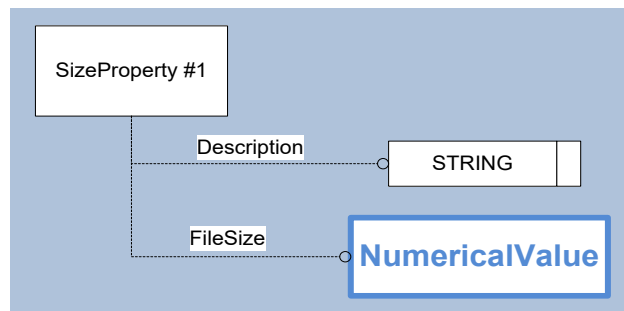


Figure 50: Template "SizeProperty"

Entity SizeProperty	Attribute type
Description	OPTIONAL DescriptorSelect
FileSize	OPTIONAL ValueWithUnit
PageCount	OPTIONAL ValueWithUnit

Table 58: "SizeProperty" Attributes

#### Attribute recommendations

- **Description:** the text or the set of texts that provides further information about the SizeProperty. The value of this attribute need not be specified. Use "Description" template (see 4.6.7).
- **FileSize:** the size of a digitally stored document. The value of this attribute need not be specified. Use "NumericalValue" template (see 4.6.9). Since the semantic is handled here by the attribute naming, use PropertyDefinitionString='file size' for FileSize.Definition.

Other attributes than these are not covered by these Recommended Practices; their use is discouraged as it would depend on mutual agreements between data exchange partners.

## The Instance Model: STEP exchange file format (ISO10303 AP242 BO Model XML syntax)

```
<Unit uid="u--000000003">
  <Kind>
    <ClassString>SI system</ClassString>
  </Kind>
  <Name>
    <ClassString>byte</ClassString>
  </Name>
  <Prefix>
    <ClassString>kilo</ClassString>
  </Prefix>
</Unit>
<File xsi:type="n0:DigitalFile" uid="df--000000001E720B30">
...
  <FileSize uid="fsp--1">
    <FileSize uid="fspp--1" xsi:type="n0:NumericalValue">
      <Definition>
        <PropertyDefinitionString>file size
property</PropertyDefinitionString>
      </Definition>
      <Name>
        <CharacterString>file size</CharacterString>
      </Name>
      <Unit uidRef=" u--000000003"/>
      <ValueComponent>2.3</ValueComponent>
    </FileSize>
  </FileSize>
...

```

### 10.5 Template “DocumentFileProperty”

In the same way that in section 9 and 9.7 of the PDM Schema Usage Guide V4.3, the aim of this section is to specify how to attach a property to a document or a file.

The PropertyValueAssignment entity represents the attachement of the DocumentDefinition or File to the value represented via the “NumericalValue” (see 4.6.9) or “StringValue” templates (see 4.6.10).

## The Instance Model: AP242 BO Model XML entities and attributes

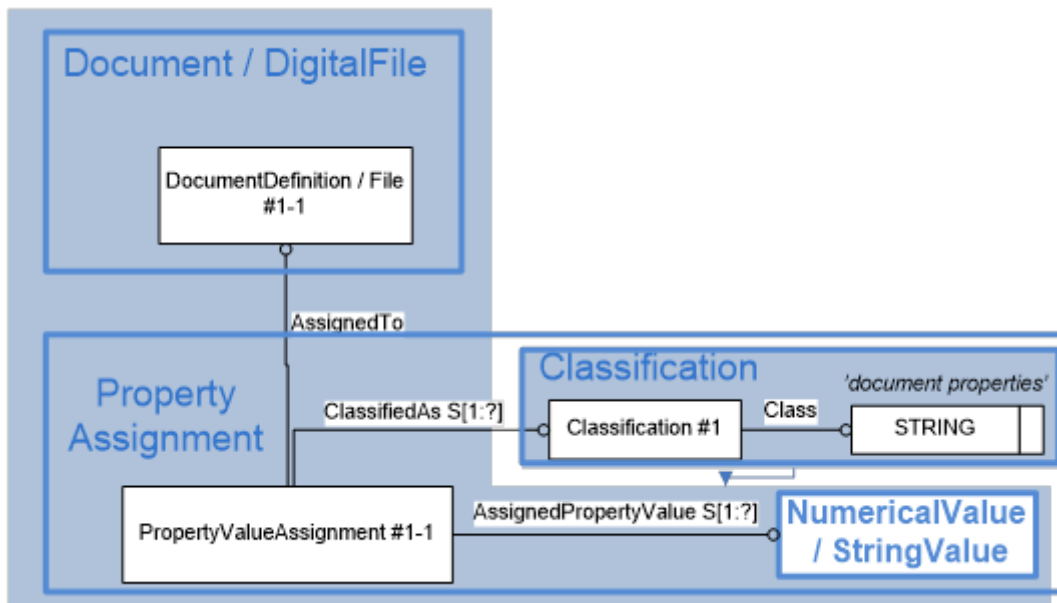


Figure 51: Template "DocumentFileProperty"

List of attributes and recommendation are similar to the PropertyAssignment template defined in chapter 6.2.

**Preprocessor Recommendations:** It is recommended that all the document properties use the same PropertyValueAssignment. The value "document properties" shall be used for ClassString in attribute PropertyAssignment.classifiedAs.class.

**Postprocessor Recommendations:** None specified.

**Related Entities:** There are no specific related entities.

## The Instance Model: STEP exchange file format (ISO10303 AP242 BO Model XML syntax)

```
<File xsi:type="n1:DigitalFile" uid="df--00000001E5A89F0">
  ...
  <PropertyValueAssignment uid="pva--00000001E5A89F0-id1">
    <AssignedPropertyValues>
      <PropertyValue uid="pv--00000001E5A89F0-id1"
xsi:type="n1:StringValue">
        <Definition>
          <PropertyDefinition uidRef="pd--000000320"/>
        </Definition>
        <Name>
          <CharacterString>checksum</CharacterString>
        </Name>
        <ValueComponent>
          <CharacterString>1582054665</CharacterString>
        </ValueComponent>
      </PropertyValue>
    </AssignedPropertyValues>
    <ClassifiedAs>
      <Classification uidRef="cla--pp"/>
    </ClassifiedAs>
  </PropertyValueAssignment>
</File>

<PropertyDefinition uid="pd--000000320">
  <Id id="quality property"/>
  <PropertyType>
    <ClassString>system property</ClassString>
  </PropertyType>
</PropertyDefinition>

<Classification uid="cla--pp">
  <Class>
    <ClassString>document properties</ClassString>
  </Class>
</Classification>
```



## 11 Document and File Association to Product Data

The scope of this section corresponds to section 10 of the PDM Schema Usage Guide V4.3.

Two alternatives are described in this chapter. Both are based on the entity DocumentAssignment (see below) and ExternalGeometricModel (see chapter 6.1).

Entity DocumentAssignment	Attribute type
AssignedDocument	AssignedDocumentSelect
ClassifiedAs	OPTIONAL SET[1:?] of Classification
Description	OPTIONAL DescriptorSelect
DocumentPortion	OPTIONAL MultiLingualStringSelect
Id	OPTIONAL IdentifierSelect
Role	ClassSelect
ActivityAssignment	OPTIONAL SET[1:?] of ActivityAssignment
ActivityMethodAssignment	OPTIONAL SET[1:?] of ActivityMethodAssignment
ApprovalAssignment	OPTIONAL SET[1:?] of ApprovalAssignment
AssignmentObjectRelationship	OPTIONAL SET[1:?] of AssignmentObjectRelationship
ConditionAssignment	OPTIONAL SET[1:?] of ConditionAssignment
DateAndPersonAssignment	OPTIONAL SET[1:?] of DateAndPersonAssignment
DateTimeAssignment	OPTIONAL SET[1:?] of DateTimeAssignment
DocumentAssignment	OPTIONAL SET[1:?] of DocumentAssignment
EffectivityAssignment	OPTIONAL SET[1:?] of EffectivityAssignment
EventAssignment	OPTIONAL SET[1:?] of EventAssignment
FrozenAssignment	OPTIONAL SET[1:?] of FrozenAssignment
ModelPropertyAssignment	OPTIONAL SET[1:?] of ModelPropertyAssignment
OrganizationOrPersonInOrganizationAssignment	OPTIONAL SET[1:?] of OrganizationOrPersonInOrganizationAssignment
PropertyDefinitionAssignment	OPTIONAL SET[1:?] of PropertyDefinitionAssignment
PropertyValueAssignment	OPTIONAL SET[1:?] of PropertyValueAssignment
SecurityClassificationAssignment	OPTIONAL SET[1:?] of SecurityClassificationAssignment
TimeIntervalAssignment	OPTIONAL SET[1:?] of TimeIntervalAssignment

Table 59: "DocumentAssignment" Attributes

### Attribute recommendations

- **AssignedDocument:** the assigned DocumentVersion or DigitalFile

- **Description:** the text or the set of texts that provides further information about the DocumentAssignment. The value of this attribute need not be specified. Use “Description” template.
- **Id:** the identifier for the DocumentAssignment. The value of this attribute need not be specified. Use IdentifierString type.
- **Role:** the meaning of the assignment. Use ClassString if one of the values below is used, otherwise use “Class” template (see 4.6.4). Where applicable, the following values shall be used:

Role	Explanation
'additional information'	The assigned document provides information that is relevant for the associated object, but is not a description of the associated object itself
'behaviour'	The assigned document specifies information about the behaviour of the associated object
'description'	The assigned document provides textual information for the associated object itself
'informative'	The assigned document may or may not be considered
'mandatory'	The associated object shall conform to the content of the assigned document. <b>This value shall be used for the file that contains the geometry of the part.</b>
'mathematical description'	The assigned document specifies the associated object by providing the algorithmic specification of its behaviour
'dimensioning standard'	The assigned document specifies the dimensioning standard

1. Other attributes than these are not covered by these Recommended Practices; their use is discouraged as it would depend on mutual agreements between data exchange partners.

As opposed to a managed 'Document as Product', an external file is not managed by the system - there is no capability for managed revision control or any document representation definitions for an external file.

If a file is under configuration control, it should be represented as a constituent of a document definition view/representation according to 'Document as Product'. In this case, it is actually the managed document that is under direct configuration control; the file is, in this way, indirectly under configuration control. A change to the file results in a change to the managed document (i.e., a new version) - the changed file would be mapped as a constituent of a view/representation definition of the new document version. A simple external reference alone is not configuration controlled; it is just an external file reference to product data.

### 11.1 Template "CAx Representation for DocumentAssignment"

This section is relevant when the files are not under configuration control.

In this case, the DocumentAssignment shall refer directly to the DigitalFile.

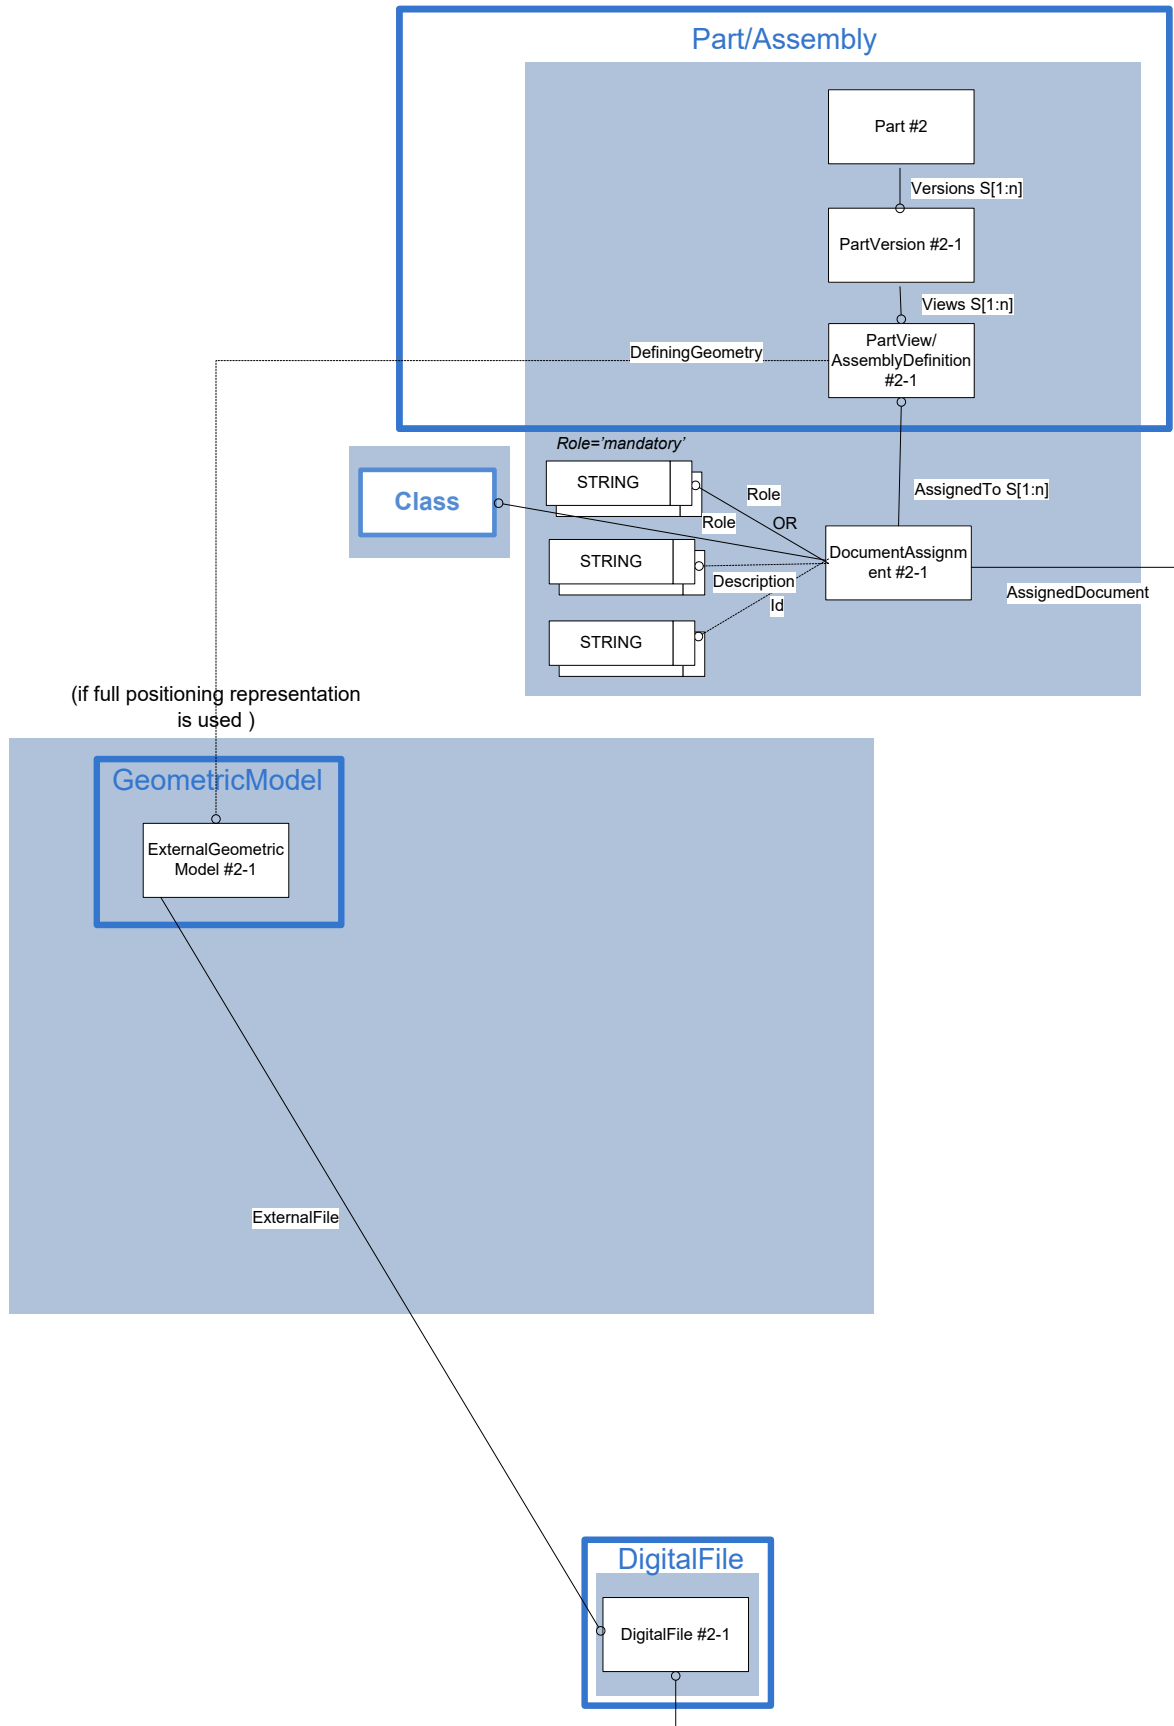


Figure 52: Template "CAx Representation for DocumentAssignment"

## The Instance Model: STEP exchange file format (ISO10303 AP242 BO Model XML syntax)

```
<Part uid="p--000000001E720B30">
  <Id>
    <Identifier uid="pid--000000001E720B30--id7" id="nut" idRoleRef=",,rl--ii" idContextRef="o--000000178"/>
  </Id>
  ...
  <Versions>
    <PartVersion uid="pv--000000001E720B30--id7">
      <Id id="/NULL"/>
      <Views>
        <PartView xsiuid="pvv--000000001E720B30--id7">
          <DefiningGeometry uidRef="egm--000000001E720B30"/>
          ...
          <DocumentAssignment xsi:type="n0:DocumentAssignment" uid="da--000000001E720B30--id7">
            <AssignedDocument uidRef="df--000000001E720B30"/>
            <Role>
              <ClassString>mandatory</ClassString>
            </Role>
          </DocumentAssignment>
        </PartView>
      </Views>
    </PartVersion>
  </Versions>
</Part>

<RepresentationContext uid="ccs-origin-nut" xsi:type="n0:GeometricCoordinateSpace">
  <Id id="/NULL"/>
  <Representations>
    <Representation uid="egm--000000001E720B30" xsi:type="n0:ExternalGeometricModel">
      <Id id="nut.stp"/>
      ...
      <ExternalFile uidRef="df--000000001E720B30"/>
    </Representation>
    ...
  </Representations>
  ...
</RepresentationContext>

<File xsi:type="n0:DigitalFile" uid="df--000000001E720B30">
  ...
  <Id>
    <Identifier uid="dfid--000000001E720B30--19" id="nut.stp" idRoleRef=",,rl--ii" idContextRef="o--000000178"/>
  </Id>
  ...
</File>
```

## ***Preprocessor Recommendations:***

Special cases: mapped compliantly to the recommendations of the PDM Usage Guide

1. Model splitting (see Figure 53 on the next page):

In case the geometry of a part is splitted into multiple DigitalFiles:

- The DigitalFile referenced by the Part has no own geometry but references the DigitalFiles via a FileRelationship of kind 'decomposition'.
- The ExternalGeometry referenced by the Part has no own geometry but references the GeometricModels via a GeneralGeometricRepresentationRelationship of kind 'decomposition'.

2. Model sharing (shared geometry):

In case a geometry is shared by several parts, the DigitalFile and the GeometricModel "containing" this geometry shall be referenced from each part.

3. Alternate Models (see Figure 54 on page 215):

In case a part has several alternative GeometricModels (DigitalFiles) each of them shall be directly connected to the Part: the first one (master geometry) via DefiningGeometry and the further ones via AuxiliaryGeometry.

For flexible parts having several geometries, depending on their occurrences, AuxiliaryGeometry shall not be used, but rather Occurrence.DefiningGeometry

Remark: the use of multiple ShapeElements attached to the same PartView via 'ShapeElement.ElementOf' is not recommended, since according to the STEP resources, there is no semantic telling that all these ShapeElements describe the complete geometry of the part. ShapeElement shall be only used to attach properties to some of the shapes of the geometry (see 6.3.1).

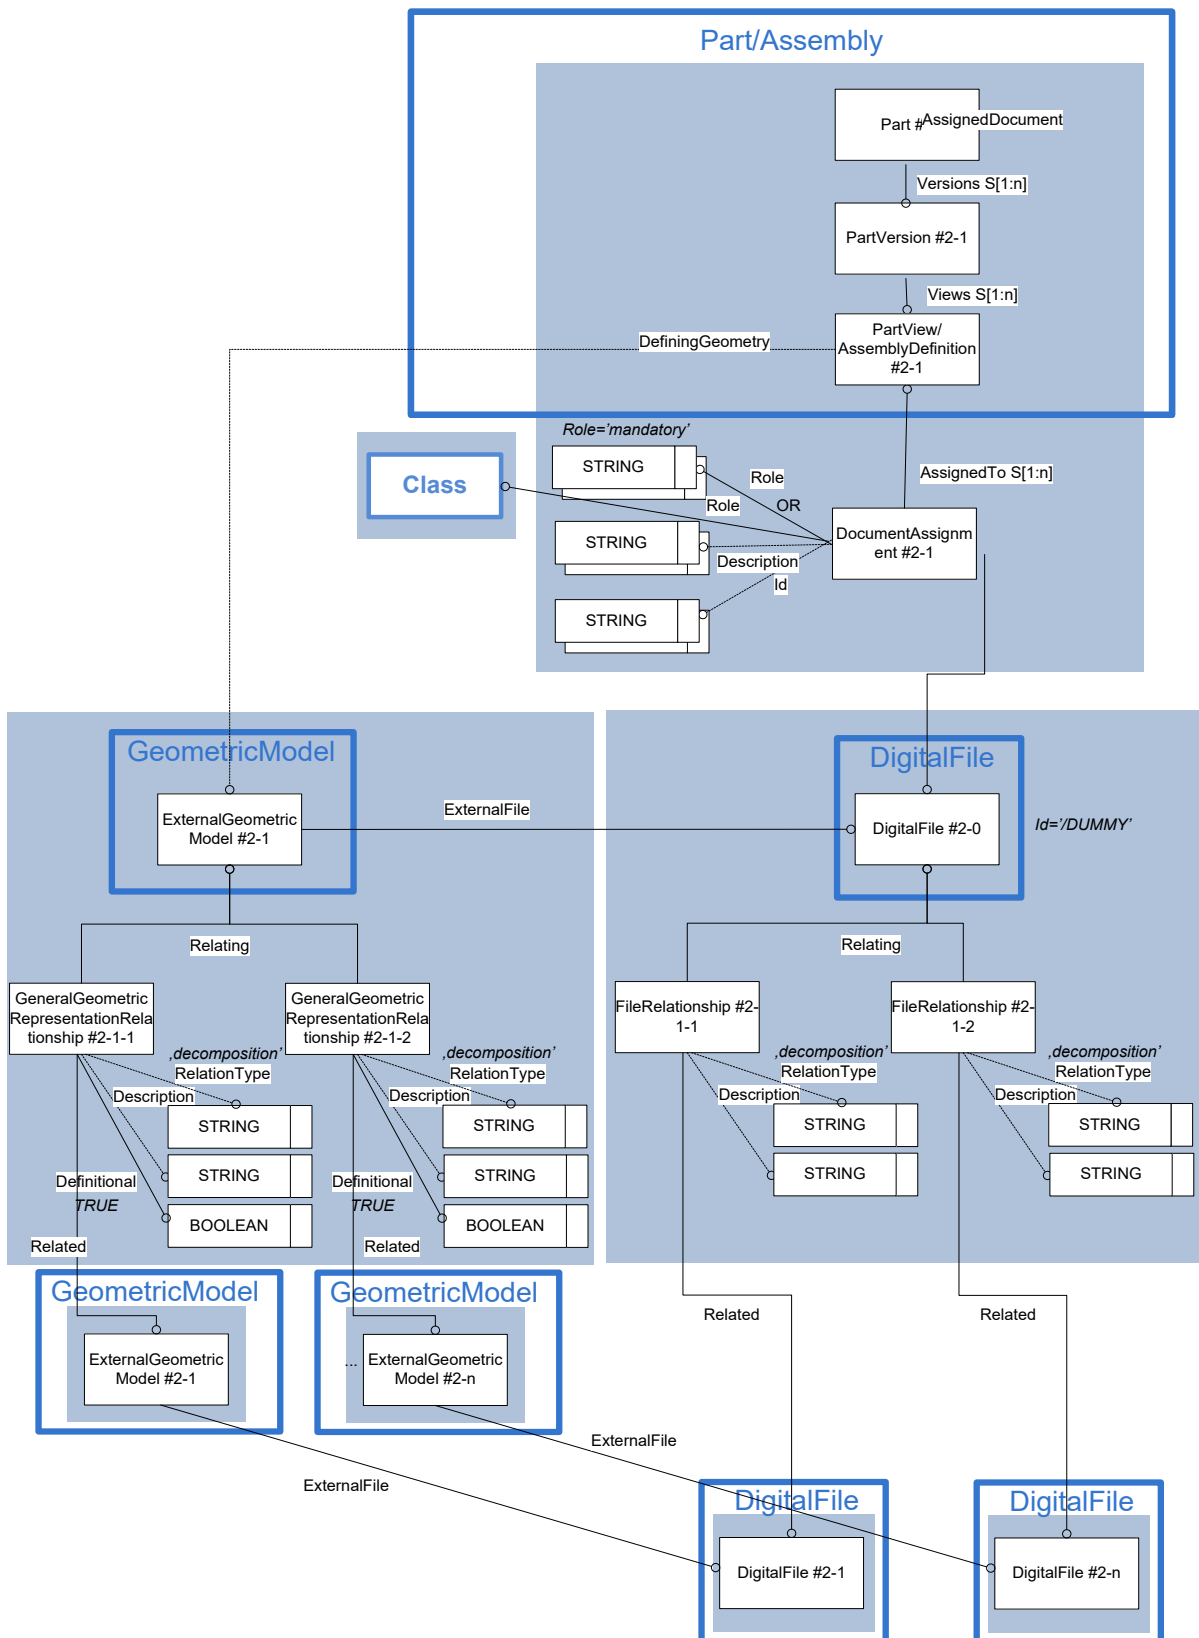


Figure 53: Model splitting for "CAX Representation for DocumentAssignment"

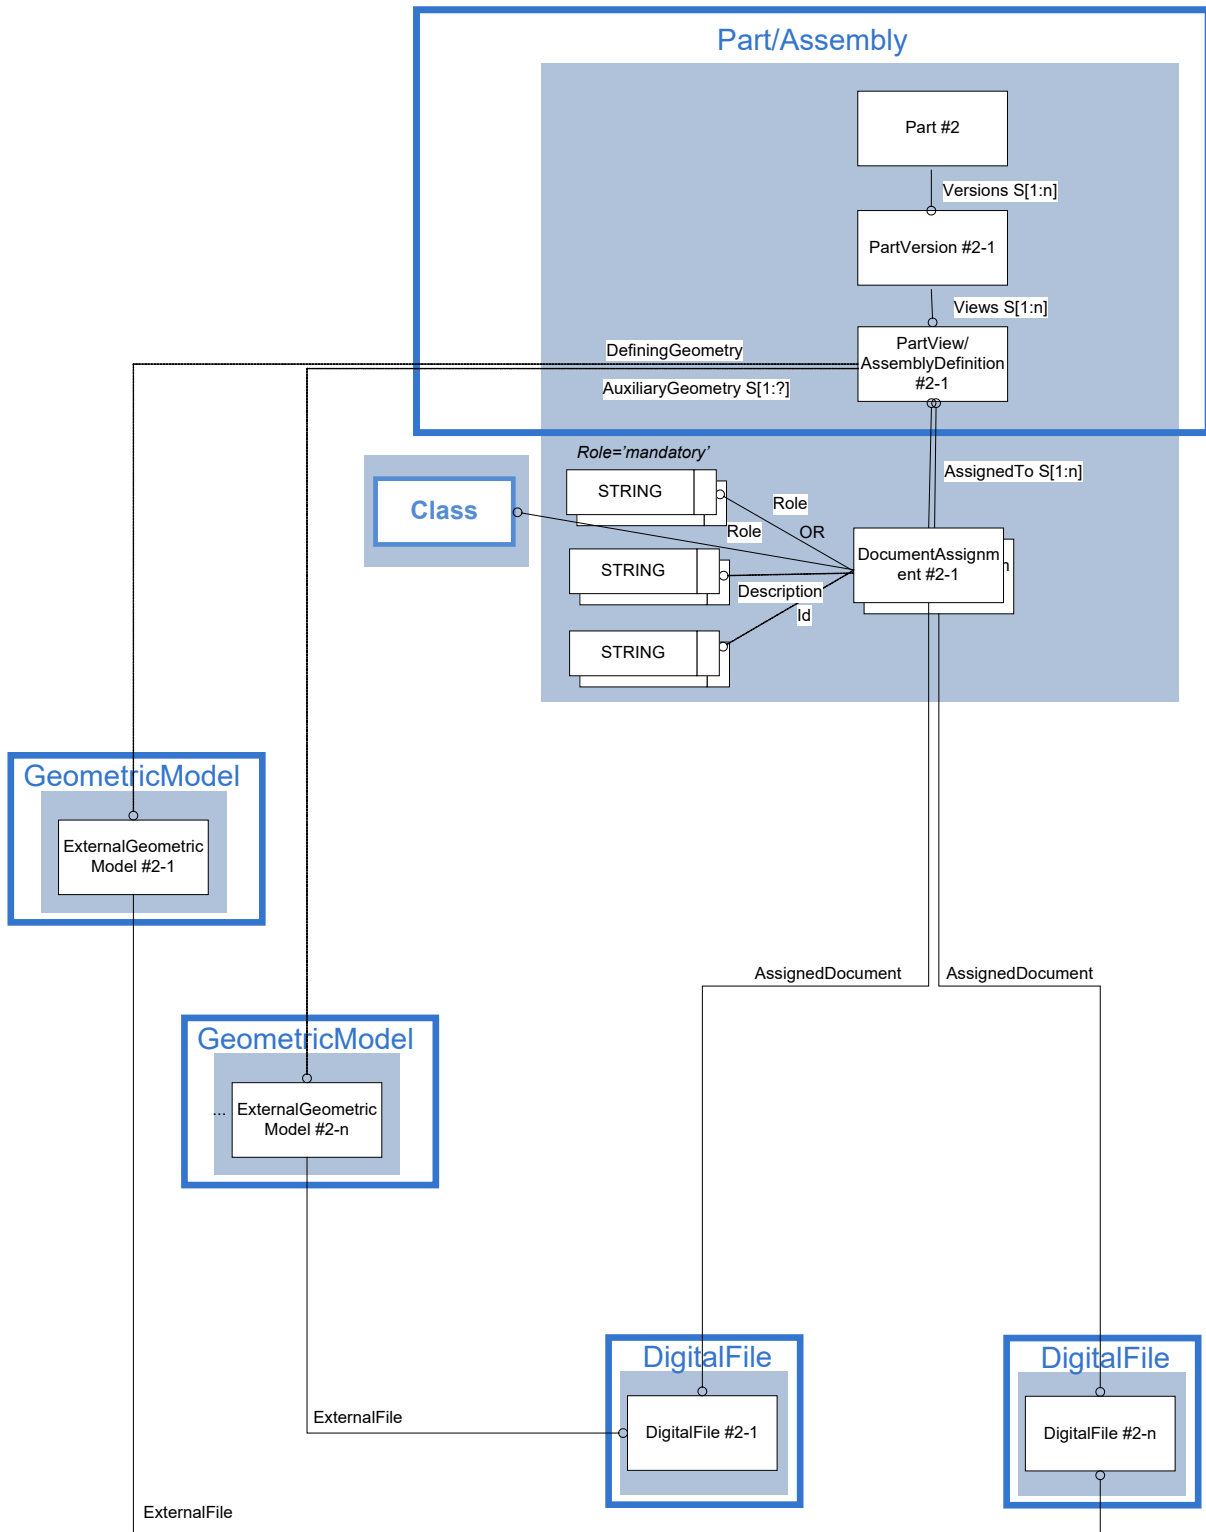


Figure 54: Alternate models for "CAx Representation for DocumentAssignment"

## **11.2 Template "PDM Representation for DocumentAssignment"**

This section is relevant when the files are under configuration control.

Depending on the originating PDM System and its respective user settings, DocumentVersion and PartVersion may be handled independently, or in a linked manner. In an exchange scenario, the involved parties have to agree on what a new DocumentVersion means, whether it triggers a new PartVersion or not, and vice versa.



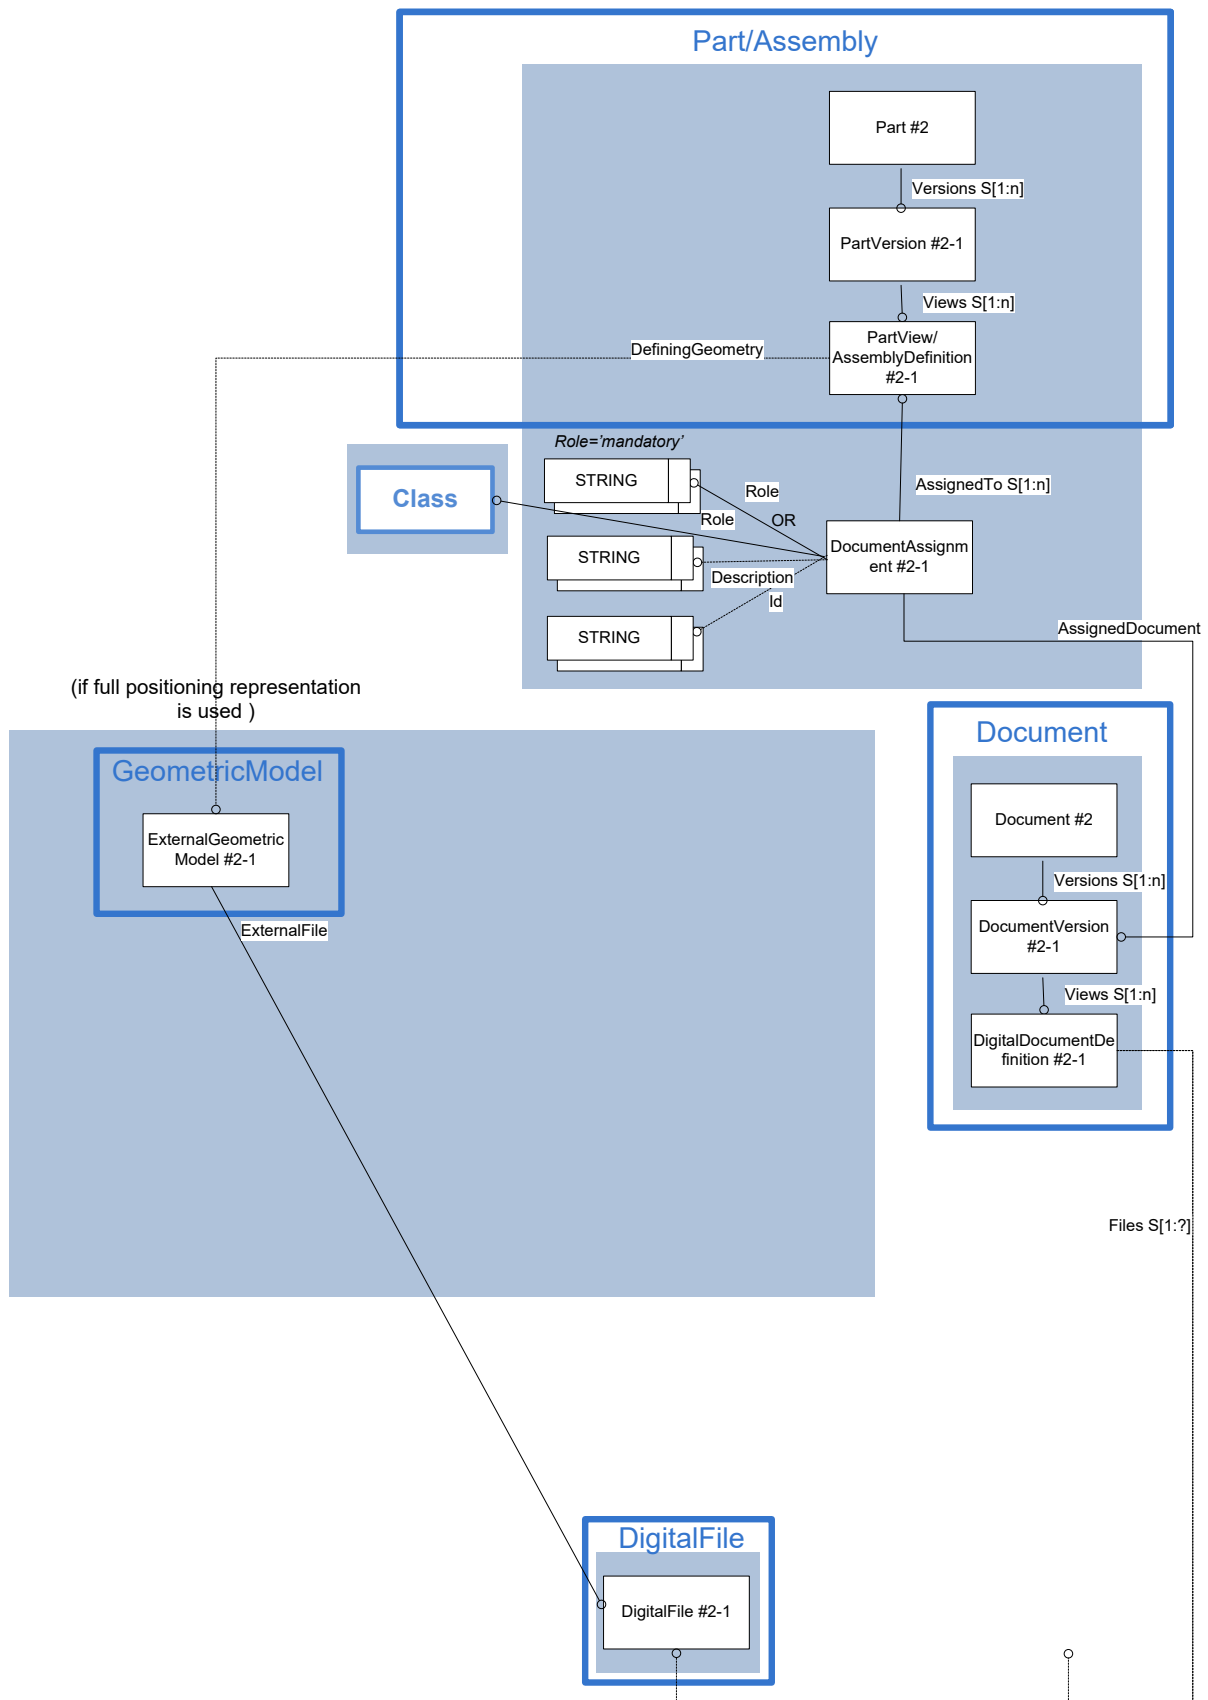


Figure 55: Template "PDM Representation for DocumentAssignment"

## The Instance Model: STEP exchange file format (ISO10303 AP242 BO Model XML syntax)

```
<Part uid="p--000000001EAAE870">
  <Id>
    <Identifier uid="pid--000000001EAAE870--id7" id="nut" idRoleRef=„rl--
ii" idContextRef="o--000000178"/>
  </Id>
  ...
  <Versions>
    <PartVersion uid="pv--000000001EAAE870--id7">
      <Id id="/NULL"/>
      <Views>
        <PartView uid="pvv--000000001EAAE870--id7">
          <DefiningGeometry uidRef="egm--000000001AA415B0"/>
          ...
          <DocumentAssignment xsi:type="n0:DocumentAssignment" uid="da--
000000001EAAE870--id7">
            <AssignedDocument uidRef="dv--000000001EAAE870"/>
            <Role>
              <ClassString>mandatory</ClassString>
            </Role>
          </DocumentAssignment>
        </PartView>
      </Views>
    </PartVersion>
  </Versions>
</Part>

<RepresentationContext uid="ccs--origin-nut" xsi:type="n0:GeometricCoordi-
nateSpace">
  <Id id="/NULL"/>
  <Representations>
    <Representation uid="egm--000000001AA415B0"
xsi:type="n0:ExternalGeometricModel">
      <Id id="nut.stp"/>
      ...
      <ExternalFile uidRef="df--000000001EAAE870"/>
    </Representation>
    ...
  </Representations>
  ...
</RepresentationContext>

<Document uid="doc--000000001EAAE870">
  ...
  <Id>
    <Identifier uid="docid--000000001EAAE870--id7" id="nut" idRoleRef=„rl--
ii" idContextRef="o--000000178"/>
  </Id>
  ...
  <Versions>
    <DocumentVersion uid="dv--000000001EAAE870">
      <Id id="/NULL"/>
    </DocumentVersion>
  </Versions>
</Document>
```

```
<Views>
  <DocumentDefinition uid="ddd--000000001EAAE870"
xsi:type="n0:DigitalDocumentDefinition">
  <Id id="/NULL"/>
  <Files>
    <DigitalFile uidRef="df--000000001EAAE870"/>
  </Files>
  </DocumentDefinition>
</Views>
</DocumentVersion>
</Versions>
</Document>
<File xsi:type="n0:DigitalFile" uid="df--000000001EAAE870">
...
  <Id>
    <Identifier uid="dfid--000000001EAAE870--19" id="nut.stp"
idRoleRef="„rl--ii" idContextRef="o--000000178"/>
  </Id>
  ...
</File>
```

### **Preprocessor Recommendations:**

4. The DocumentAssignment shall refer to the DocumentVersion, rather than Document or DigitalDocumentDefinition.
5. If all DigitalFiles associated to a DocumentDefinition have the same value for their Type, Content, Creation and Format properties, these can be stored in DocumentContent, DocumentCreation and DocumentFormat rather than redundantly in each DigitalFile as FileContent, FileCreation and FileFormat.
6. Special cases: mapped compliantly to the recommendations of the PDM Usage Guide
1. Model splitting:
  - The Document referenced by the Part has no own geometry, but references the Documents via a DocumentDefinitionRelationship of kind 'decomposition'.
  - The ExternalGeometry referenced by the Part has no own geometry, but references the GeometricModels via a GeneralGeometricRepresentationRelationship of kind 'decomposition'.

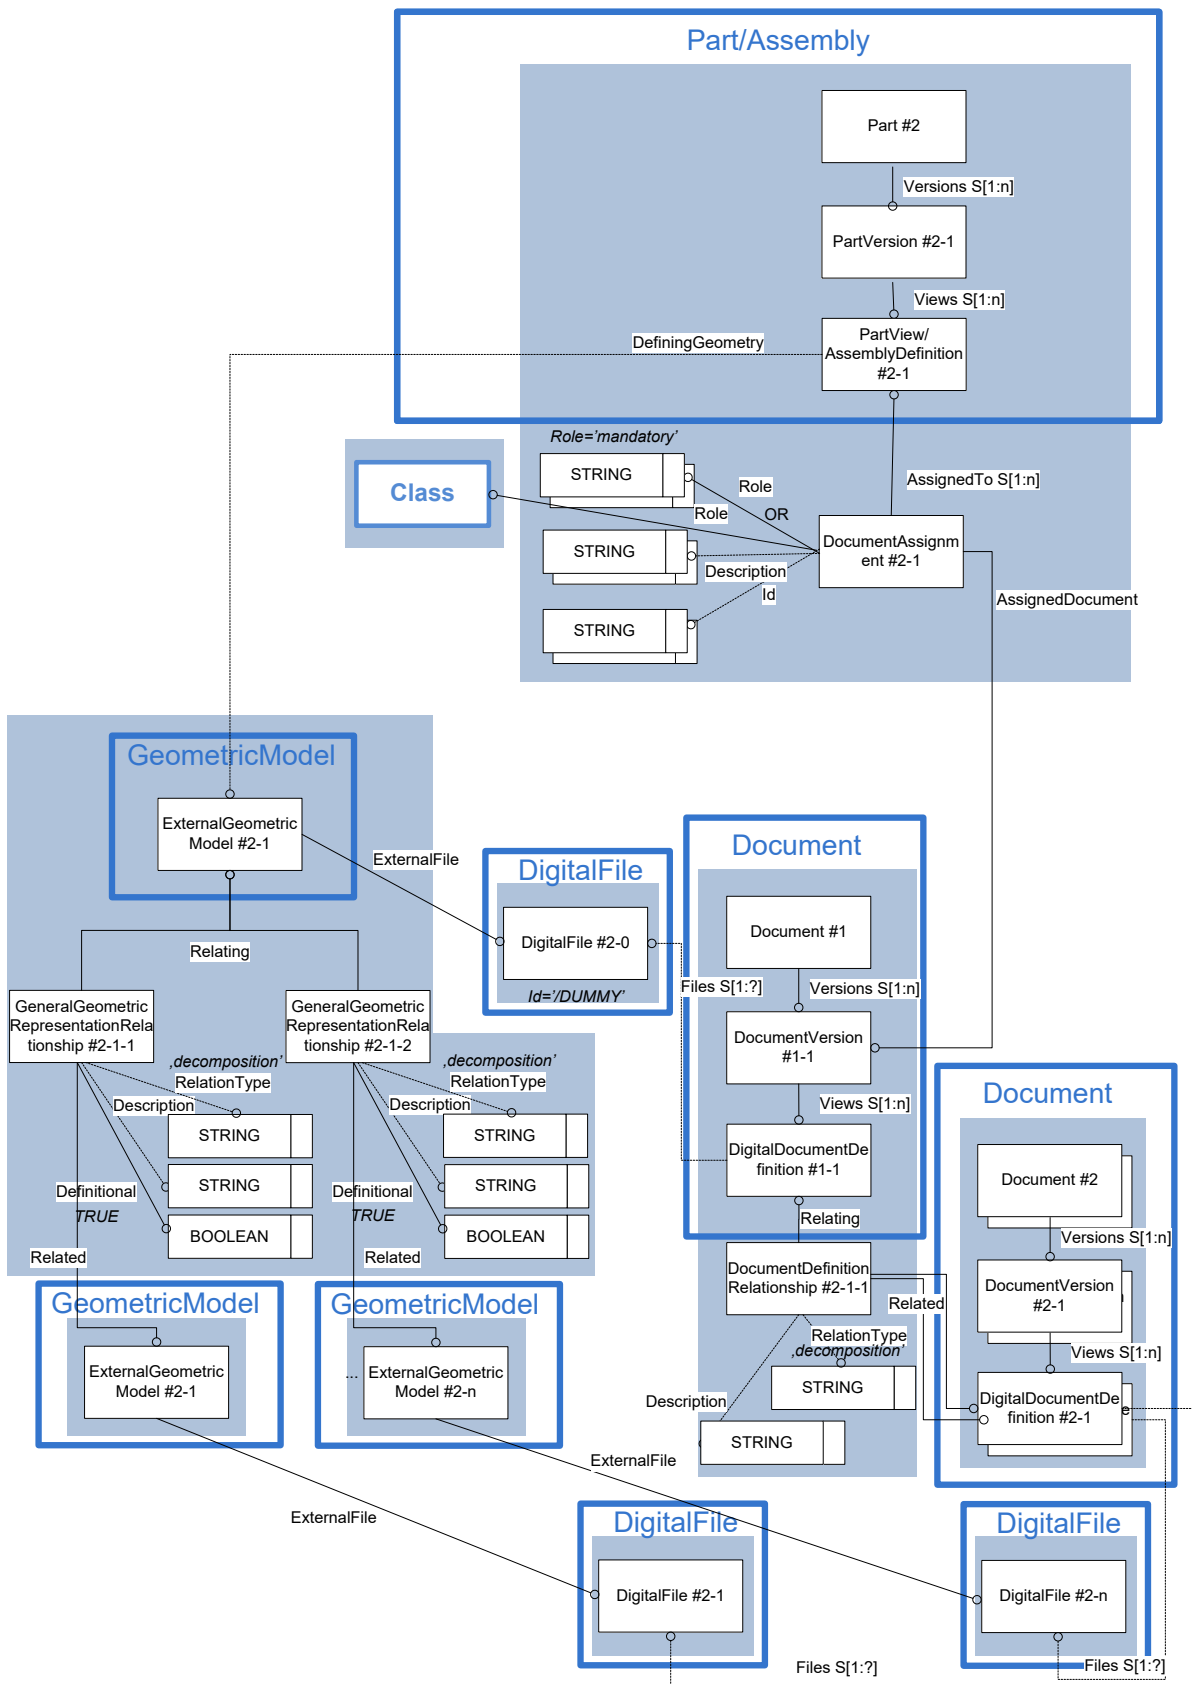


Figure 56: Model splitting for "PDM Representation for DocumentAssignment"

Remark: the use of multiple ShapeElements attached to the same PartView via 'ShapeElement.ElementOf' is not recommended, since according to the STEP resources, there is no semantic telling that all these ShapeElements describe the complete geometry of the part. ShapeElement shall be only used to attach properties to some of the shapes of the geometry (see 6.3.1).

2. Document sharing (shared geometry):

In case a document is shared by several parts, the Document and the GeometricModel "containing" this geometry shall be referenced from each part.

3. Alternate Models:

In case a part has several alternative GeometricModels (Documents) each of them shall be directly connected to the Part: the first one (master geometry) via DefiningGeometry and the further ones via AuxiliaryGeometry.

The document containing the master geometry and the document containing the alternative geometry shall be related via a DocumentDefinitionRelationship with RelationType='derivation'.

The DocumentType of the document containing the master geometry shall be 'primary geometry' while for the alternative geometries, the DocumentType shall be 'secondary geometry'.

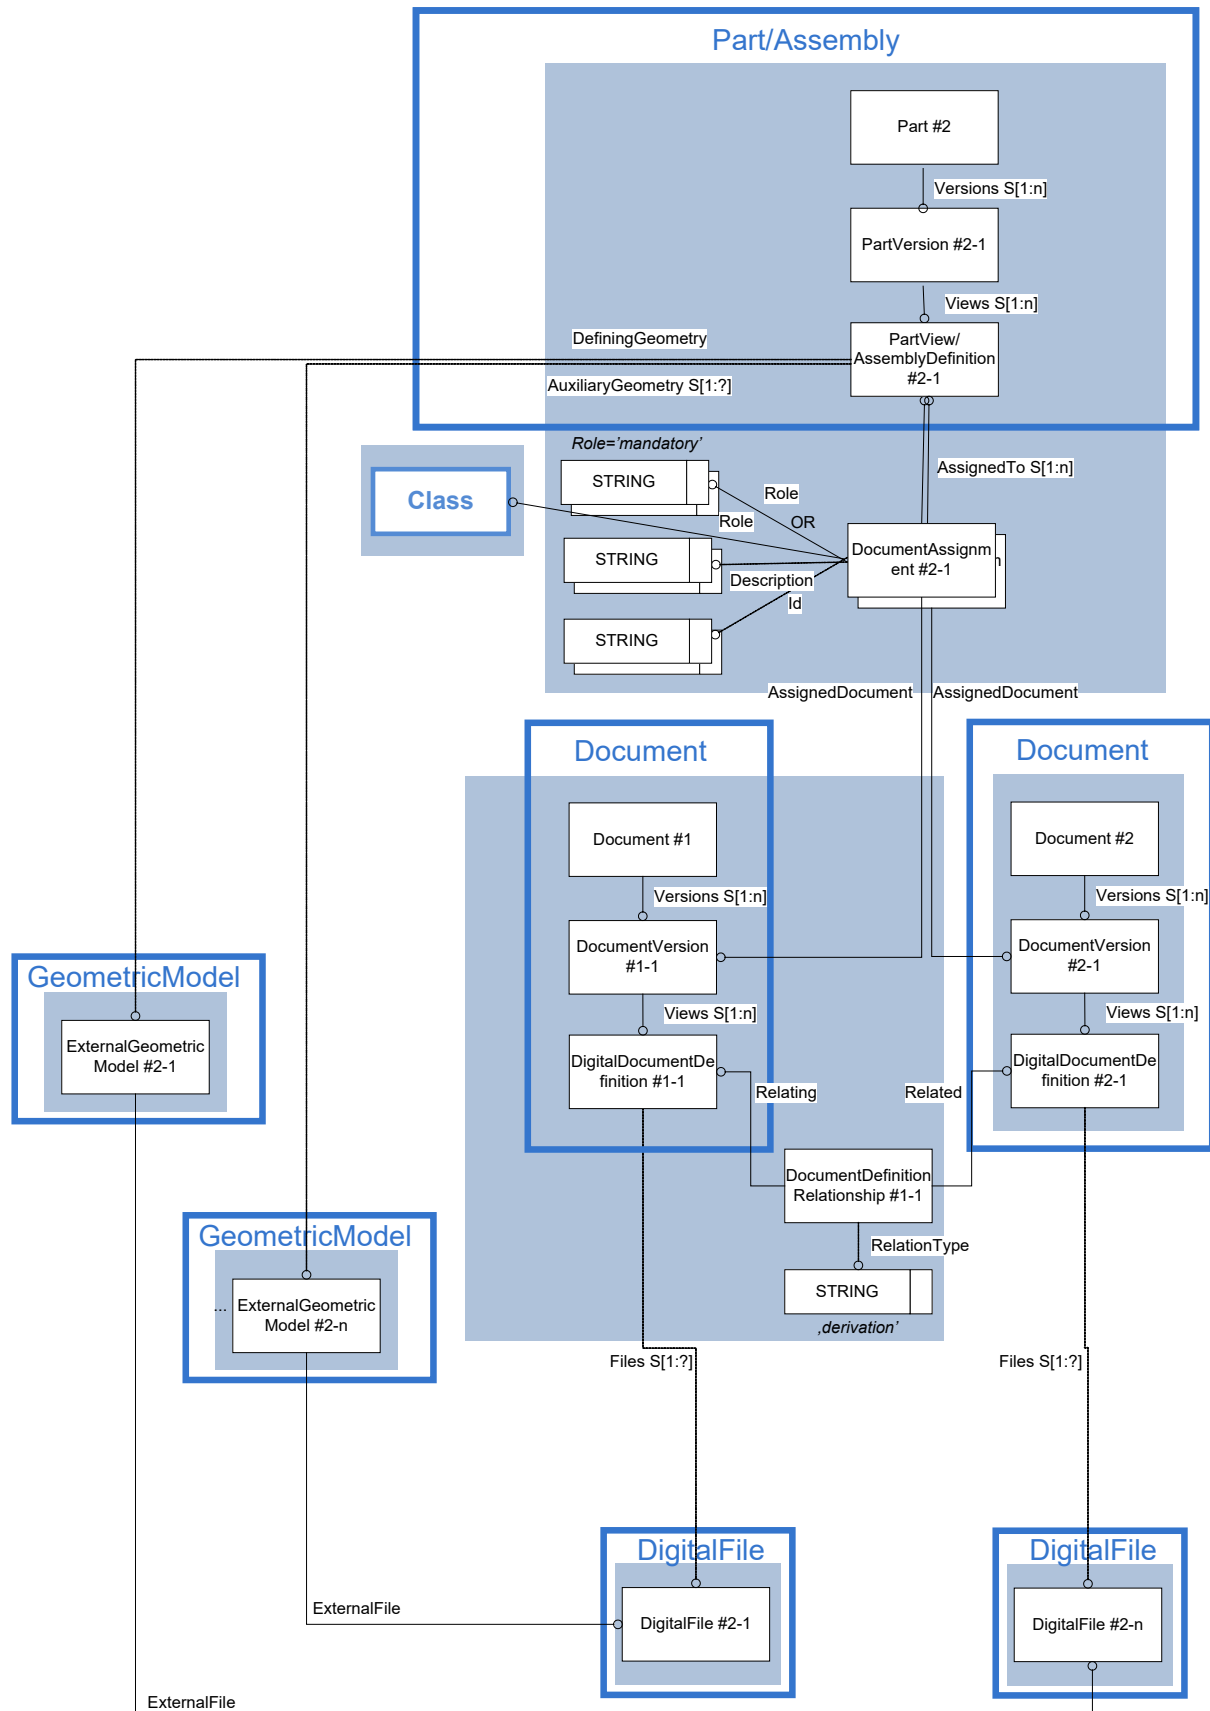


Figure 57: Alternate models for "PDM Representation for DocumentAssignment"

## 12 PDM Properties and CAD User-Defined Attributes

In the same way that in the CAX-IF Recommended Practices for User Defined Attributes V1.2, the aim of this section is to specify how to transfer:

- PDM type properties
- PDM system properties
- user defined attributes (UDA's) in Computer Aided Design (CAD) systems

### 12.1 Fundamental concepts

The approach used to transfer PDM properties and user defined attributes is the “general property” approach introduced in Part 41. It is based on the concept that an attribute (the key in a key-value pair) is defined once as a placeholder and is then used to assign the actual values to the respective target elements as often as needed.

The reference points in a STEP file for which such an attribute shall be defined in the given context are:

- the entire part (`Part`, `AssemblyDefinition` or `PartView`) using “Property-ValueAssignment” template (see 6.2)
- an instance of the part in an assembly (`NextAssemblyOccurrenceUsage`) using `PropertyValueAssignment` template (see 6.2)
- a part view relationship in an assembly (`PartViewRelationship`) using `PropertyValueAssignment` template (see 6.2)
- a portion of the shape defining the part (`Part`, `AssemblyDefinition` or `PartView`) using `GeneralShapeDependentProperty` template (see 6.3)
- the entire document (`DocumentDefinition`) according to section 10.5
- a single file (`DigitalFile`) according to section 10.5

We will refer to these reference points as “Model Element” in figures below.

#### ***Preprocessor Recommendations:***

- Even if `PropertyValueAssignments` may be assigned to further related objects (like `Occurrence`, `PartVersion`, `DocumentVersion`, ...), in order to reduce the complexity of the postprocessor implementation, only assignments to the objects mentioned above are recommended.

There are a number of pre-defined property types in STEP that may be used to store a PDM property or a user-defined attribute. In the context of this document, this includes:

- descriptive attributes (« `StringValue` » template see 4.6.10)
  - name and description
- measure values (“`NumericalValue`” template see 4.6.9)
  - name and value
  - name, value and unit

## 12.2 Template “PropertyDefinition”

The `PropertyDefinition` defines a PDM property or a user defined attribute. This can then be used by one or several `PropertyValues`.

To assign a `PropertyDefinition`:

- create a `PropertyValue` with the “`NumericalValue`” (see 4.6.9) or “`StringValue`” templates (see 4.6.10).
- in the “`NumericalValue`” or “`StringValue`” template, link the `PropertyValue` to the `PropertyDefinition` with `PropertyValue.Definition` attribute.

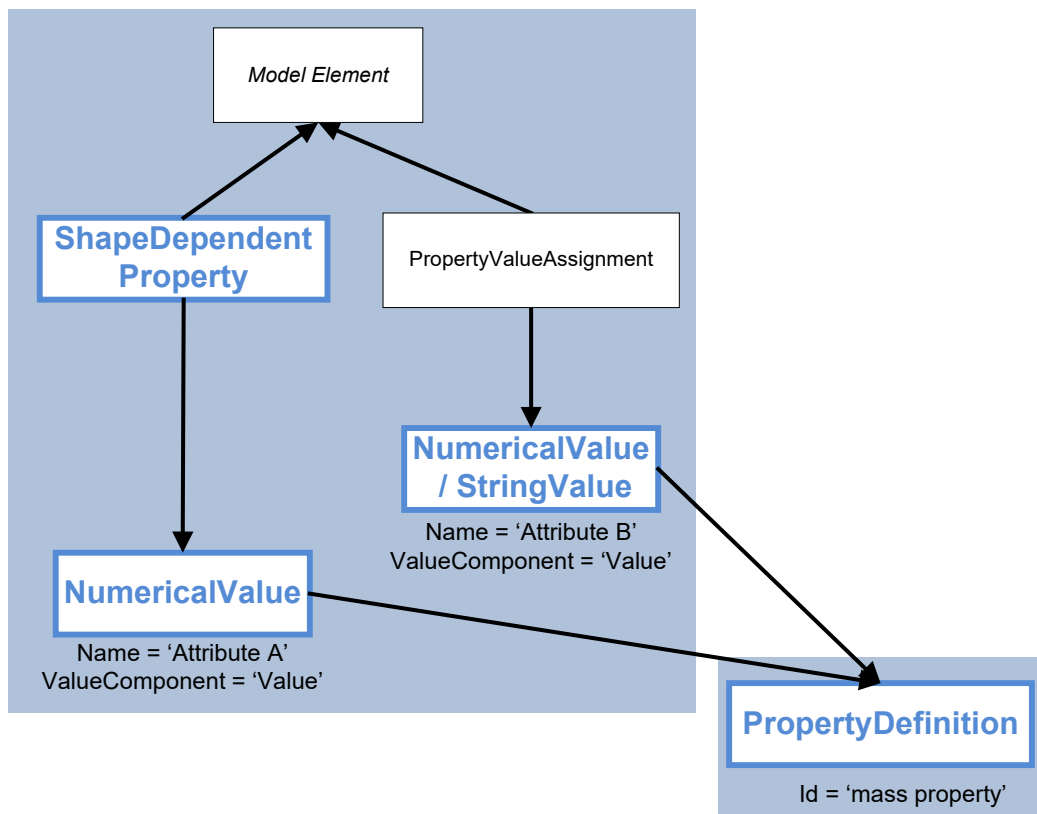


Figure 58: Definition of an attribute name and its usage

## The Instance Model: AP242 BO Model XML entities and attributes



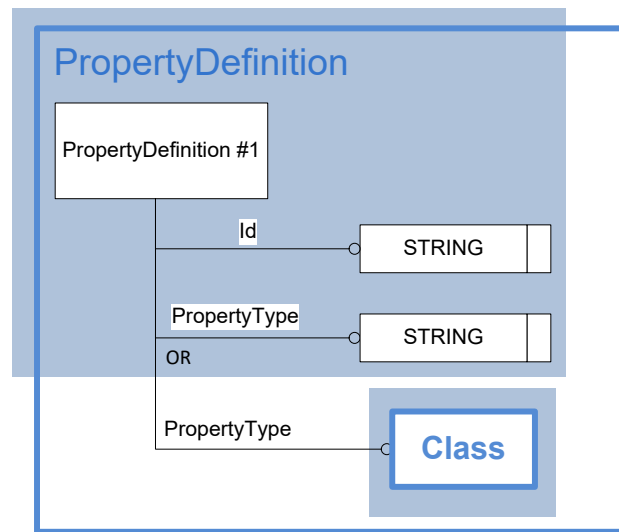


Figure 59: Template "PropertyDefinition"

ENTITY PropertyDefinition	Attribute Type
AllowedUnits	OPTIONAL SET[1:?] of UnitSelect
ClassifiedAs	OPTIONAL SET[1:?] of Classification
Description	OPTIONAL DescriptorSelect
Id	IdentifierSelect
PropertyType	ClassSelect
VersionId	OPTIONAL IdentifierSelect
ApprovalAssignment	OPTIONAL SET[1:?] of ApprovalAssignment
DateAndPersonAssignment	OPTIONAL SET[1:?] of DateAndPersonAssignment
DateTimeAssignment	OPTIONAL SET[1:?] of DateTimeAssignment
DocumentAssignment	OPTIONAL SET[1:?] of DocumentAssignment
EffectivityAssignment	OPTIONAL SET[1:?] of EffectivityAssignment
EventAssignment	OPTIONAL SET[1:?] of EventAssignment
InformationUsageRightAssignment	OPTIONAL SET[1:?] of InformationUsageRightAssignment
OrganizationOrPersonInOrganizationAssignment	OPTIONAL SET[1:?] of OrganizationOrPersonInOrganizationAssignment
PropertyDefinitionRelationship	OPTIONAL SET[1:?] of PropertyDefinitionRelationship
SecurityClassificationAssignment	OPTIONAL SET[1:?] of SecurityClassificationAssignment
TimeIntervalAssignment	OPTIONAL SET[1:?] of TimeIntervalAssignment

Table 60: "PropertyDefinition" Attributes

### Attribute recommendations

- The **Id** attribute is the text that represents the general property. Use IdentifierString if one of the values below is used, otherwise use “Identifier” template (see 4.6.6).

When applicable, the following values shall be used:

Id	Explanation
'recyclability property'	A recyclability property is information concerning the ability to re-use objects or components of objects after their primarily intended usage
'mass property'	a mass property is a quantity of matter of which an object consists
'quality property'	A quality property is a property that provides information about the level of quality of products or processes
'cost property'	A cost property is a property that specifies costs
'duration property'	A duration property is a property that specifies a period of time during which a given object is used or will last
'general property'	A general property is a property for which the exact purpose is not known at the time. This is the recommended value for the case an exporting system does not provide such a classification of properties by purpose.

- The **PropertyType** attribute is the kind of property the **PropertyDefinition** defines. Use “Class” template (see 4.6.4). When applicable, the following values shall be used. If one of these values apply, use ClassString:

PropertyType	Explanation
'system property'	The property is internal to the source PDM system and may be mostly ignored by the target PDM system, except in scenarios to maintain the full functionality of the transferred data Example: PDM vault, lifecycle template, ...
'PDM property'	The property is defined with COTS solution. Relevant for PDM data exchange. Example: calculated weight, estimated weight, material standard, ...
'customized PDM property'	The property is present only on particular categories of part (for example standard part, software part, ...) or documents customized in the underlying PDM system. The part/document category itself is mapped in PartTypes/DocumentTypes (see 5.1.1/8.1.1). Relevant for PDM data exchange. Example: software characteristics, ...
'user defined attribute'	The property is defined by a particular user on a specific object and does not exist for all instances of the PDM object. Relevant for the CAx data exchange, and (if the PDM system can handle them) for PDM data exchange Example: surface finish

- For the properties defined in section 0 (validation properties), the following values shall be used:

PropertyType	Explanation
assembly validation property	According to section 13.1.1 + 13.1.2
geometric validation property	According to section 13.2.1

- Other attributes than these are not covered by these Recommended Practices; their use is discouraged as it would depend on mutual agreements between data exchange partners.

**Preprocessor Recommendations:** If the Preprocessor does not support grouping of properties (see section 12.3) nor metadata to the user defined attributes (see section 12.6), rather use PropertyDefinitionString and set it with the PropertyType.

**Postprocessor Recommendations:** None specified.

**Related Entities:** There are no specific related entities.

## The Instance Model: STEP exchange file format (ISO10303 AP242 BO Model XML syntax)

```
<PropertyValue uid="id1" xsi:type="ap:NumericalValue">
  <Definition>
    <PropertyDefinition uidRef="pd--000000320"/>
  </Definition>
  <Name>
    <CharacterString>angle</CharacterString>
  </Name>
  <Unit uidRef="u--000000002"/>
  <ValueComponent>45</ValueComponent>
</PropertyValue>
```

```
<PropertyDefinition uid="pd--000000320">
  <Id id="quality property"/>
  <PropertyType>
    <ClassString>user defined attribute</ClassString>
  </PropertyType>
</PropertyDefinition>
```

or:

```
<PropertyValue uid="id1" xsi:type="ap:NumericalValue">
  <Definition>
    <PropertyDefinitionString>user defined attribute</PropertyDefini-
tionString>
  </Definition>
  <Name>
    <CharacterString>angle</CharacterString>
  </Name>
  <Unit uidRef="u--000000002"/>
  <ValueComponent>45</ValueComponent>
</PropertyValue>
```

### 12.3 Group of attributes and group of attributes values

In the same way that in section 5.2 of the CAX-IF Recommended Practices for User Defined Attributes V1.2, the aim of this section is to group user defined attributes on two semantic levels:

- **Groups of attributes**

**Note** that systems handling user attributes in a way that all attributes with the same name have the same meaning may also define groups on this level. This level of grouping is listed here for completeness. In the context of the CAX-IF, groups of attributes will always be defined on the attribute level, see section below.

To define a group of attributes in the sense that this grouping shall also be applied to all values of the respective attributes (e.g. the calculated weight, nominal weight and actual weight of a part), a `PropertyDefinition` will be created for that group, carrying the name of the group, and relating all `PropertyDefinition` instances, which are members of the group.

The following rules apply to the `PropertyDefinitionRelationship` attribute values:

- `Relating` : the `PropertyDefinition` that defines the group of attributes
- `Related` : the `PropertyDefinition` that defines an attribute in that group
- `RelationType` : 'decomposition'

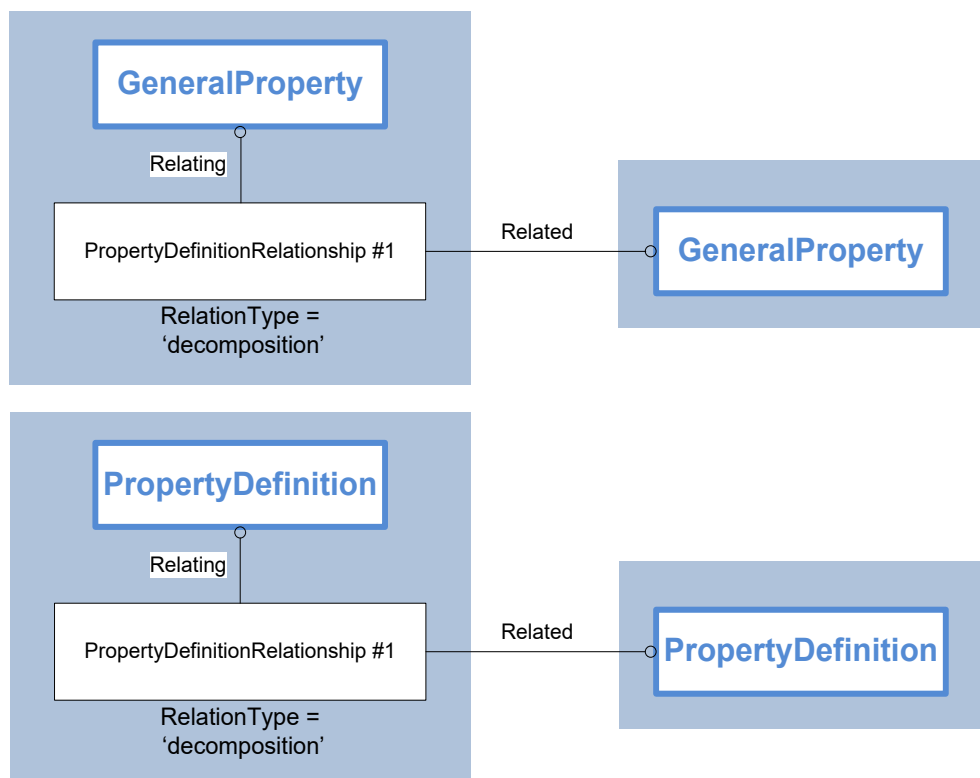


Figure 60: Defining a group of attributes

**Preprocessor Recommendations:**

- As defined in the EXPRESS data model via a WHERE rule, the related `PropertyDefinition` and the relating `PropertyDefinition` shall be different objects.

- **Groups of attribute values**

The approach to define a group of attribute values – i.e. which apply to the specific use of the respective attributes – is quite similar to the grouping of attributes themselves, only it will now happen on the `PropertyValue` level.

All `PropertyValue` – the one defining the group and all of the ones defining the attribute values – need to reference the same model element.

This means that only values for the same model element can be grouped.

The following rules apply to the `PropertyValueRelationship` attributes:

- `Relating` : the `PropertyValue` that defines the group of attribute values
- `Related` : the `PropertyValue` that defines an attribute value in that group
- `RelationType` : 'decomposition'

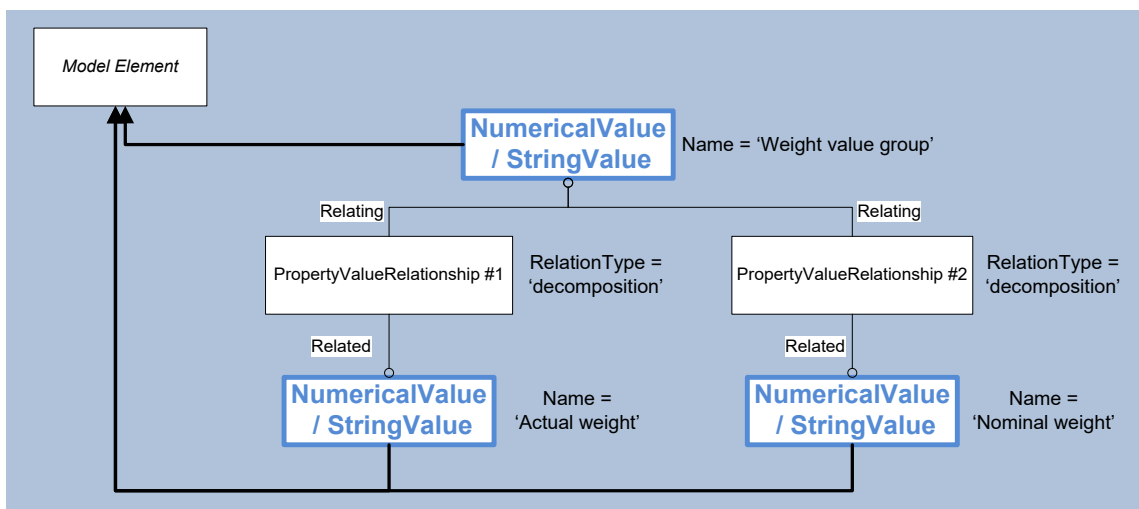


Figure 61: Defining a group of attribute values

**Preprocessor Recommendations:**

- As defined in the EXPRESS data model via a WHERE rule, the related `PropertyValue` and the relating `PropertyValue` shall be different objects.

## 12.4 Specifying the target for the attribute

User defined attributes can be attached to the geometry in a STEP file at different levels of granularity, i.e. individual solids or surfaces, or entire parts. While all CAD systems support the definition of attributes at the part level, only some systems can handle attributes at the level of individual shape elements.

### 12.4.1 Attributes at the part level

To assign a user defined attribute to both individual parts and assemblies, it is recommended to use “PropertyAssignment” template defined in chapter 6.2.

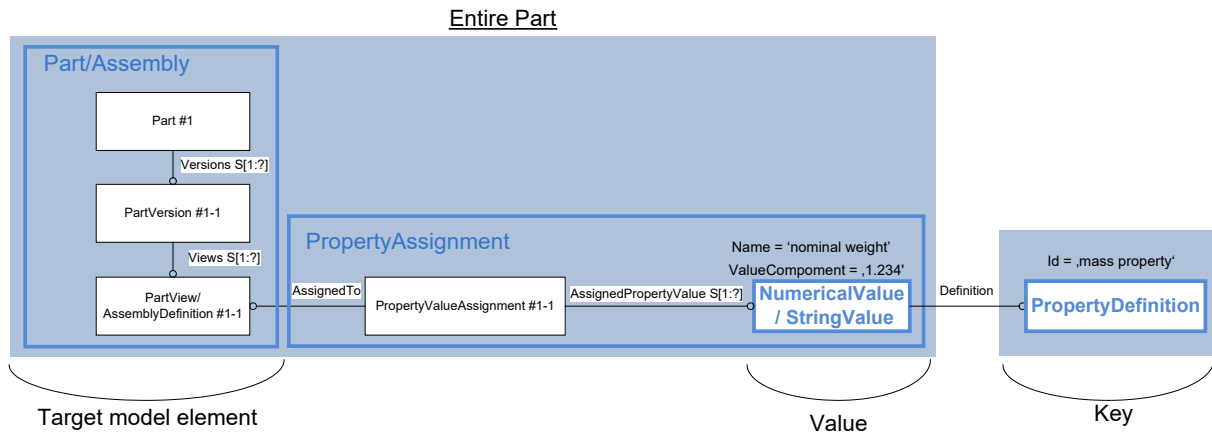


Figure 62: User defined attribute at the part/assembly level

### 12.4.2 Attributes at component instances in an assembly

To assign a user defined attribute to a specific instance of a component within an assembly, the property needs to be attached to the assembly definition. If the instance in question is an immediate child of the assembly node, the attribute will be attached to the `NextAssemblyOccurrenceUsage`, it is recommended to use “PropertyAssignment” template defined in chapter 6.2 directly in the `NextAssemblyOccurrenceUsage` entity.

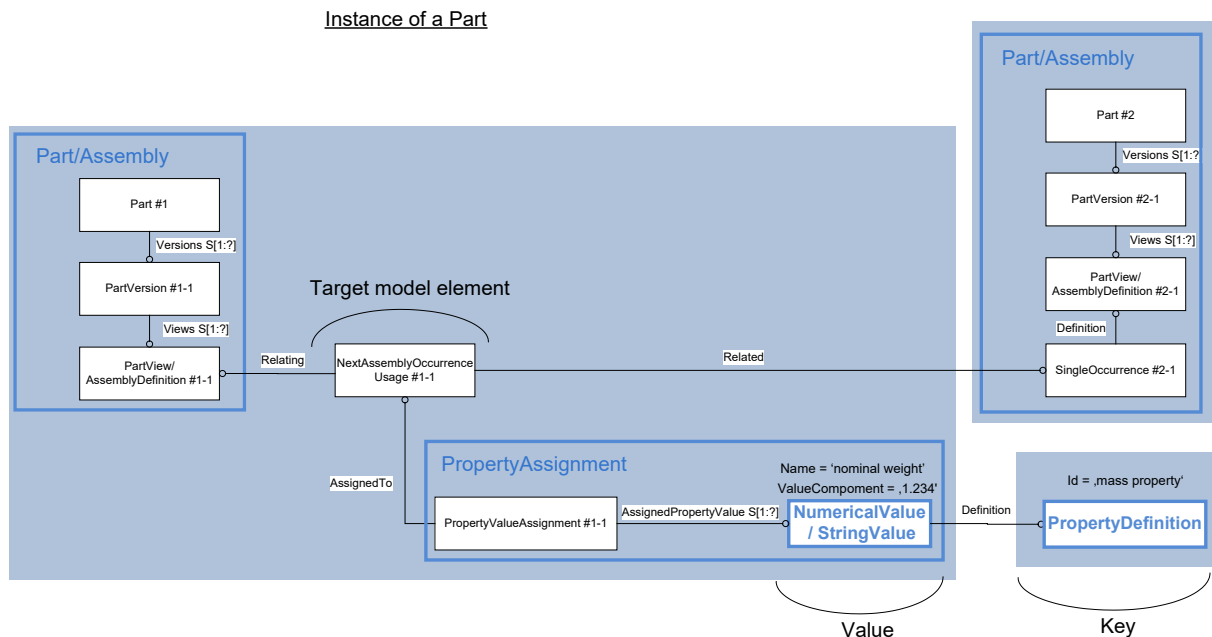


Figure 63: User defined attribute for a simple component instance in an assembly

### 12.4.3 Attributes at the shape level

To assign a user defined attribute to a shape or a portion of a part shape, it is recommended to use “ShapeDependentProperty” template defined in chapter 6.3.

*Remark: The use of subtypes of ShapeElement is not recommended.*

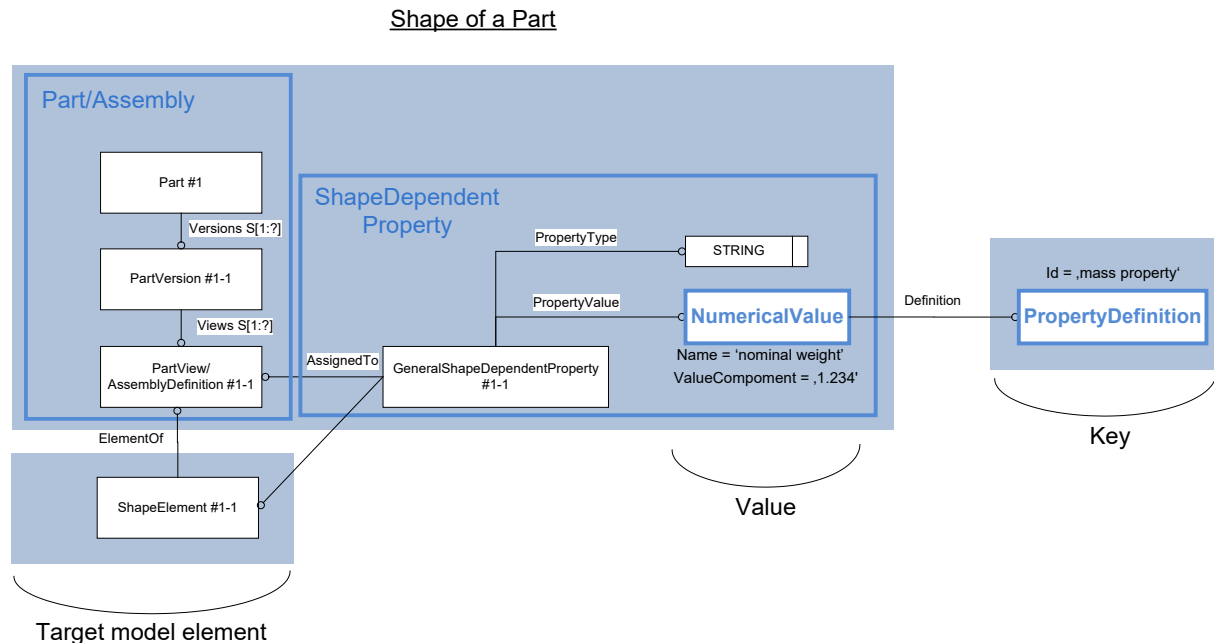


Figure 64: User defined attribute for a shape or a portion of shape

### 12.5 Definition of attribute value

In the same way that in section 7 of the CAx-IF Recommended Practices for User Defined Attributes V1.2, the aim of this section is set up a property value for a property.

If the Preprocessor does not support grouping of attributes (see section 12.3) nor metadata to the use defined attributes (see section 12.6), it is recommended to set PropertyValue.Definition with PropertyDefinitionString and set it with the PropertyType. Otherwise, it is recommended to use the template for PropertyDefinition shown in 12.2.

There are two types of values:

- Values with unit (e.g., measure values)
- Values without unit (String, Integer, Real, Boolean)

#### 12.5.1 Values with Unit

A value attribute transports a general value with an associated unit. To define a value attribute, the “NumericalValue” template defined in chapter 4.6.9. is used.

**Note** that NumericalValue is a subtype of ValueWithUnit, hence the definition of a unit is mandatory. For transfer of values without applicable unit, see section below.

Example of use of the “NumericalValue” template:

```
<PropertyValue uid="id1" xsi:type="ap:NumericalValue">
  <Definition>
    <PropertyDefinition uidRef="pd--000000320"/>
  </Definition>
  <Name>
    <CharacterString>angle</CharacterString>
  </Name>
</PropertyValue>
```

```
<Unit uidRef="u--000000002"/>
<ValueComponent>45</ValueComponent>
</PropertyValue>

<PropertyDefinition uid="pd--000000320">
  <Id id="quality property"/>
  <PropertyType>
    <ClassString>user defined attribute</ClassString>
  </PropertyType>
</PropertyDefinition>
```

### 12.5.2 Values without Unit (String)

Values without applicable unit convey all kinds of information, in particular in the context of PDM Properties.

To define such an attribute (string), the “StringValue” template defined in chapter 4.6.10. shall be used.

#### **Preprocessor Recommendations:**

- A *descriptive attribute* stores an arbitrary text string in the `ValueComponent` attribute. As usual in STEP, any special characters in the name or description need to be encoded in Unicode.

#### **Postprocessor Recommendations:**

- The values shall be mapped to the internal attribute types of the importing system according to its default typecasting rules. In case an unexpected value is encountered – e.g. an arbitrary string when an integer value is expected – an error message shall be given.

Note: For implementations based on AP242 MIM / STEP Part 21, the EXPRESS data model defines the following entity type for the transfer of string values:

- `descriptive_representation_item`

### 12.5.3 Values without unit (Integer, Real, Boolean, Logical)

Values without applicable unit convey all kinds of information, in particular in the context of PDM Properties.

To define such an attribute (Integer, Real, Boolean, Logical), the “NumericalValue” template defined in chapter 4.6.10. shall be used.

Three main types can be distinguished, which shall be handled as recommended below.

#### **Preprocessor Recommendations:**

- A dedicated `Name` shall be set with the value ‘number without unit’.
- An *integer attribute* stores a whole number (and nothing else) as a double in the `ValueComponent` attribute. Examples for this include counts and sequences.
- A *real attribute* stores a decimal number (and nothing else) as a double in the `ValueComponent` attribute. Examples for this include ratios and percentages.
- A *boolean or logical attribute* stores a pre-defined value as a double in the `ValueComponent` attribute. The value shall be either ‘TRUE’, ‘FALSE’, or ‘UNKNOWN’.

#### **Postprocessor Recommendations:**

- The values shall be mapped to the internal attribute types of the importing system according to its default typecasting rules. In case an unexpected value is encountered –



e.g. an arbitrary string when an integer value is expected – an error message shall be given.

Note: For implementations based on AP242 MIM / STEP Part 21, the EXPRESS data model defines three dedicated entity types for the transfer of values without unit:

- integer\_representation\_item
- real\_representation\_item
- boolean\_representation\_item

Having such explicit counterparts in the AP242 BO Model would improve the stability of PDM Property exchange. BugZilla [#6290](#) has been created to add these elements in a future revision of the standard. Target for STEP AP242 ed3 to improve the model.

#### Example of Integer representation with the “NumericalValue” template:

Use “number without unit” as the NumericalValue Name and “integer representation” as Unit Name.

```
<PropertyValue uid="id1" xsi:type="ap:NumericalValue">
  <Definition>
    <PropertyDefinition uidRef="pd--000000320"/>
  </Definition>
  <Name>
    <CharacterString>number without unit</CharacterString>
  </Name>
  <Unit uidRef="u--000000002"/>
  <ValueComponent>45</ValueComponent>
</PropertyValue>

<Unit uid="u--000000002">
  <Name>
    <ClassString>integer representation</ClassString>
  </Name>
</Unit>
```

#### Example of Real representation with the “NumericalValue” template:

Use “number without unit” as the NumericalValue Name and “real representation” as Unit Name.

```
<PropertyValue uid="id1" xsi:type="ap:NumericalValue">
  <Definition>
    <PropertyDefinition uidRef="pd--000000320"/>
  </Definition>
  <Name>
    <CharacterString>number without unit</CharacterString>
  </Name>
  <Unit uidRef="u--000000002"/>
  <ValueComponent>0.56</ValueComponent>
</PropertyValue>

<Unit uid="u--000000002">
  <Name>
    <ClassString>real representation</ClassString>
  </Name>
</Unit>
```

Example of Boolean / Logical representation with the “NumericalValue” template:

For the Boolean representation, the ValueComponent element have to be set following the list hereafter because the XSD used an XSD:double where string value are not authorized.

Based on the Logical, Boolean definition from the 10303 Part11: FALSE < UNKNOWN < TRUE

Use “number without unit” as the NumericalValue Name and “boolean representation” or “logical representation” as Unit Name.

- FALSE : ValueComponent = 0 (for Logical and Boolean)

```
<PropertyValue uid="id1" xsi:type="ap:NumericalValue">
  <Definition>
    <PropertyDefinition uidRef="pd--000000320"/>
  </Definition>
  <Name>
    <CharacterString>number without unit</CharacterString>
  </Name>
  <Unit uidRef="u--000000002"/>
  <ValueComponent>0</ValueComponent>
</PropertyValue>

<Unit uid="u--000000002">
  <Name>
    <ClassString>logical representation</ClassString>
  </Name>
</Unit>
```

- UNKNOWN : ValueComponent = 0.5 (only for Logical and NOT for Boolean)

```
<PropertyValue uid="id1" xsi:type="ap:NumericalValue">
  <Definition>
    <PropertyDefinition uidRef="pd--000000320"/>
  </Definition>
  <Name>
    <CharacterString>number without unit</CharacterString>
  </Name>
  <Unit uidRef="u--000000002"/>
  <ValueComponent>0.5</ValueComponent>
</PropertyValue>

<Unit uid="u--000000002">
  <Name>
    <ClassString>logical representation</ClassString>
  </Name>
</Unit>
```

- TRUE : ValueComponent = 1 (for Logical and Boolean)

```
<PropertyValue uid="id1" xsi:type="ap:NumericalValue">
  <Definition>
    <PropertyDefinition uidRef="pd--000000320"/>
  </Definition>
  <Name>
    <CharacterString>number without unit</CharacterString>
  </Name>
  <Unit uidRef="u--000000002"/>
  <ValueComponent>1</ValueComponent>
</PropertyValue>

<Unit uid="u--000000002">
  <Name>
```

```
<ClassString>logical representation</ClassString>
</Name>
</Unit>
```

## 12.6 Transfer of Meta-Data for the User Defined Attributes

In the same way as in section 7.4 of the CAX-IF Recommended Practices for User Defined Attributes V1.2, the aim of this section is to give as an option the possibility to add additional information about an attribute, an attribute value, or group thereof.

Note that this is not supported for user defined attributes defined on shape elements (see section 13.4.3 above), since the PropertyValueAssignment cannot point to a ShapeDependentProperty.

Using the PropertyValueAssignment template it is possible to add even more information about an attribute, an attribute value, or group thereof. This may include CAD-system specific data, such as whether the attribute is relevant for a data management system or not. The identifier of the additional information is carried in the PropertyValue.Name attribute, and the value is transferred in the PropertyValue.ValueComponent.

The “meta data” will be defined as a “property of a property”, and they can be distinguished easily from the actual user defined attributes by two means:

- its PropertyValueAssignment will point to a PropertyValueAssignment, and not one of the model elements identified in section 6.2.
- its PropertyValueAssignment will have no associated PropertyDefinition

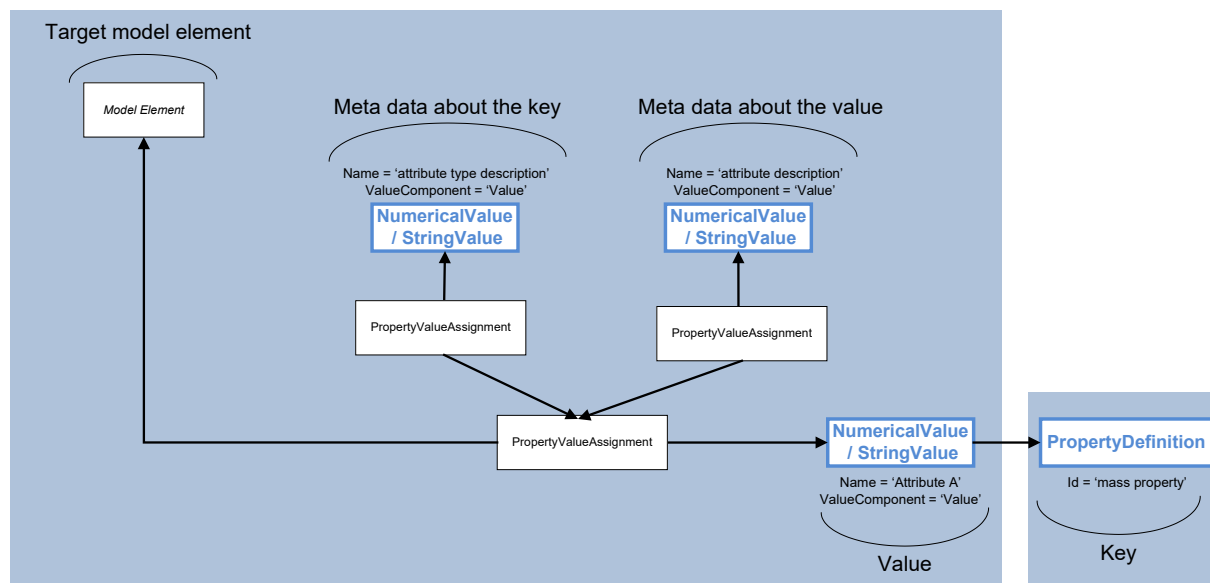


Figure 65: Specification of meta data for an attribute and its value

## 12.6.1 Designation of the Attribute Type

In order to transfer the name of the type for the user defined attribute as given in the originating system, add an additional property with the `PropertyValueAssignment` template with the following attribute characteristics:

- `PropertyValue.name`: 'attribute type designation'
- `PropertyValue.ValueComponent`: The designation of the attribute type as given in the native system

This shall be linked to the attribute value definition (`PropertyValueAssignment`) as shown in the figure above.

### 12.6.1.1 Attribute Value / Group Description

In order to transfer a description for the attribute (**Note** that this is a description *about* the attribute, in contrast to a descriptive attribute as defined in section 12.5), add an additional property with the `PropertyValueAssignment` template with the following attribute characteristics:

- `PropertyValue.name`: 'attribute description'
- `PropertyValue.ValueComponent`: Textual information about the attribute

This shall be linked to the `PropertyValueAssignment` of the UDA or a group of values as shown in the figure above.

## 13 Validation Properties

This chapter describes how to confirm the correctness of exchanged geometry information and assembly information compared to its source. The following exchange process is suggested to enable validation of exchanged information. It is optional to apply validation properties in exchange files.

Product data are created in a source system and shall be sent to a target system using the exchange format described in this document.

The source system derives – from its own representation of the product data - validation properties that reflect the main semantics of the product data. For the purpose of this document the following two types of validation properties are distinguished:

- *Assembly Validation Properties (AVP)*: They provide a verification capability for product structure data where geometry is not present. Two properties are recommended: one to ensure that the number of instances found at each node is correct and another one to ensure that the position and orientation information for each instance is correct. See section 7 of the Recommended Practices for Geometric and Assembly Validation Properties (see reference in Annex C) and section 13.1, below for details.
- *Geometric Validation Properties (GVP)*: They describe characteristics of a solid or surface model or of a collection of them and are assigned to parts and assemblies. See section 4 of the Recommended Practices for Geometric and Assembly Validation Properties (see reference in Annex C) and section 0, below for details.

These validation properties enable the verification of geometry and assembly information of received data sets. Values for these properties are added to the exchanged data set of the product structure, that is, to the representation that is sent to the target system. The target system reads the received data set including the source validation properties. It converts the data set, but not the validation properties, to the target representation. The target system derives the validation properties from this local representation after conversion using the same algorithms that are described here and that were applied at the source system.

The validation property values of the source and the target representations are then compared, manually or by a dedicated application. If the values are identical within an agreed tolerance, the semantics of the source product data were exchanged correctly to the target representation. With this, the validation of the exchange is completed successfully.

**Preprocessor Recommendations:** It is recommended that all the validation properties of one AssemblyDefinition use the same PropertyValueAssignment.

### 13.1 Assembly Validation Properties (Notional Solid, Number of Children)

Section 7 of the Recommended Practices for Geometric and Assembly Validation Properties (see reference in Annex C) specifies the semantics of two Assembly Validation Properties:

- *Number of Children*: For each node the number of instances or branches is recorded.
- *Notional Solids Centroid Position*: The positional information for each instance in the product structure is recorded, i.e. position and orientation of the coordinate systems for each child node relative to its parent. Note that this condition is not mathematically guaranteed by this methodology, but the chance of an incorrect position and orientation combining to give the correct result is extremely small.

These two validation properties allow verifying that the number of instances found at each node is correct and that the position and orientation information for each instance is correct.

The following sub-sections describe the representations of values of these properties in an AP242 BO XML exchange structure.

### 13.1.1 Number of Children

Each Part node which is a parent part of at least one other Part node will have a property attached to enumerate the actual number of child instances of that parent node.

This property shall be assigned to an AssemblyDefinition as property, using the “PropertyAssignment” template; see chapter 6.2. The property value counts the number of NextAssemblyOccurrenceUsage instances that reference this AssemblyDefinition by their relating-attribute; see Figure 66, below.

**Note:** Number of Children properties shall be computed without taking configuration management information into account, since not all target applications support configuration management information. Configuration management information may include concepts like effectivity and versioning.

The property value shall be instantiated according to the following description, which is depicted in the instance diagram in Figure 66 below.

All instances of type AssemblyDefinition that are used as relating AssemblyDefinition instances by one or more NextAssemblyOccurrenceUsage instances will have a single PropertyValueAssignment of the PropertyAssignment template assigned to it to represent the number of children count. The classification of this PropertyValueAssignment instance shall follow the recommendation for attribute classifiedAs in section 6.2.

Only one NumericalValue shall be referenced by this PropertyValueAssignment, that is, there shall be only one element in the set of assignedPropertyValues. The name of this NumericalValue shall be ‘number of children’. The PropertyDefinition.PropertyType shall be ‘assembly validation property’ and the PropertyDefinition.Id shall be ‘quality property’. The Unit of the NumericalValue shall be ‘each’. The format of the NumericalValue should be Integer (i.e. not a real with comma or scientific notation).

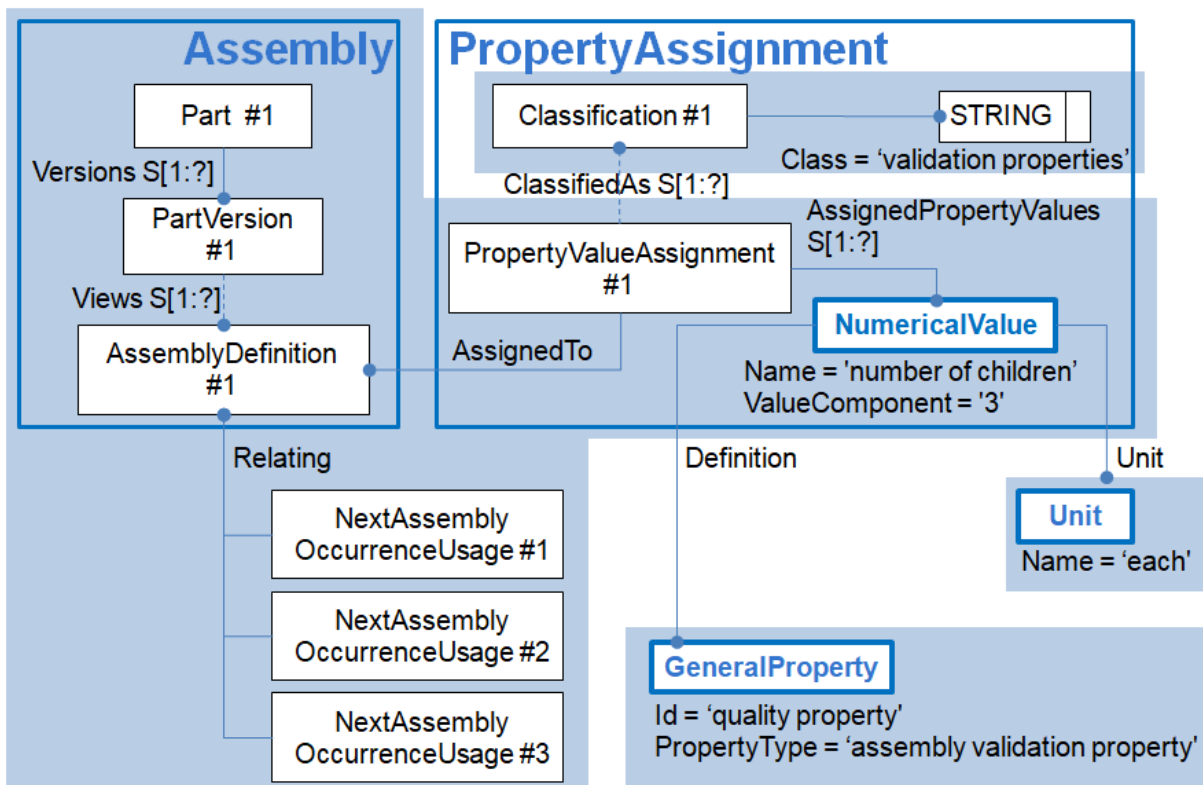


Figure 66: Instantiation of AVP ‘number of children’ for 3 children

### 13.1.2 Notional Solids Centroid Position

This property is similar to the geometric validation property “centroid” (see section 13.2.1.3): here, as well, a location property is defined for each sub-assembly. However, in this case the property is not calculated based on the real geometry of the product.

The details of this property are specified in section 7.2 of the Recommended Practices for Geometric and Assembly Validation Properties and repeated here.

For the top node and each intermediate node of a product structure, a notional solid is assumed within the child node of each child instance of that node. Using the positional and orientation relationship for each child instance, a centroid position can be calculated for the combined set of notional solids within the set of child instances.

The notional solid will be a cube of size 10 x 10 x 10. The notional solid will be positioned with its centroid at (10.0, 10.0, 10.0) of the coordinate system of the child node. Note that the actual size and shape of the notional solid will not, in fact, affect the overall result. The key data is the centroid position and the assumption that the volume of the notional solid in each child node is the same. Mathematically, the calculated point is the mean of the set of points at (10.0, 10.0, 10.0) within the child nodes.

Note that in contrast to an actual solid centroid, the notional solid itself is not in the STEP file – it is just a convention. Thus, it has to be ensured that the correct geometrical context is used for the notional solids centroid position, in order to guarantee that the units are applied correctly. In addition, the notional solid does not have any material properties such as density and weight, thus centroid, center of mass and center of geometry are synonymous.

The child node may be a leaf node of the overall assembly or another intermediate node within the sub-assembly. Each case is treated in the same way. Even though the child node might be an intermediate node with no actual geometry defined, a notional solid will be assumed for the purpose of this calculation.

The notional centroid for each sub-assembly is influenced only by the notional solids in each of its direct child nodes.

The property value shall be instantiated according to the following description, which is depicted in the instance diagram in Figure 67, below.

All instances of type `AssemblyDefinition` that are referenced as relating `AssemblyDefinition` instances by one or more `NextAssemblyOccurrenceUsage` instances will have a single `CentreOfMass` assigned to it. The `CentreOfMass` represents the notional solid centroid position. The child nodes that this centroid position is valid for are those `Occurrences` that are referenced by the `NextAssemblyOccurrenceUsage.related` attributes.

The role of the `CentreOfMass` shall be ‘assembly validation property’. Its id shall be ‘notional solids centroid’. An `AssemblyDefinition` instance shall be assigned at maximum one instance of `CentreOfMass` with this id.

The `CentreOfMasscentrePoint` is a `CartesianPoint` with exactly three coordinate values of type `REAL`. The `CartesianPoint` defines the calculated centroid for the notional solids assumed for each child node. See section 6.1 for the definition of `CartesianPoint`.

To denote the coordinate space of the `CartesianPoint` a `GeometricCoordinateSpace` is instantiated with `dimensionCount` equal three, as this is a centroid in three-dimensional space.

The unit that the coordinate values are measured in shall be provided as string-value in the attribute `CentreOfMass.definedIn.unit`.

In case of relative positioning, it is up to the pre-processor to provide a distinct instance of `GeometricCoordinateSpace` for each `CentreOfMass`.



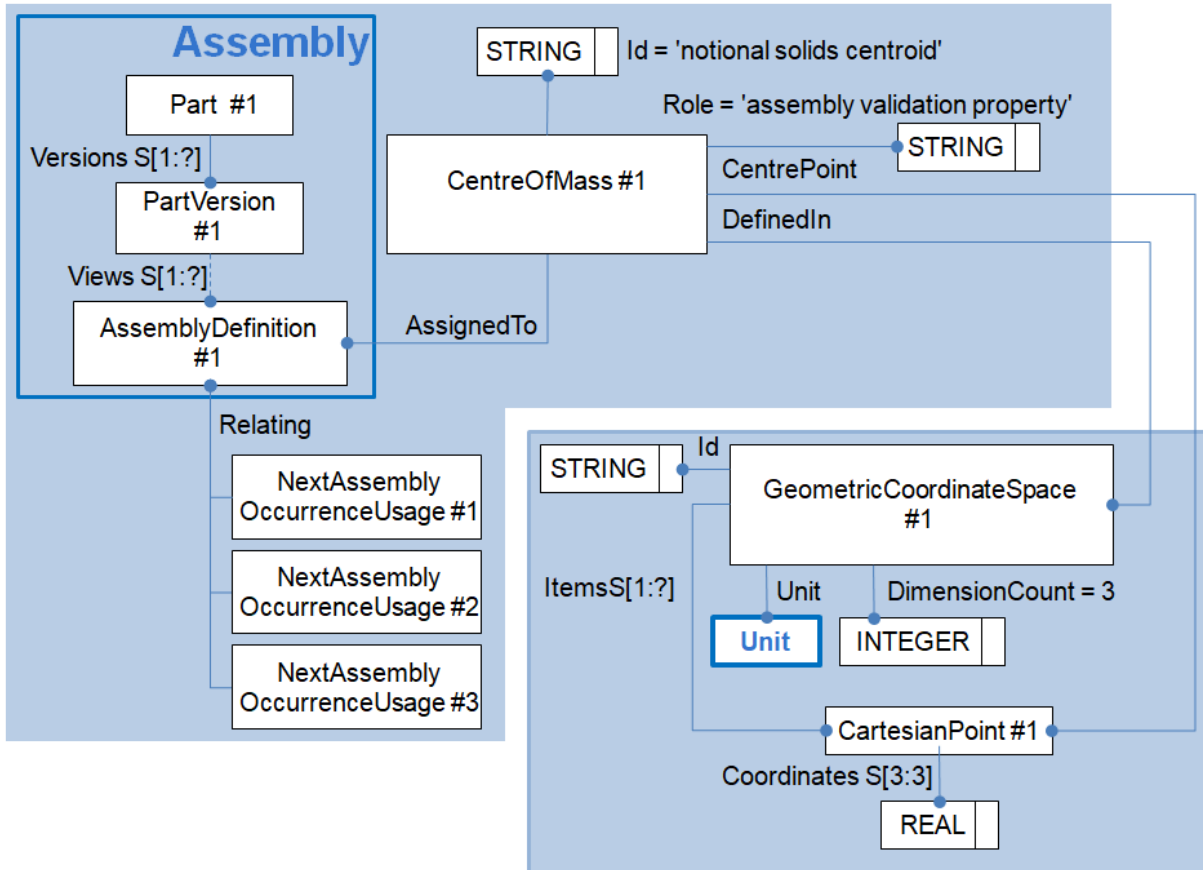


Figure 67: Instantiation of AVP 'notional solids centroid'

ENTITY CentreOfMass	Attribute Type
ClassifiedAs	OPTIONAL SET[1:?] of Classification
DefinedIn	GeometricCoordinateSpace
Description	OPTIONAL DescriptorSelect
Id	OPTIONAL Id
Role	OPTIONAL ClassSelect
ValueDetermination	OPTIONAL ClassSelect
CentrePoint	CartesianPoint

Table 61: "CentreOfMass" Attributes

**Attribute recommendations:**

- DefinedIn:** the GeometricCoordinateSpace in which the property is applicable. To denote the coordinate space of the CartesianPoint, a GeometricCoordinateSpace is instantiated with dimensionCount equal three, as this is a centroid in three dimensional space. The unit that the coordinate values are measured in shall be provided as string-value in the attribute CentreOfMass.definedIn.unit . In case of relative positioning, it is up to the pre-processor to provide a distinct instance of GeometricCoordinateSpace for each CentreOfMass.
- Id:** the identifier for the CentreOfMass. The id shall be provided as type IdentifierString; the string value shall be 'notional solids centroid'. An AssemblyDefinition object shall be assigned at maximum one object of CentreOfMass with this id.



- **Role:** the meaning of the assignment. The role of the CentreOfMass shall be provided as type ClassString; the string value shall be 'assembly validation property'.
- **CentrePoint:** a point in three-dimensional space that defines the location of a CentreOfMass in a GeometricCoordinateSpace. The CentreOfMass.centrePoint is a CartesianPoint with exactly three coordinate values of type REAL. The CartesianPoint defines the calculated centroid for the notional solids assumed for each child node.
- Other attributes than these are not covered by these Recommended Practices; their use is discouraged as it would depend on mutual agreements between data exchange partners.

**Preprocessor Recommendations:**

- If the Part/Assembly for the CentreOfMass has a GeometricModel associated to it, both (CentreOfMass and GeometricModel) shall be defined in the same GeometricCoordinateSpace.

**Postprocessor Recommendations:** None specified.

**Related Entities:**

- See Table 27 in section 6.1 for the definition of CartesianPoint.
- See Table 25 in section 6.1 for the definition of GeometricCoordinateSpace.

**13.2 Geometric Validation Properties (Repeated from referenced Parts)**

Geometric Validation Properties (GVP) describe characteristics of a solid or surface model or of a collection of them. The original specification of GVPs is in section 4 of the “Recommended Practices for Geometric and Assembly Validation Properties” (see reference in Annex C) for details. The most important information is repeated here.

The validation properties defined in this document represent different types of measures: for volume, for area, and for length. Each of these requires a correct definition of the applied unit of measure in the XML file.

Geometric Validation Properties in an AP242 BO Model XMLfile can only be attached to parts or assemblies, not to geometry, as the representation of detailed geometry is out of scope of the AP242 BO Model.

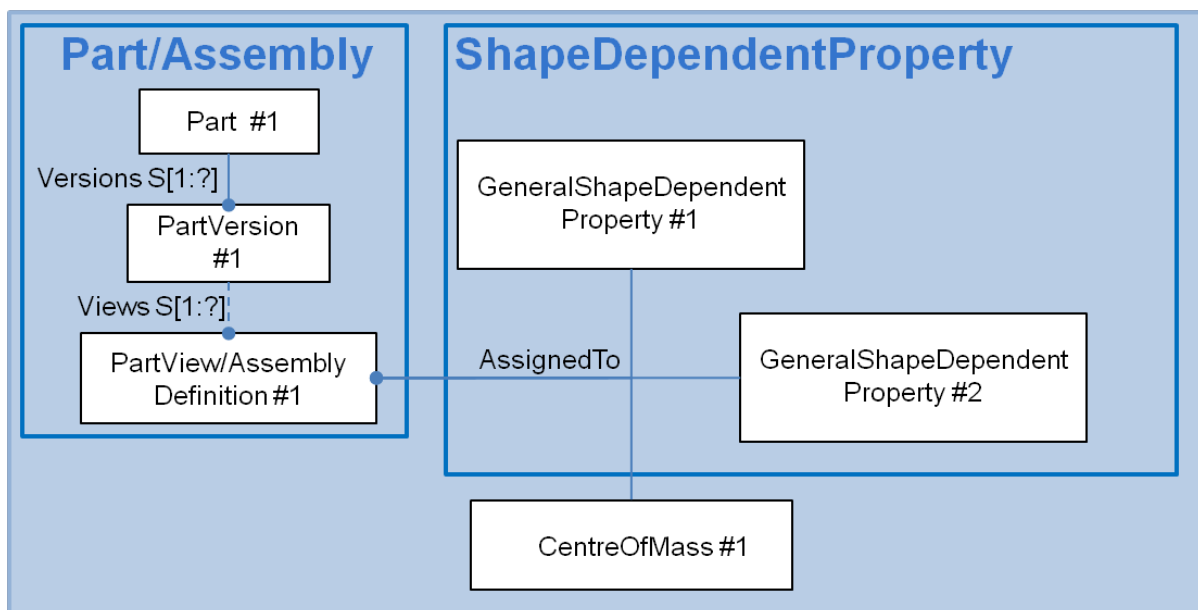


Figure 68: Geometric Validation Properties at the Part and Assembly level

Geometric Validation Properties will be defined dependent on the class of geometry:

- Solids: volume, surface area, and centroid;
- Surfaces: surface area, and centroid;
- Curves: curve length, and centroid.

This means that if a model contains a solid, independent surfaces, and independent curves, there will be three different centroids given in the validation properties: one for each class.

**Note:** Geometric Validation Properties shall be computed solely off the part geometry. They should not take any Supplemental Geometry into account, since not all target applications support Supplemental Geometry. In addition, Supplemental Geometry may contain unbounded elements.

### 13.2.1 Validation Properties for Solid Geometry

#### 13.2.1.1 Volume

Volume specifies the amount of space occupied by the solid model as measured in cubic units. During an exchange this GVP can be used to validate the success of creating an equivalent solid via the translation.

Figure 69 illustrates the instances required to specify in the XML file the volume property value of the original part, as calculated in the native system.

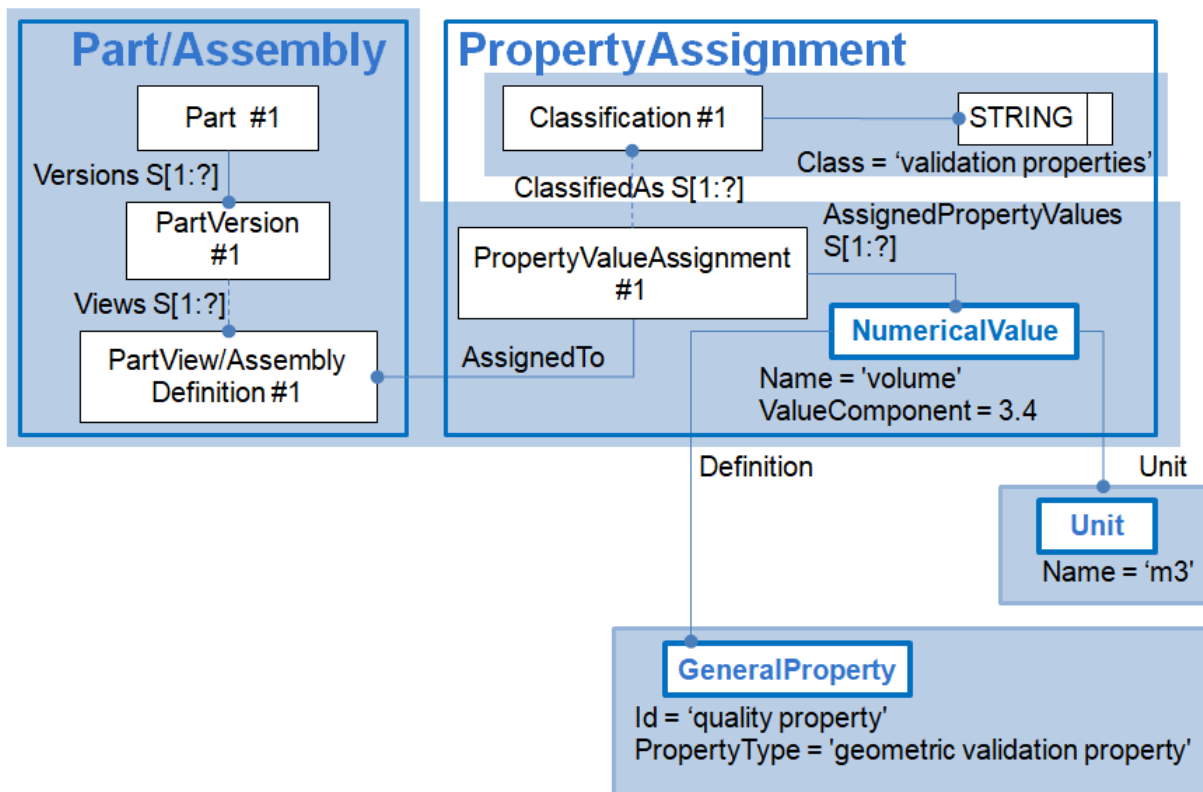


Figure 69: GVP 'volume' of 3.4 cubicmetre assigned to a Part or Assembly

### 13.2.1.2 SurfaceArea

Surface area specifies the area measurement of the surface of an entire solid. By default, this will include any voids in the model. Figure 70 below illustrates the relevant entities and their mandatory attributes used in the assignment of the surface area validation property.

**Note:** Since CATIA calculates the 'wetted area' (i.e. voids will not be taken into account) instead of the total surface area, the validation mechanism will report a 'false error' when exchanging a model with voids in it between a CATIA-based and a non-CATIA-based system. Therefore, when exporting validation properties from a CATIA-based system, the name of the NumericalValue (see Figure 70) shall be 'wetted surface area' instead of 'surface area'.

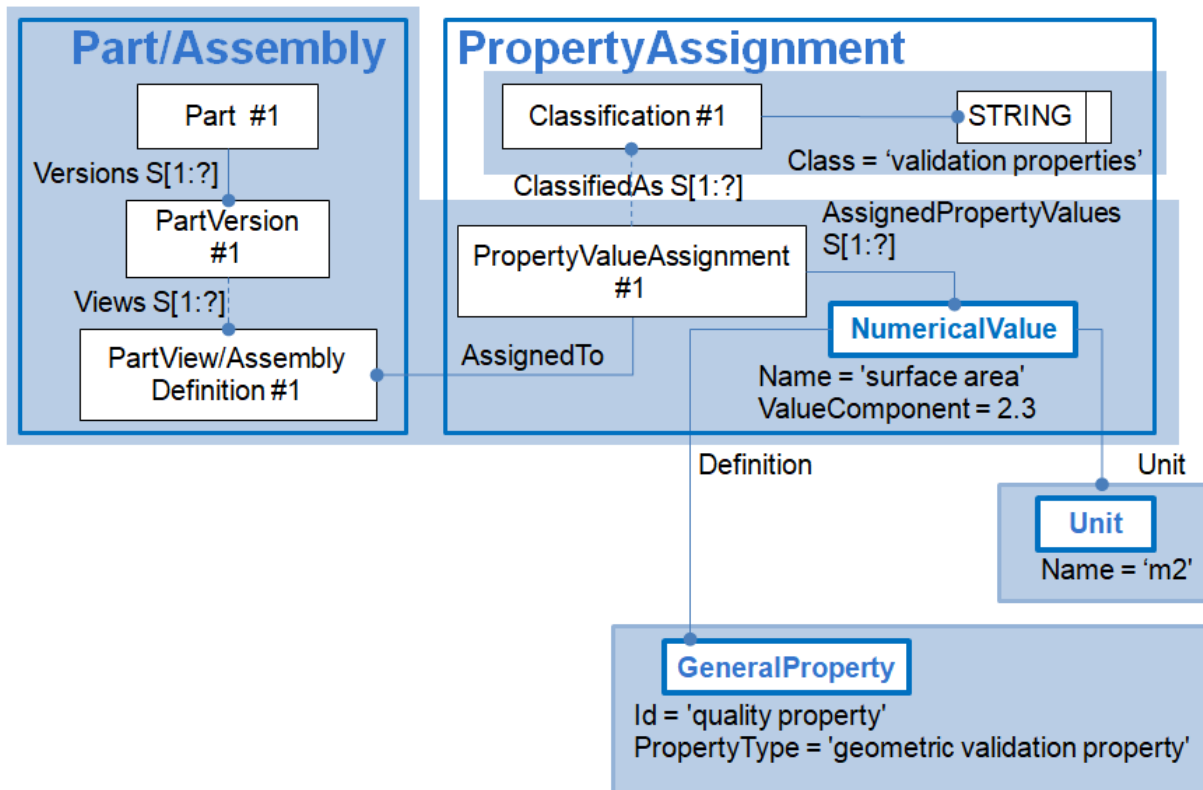


Figure 70: GVP 'surface area' of 2.3 squaremetre assigned to a Part or Assembly

### 13.2.1.3 Solid Centroid

A centroid is the center of volume of a geometric solid model; in the AP242 BO Model this corresponds to the entity CentreOfMass. The position of the centroid is an invariant datum relative to the model origin, thus during an exchange, this can be used to validate the positional integrity of any geometric translations.

If the Part/Assembly for the CentreOfMass has a GeometricModel associated to it, both (CentreOfMass and GeometricModel) shall be defined in the same GeometricCoordinateSpace.

Note that material properties, such as density and weight, are currently not in scope of this document. Hence, the terms "center of mass", "center of geometry" and "centroid" are used synonymously.

Figure 71 illustrates the relevant entities and their mandatory attributes used in the assignment of a solid centroid for validation. Instantiation follows the same principles as for the AVP 'notional solids centroid'; see 13.1.2.

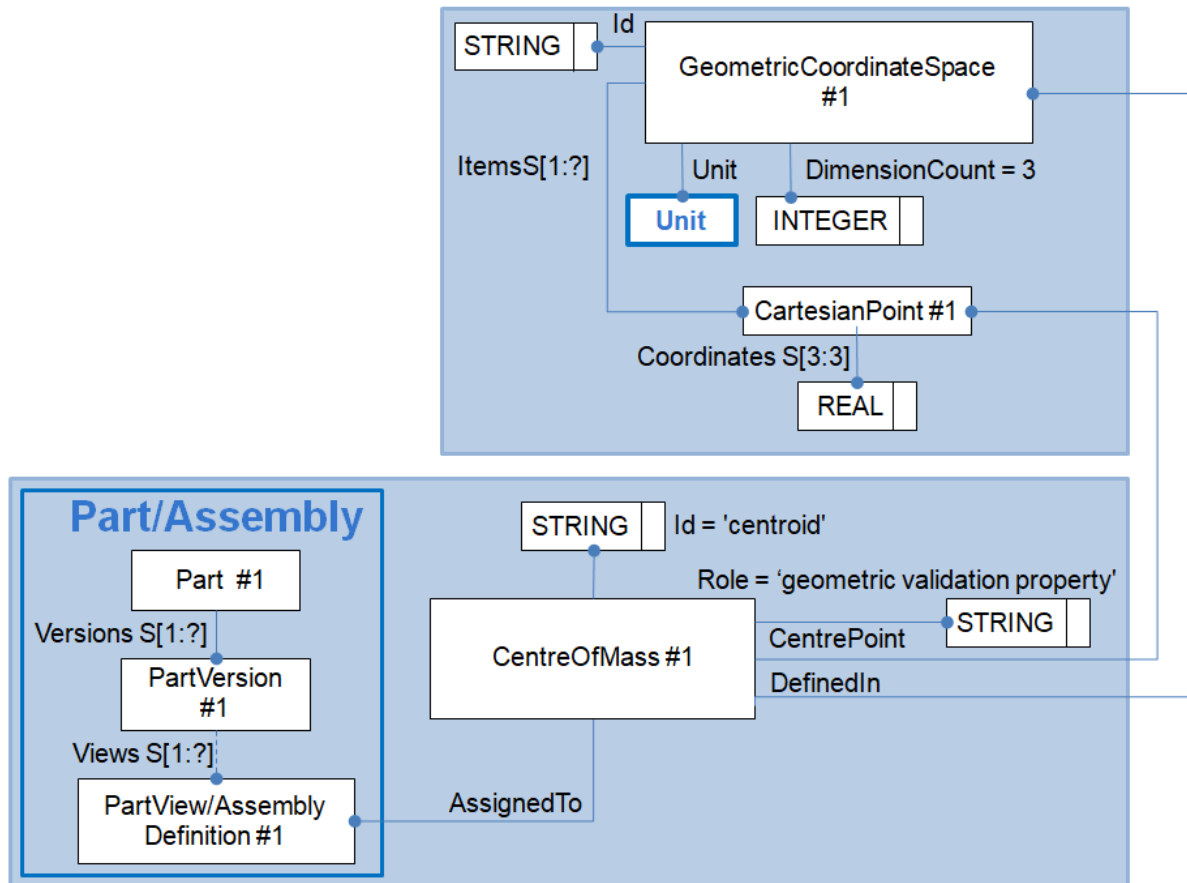


Figure 71: GVP 'centroid' or CentreOfMass assigned to a Part or Assembly

## 13.2.2 Validation Properties for Surface Geometry

### 13.2.2.1 Independent Surface Area

The designation “independent” for a surface means that it is not a face of a solid. Such surfaces can occur as constituents of a surface model (open or closed shell), or as additional elements in a solid model. The total area of these surfaces in a model can be validated to ensure completeness of the exchanged data.

The instantiation follows the exact same pattern as defined in section 13.2.1.2, Figure 70, using the following magic strings instead:

- NumericalValue.name = “independent surface area”

### 13.2.2.2 Independent Surface Centroid

In addition to the total area of independent surfaces (see section above), their positioning is of interest as well. This can be validated using the combined centroid of all independent surfaces in the model.

The instantiation follows the exact same pattern as defined in section 13.2.1.3, Figure 71, using the following magic strings instead:

- CentreOfMass.id = “independent surface centroid”.

## 13.2.3 Validation Properties for Curve / Wireframe Geometry

### 13.2.3.1 Independent Curve Length

The designation “independent” for a curve means that it is not the edge curve of a surface or solid. Such curves can occur as constituents of a wireframe model, or as additional elements in a surface or solid model. The total length of these curves in a model can be validated to make sure no information was lost during transfer. Use cases for this are electric harnesses and piping installations, where independent curves are used as center curves of wires or pipes.

The instantiation follows the exact same pattern as defined in section 13.2.1.2, Figure 70, using the following magic strings instead:

- `NumericalValue.name = “independent curve length”`

The values of `NumericalValue.valueComponent` and `Unit.name` in Figure 70 will need to be changed according to the use case at hand, that is, to the length of a curve and a length unit instead of the area of a surface and an area unit.

### 13.2.3.2 Independent Curve Centroid

In addition to the total length of independent curves in a model (see previous section), their position is of interest as well. The independent curve centroid shall store the combined centroid of all independent curves at the part level. Use cases for this are electric harnesses and piping installations, where an independent curve is used as the center curve of the wire or pipe.

The instantiation follows the exact same pattern as defined in section 13.2.1.3, Figure 71, using the following magic strings instead:

- `CentreOfMass.id = “independent curve centroid”`.

## 13.2.4 Bounding Box

The bounding box is a means of providing information about the model extent and location. It can be used as a further way of validating the position of the model by providing the space it fits into, in addition to the centroid. As there are many different ways to define a bounding box, the CAx-IF has agreed on a common definition, which uses two three-dimensional points (minimum X, minimum Y, minimum Z) and (maximum X, maximum Y, maximum Z).

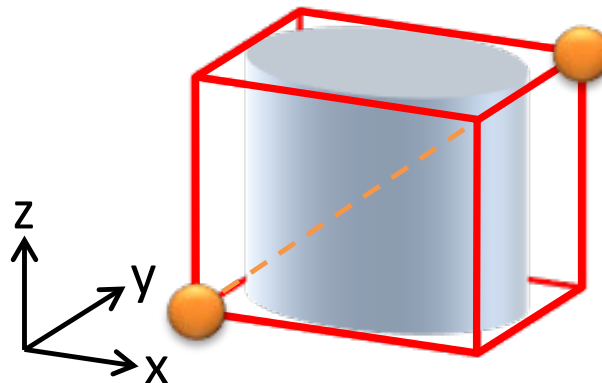


Figure 72: Bounding Box defined by two opposing corner points

The detailed definition is given in section 4.9 of the Recommended Practices for Geometric and Assembly Validation Properties (see Annex C).

The instantiation follows the same pattern as defined in section 13.2.1.3, Figure 71; however there will be two instances of `CentreOfMass` to the same instance of `Part` or `Assembly`, both using the same magic string:

- `CentreOfMass.id = “bounding box corner point”`.

## 14 Exchange of Customized PDM Information

This section describes how, additionally to the standard objects, structures and properties defined in the previous sections, the customized objects, structures and properties defined in the PDM system may be exchanged.

### 14.1 Supported Customization Features of the PDM Systems

Current PDM systems offer a wide range of customization features. General concepts such as the definition of specialized objects, attributes and relationships, can easily be mapped to the AP242 BO Model and exchanged between the different systems. The following sections provide an introduction to managing these concepts.

There are, however, concepts where it is currently not clear if and how they can be mapped not only to the AP242 BO Model, but also between different PDM systems. Enumerations, sequences and formulas are a few examples.

These advanced concepts will be worked on based on user requirements and added to future releases of these Recommended Practices when an agreed solution has been found.

### 14.2 Customized Objects & Structures

All the AP242 BO Model entities have an attribute 'ClassifiedAs', which may reference one or many instances of Classification (for more details, refer to chapter 4.6.5).

#### **Preprocessor Recommendations:**

In case an object or structure is customized, its name shall be mapped to a Class (not a ClassString) defined in an ExternalClassSystem called 'customized part type' (for Parts), 'customized document type' (for Documents), 'customized work request type' (for WorkRequests), 'customized work order type' (for WorkOrders) or 'customized activity type' (for Activities). This class shall be referenced through ClassifiedAs via an instance of Classification with Role='customized type'.

The idContextRef of the Class and ExternalClassSystem references the organization from which the customization is coming from.

It is not recommended to use the attributes Part.PartTypes and Document.DocumentTypes for this purpose. PartTypes/DocumentTypes shall contain recommended or individual values that indicate what kind of part/document it is, but not the name of customized PDM type.

If the PDM customization defines hierarchies of customized types, like for example:

```
PDMIFPart_MB
    PDMIFElectricalPart_MB
        PDMIFCapacitor_MB
        ...
    PDMIFMechanicalPart_MB
        PDMIFMechStandardPart_MB
        ...
```

It is recommended that only the leaf class gets referenced by ClassifiedAs.

The mapping of this hierarchy via ClassificationRelationship is currently out of scope of this document.

#### **Postprocessor Recommendations:**

The properties of each customized object/structure shall be mapped to properties of the corresponding (standard or customized) object/structure of the target PDM system.

## The Instance Model: STEP exchange file format (ISO10303 AP242 BO Model XML syntax)

```
<ExternalClassSystem uid="ecs--cpp">
  <Id>
    <Identifier uid="cpp--id" id="customized PDM object" idRoleRef="C__5" id-
ContextRef="O__3"
    </Id>
  </ExternalClassSystem>

<Class uid="cpp--pdmifmb">
  <DefinedIn uidRef="ecs--cpp"/>
  <Id id="PDMIFPart_MB"/>
</Class>

<Classification uid="cl--pdmifmb">
  <Class uidRef="cpp--pdmifmb"/>
  <Role>customized type</Role>

</Classification>

<Part uid="p--0000000017086CB0">
  <ClassifiedAs>
    <Classification uidRef="cl--pdmifmb"/>
  </ClassifiedAs>
  ...
</Part>
```

### 14.3 Customized Properties

#### ***Preprocessor Recommendations:***

The customized properties of a customized object or structure shall be mapped as described in the chapter 12 using the value 'customized PDM property' for PropertyDefinition.PropertyType.

They are defined in the customized PDM object or structure, either as classification properties (like in SAP) or as subtype of the standard PDM object/structure (like in Teamcenter, Windchill, ...) or as additional properties of the standard PDM object/structure (like in Aras).

The default value and, for enumerations, the allowed values of customized properties may be mapped as following:



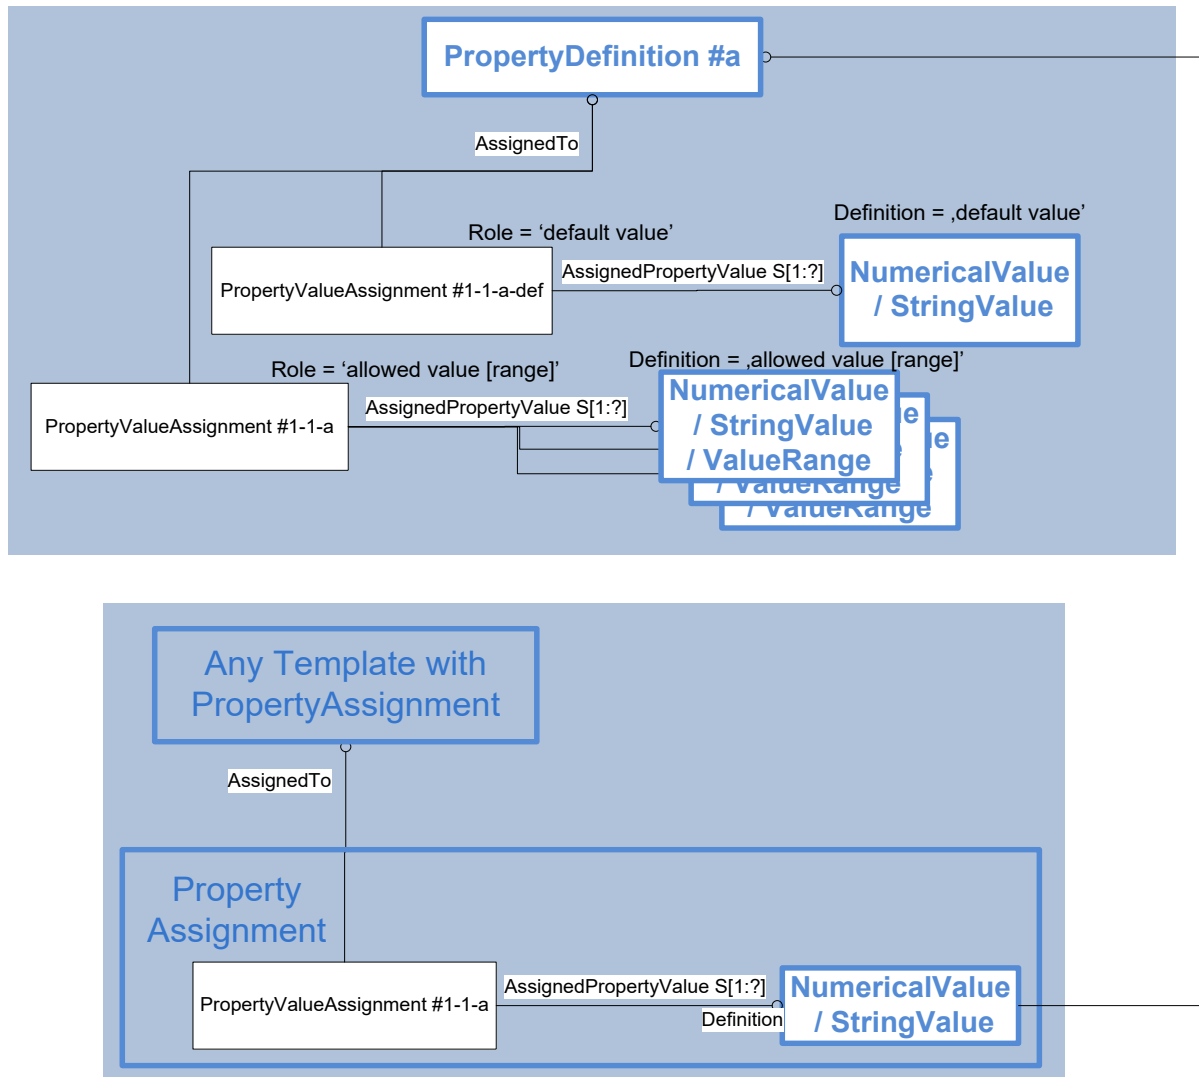


Figure 73: Default/Allowed values of customized properties

This requires an extension in the SELECT type PropertyAssignmentSelect, initiated by the Bugzilla issue [#6844](#).

Additional definitional information (like real length/precision, integer length, optional/mandatory, unique, indexed, string length, string pattern) have been issued in the Bugzilla issue [#6856](#) to be added to PropertyDefinition. PropertyDefinition.AllowedUnits is already supported.

Customized properties of type Date can be mapped beside the standard date properties (4.6.11) with Role=<name of the customized date property>. The use of multi-value properties (ValueSet/ValueList), ValueLimit, ValueRange and ValueWithtolerances is currently not in scope.

Dito for Persons (4.6.13) and PersonInOrganizations (4.6.14). The use of DateAndPersonAssignment is not recommended.

Dito for Approvals (4.6.12) with ApprovalAssignment.Id = <name of the customized date property>. The introduction of an ApprovalAssignment.Role has been initiated by the Bugzilla issue [#6291](#).

In order to exchange a lifecycle workflow, i.e. the supported approval status transitions (often defined as a graph in the PDM systems), the use of ApprovalRelationship with Relation-Type='workflow successor' is recommended. An approval may have zero, one or multiple predecessors/successors.



If more than one lifecycle workflow is exchanged (for example one for Parts and one for Documents, or even one for CAD Documents and one for non-CAD Documents), the Approvals of each workflow shall be assigned to a distinct ExternalClassSystem.

Here is an example:

```
<ExternalClassSystem uid="ecs--lc-part">
  <Id>
    <Identifier uid="fd--lc-part-id1" id="part lifecycle" idRoleRef=",,rl--ii" idContextRef="o--000000178"/>
  </Id>
</ExternalClassSystem>
<Class uid="cl--lc-part-1">
  <DefinedIn uidRef="ecs--lc-part"/>
  <Id id="part lifecycle value 1"/>
</Class>
<Class uid="cl--lc-part-2">
  <DefinedIn uidRef="ecs--lc-part"/>
  <Id id="part lifecycle value 2"/>
</Class>

<Approval uid="app--1">
  <Description>
    <CharacterString>disposition</CharacterString>
  </Description>
  <Status>
    <Class uidRef="cl--lc-part-1"/>
  </Status>
</Approval>

<Approval uid="app--2">
  <Description>
    <CharacterString>disposition</CharacterString>
  </Description>
  <Status>
    <Class uidRef="cl--lc-part-2"/>
  </Status>
</Approval>
```

In order to facilitate the mapping definition of all customized properties at a time on the receiver system, rather than to complete the mapping each time a new property is instantiated (if not considered in the mapping it might get lost...), it is recommended (at least in a kind of “training mode”) to exchange all the properties, even the unset ones, and to set the value of the unset ones to:

- ‘/UNSET’.for STRING and BOOLEAN properties
- 2147483647 (MAX\_LONG) for INTEGER or REAL properties
- 1970-01-01T00:00:00 for Date properties

In case of Part and Document, to simplify the postprocessors:

- the customized DateTimeAssignments, ApprovalAssignments and OrganizationOrPersonInOrganizationAssignments shall be associated to the PartVersion or DocumentVersion (and not to PartView or DocumentDefinition), just as described in the sections 5.1.2 and 8.1.2.
- the customized PropertyAssignments shall be associated to the PartView or DocumentDefinition (and not to PartVersion or DocumentVersion), just as described in the sections 5.1.3 and 8.1.3.

In case the sender PDM system has distinct part/document master/version objects, customized PropertyAssignments, DateTimeAssignments, ApprovalAssignments and OrganizationOrPersonInOrganizationAssignments shall only be associated to Part/Document if they apply to all PartVersions or DocumentVersions

Since the object Occurrence (SingleOccurrence, SpecifiedOccurrence, ...) is not a distinct object in most PDM systems, but rather mapped together with the ViewOccurrenceRelationship (as NextAssemblyOccurrenceUsage), no customized properties shall be associated to the Occurrences. If needed, they should be all associated to the NextAssemblyOccurrenceUsage

***Postprocessor Recommendations:***

Each relevant customized property shall be mapped to the corresponding (standard or customized) property of the target PDM system.

If the target PDM system does not support multi-value properties (ValueSet/ValueList), ValueRange or ValueWithtolerances, these properties shall be either ignored or splitted into simple properties by the postprocessor.

DateTimeAssignments, ApprovalAssignments and OrganizationOrPersonInOrganizationAssignments associated to PartView or DocumentDefinition may be ignored. PropertyAssignments associated to PartVersion or DocumentVersion also.

If some customized PropertyAssignments, DateTimeAssignments, ApprovalAssignments or OrganizationOrPersonInOrganizationAssignments are associated to Part/Document, but the target PDM system hasn't got distinct part/document master/version objects, they shall be mapped only to those PartVersions or DocumentVersions that are coming along with this part/document in the XML file.

Customized properties associated to object Occurrence (SingleOccurrence, SpecifiedOccurrence, ...) shall be mapped as if they were associated to the corresponding NextAssemblyOccurrenceUsage

For the special case, where some customized properties need to be exchanged on PartViewRelationship, see chapter 7.4 for more details how to map and interpret them

## 15 Multi-View Product Structure Representation

*Note: This section is currently under development in the PDM-IF, based on user requirements. Definitions in this section might be changed or extended in future revisions of this document.*

This section describes how to represent multiple views of the product structure and how to keep relationship between these views.

**The different views covered are:**

- AsDesigned,
- AsPlanned,
- AsDocumented / AsCertified,
- AsPlanned,
- AsBuild,
- AsDelivered, and
- AsSupported / AsFlying / AsMaintained / AsOperated.

**The following topics are described in this chapter:**

- Multiple view concept
- Product structure with Part and Occurrence
- Product structure with IndividualPart
- Relationship for tracking usage

### 15.1 Multiple view concept

The view concept is managed via the Template “ViewContext” (see section 4.6.8). These views relate to virtual / physical instances of the products. Each instance can be identified by unique (within the organization) serial number (SN).

The ‘multi-SN keyword’ describes product structures defined with Part and Occurrence of Part.

The ‘on per SN’ keyword describes product structures defined with IndividualPart.

Mapping between the views introduced above and the LifeCycleStage concept:

- AsDesigned (multi-SN) => 'design'
- AsPlanned (multi SN) => 'manufacturing planning'
- AsDocumented / AsCertified (multi-SN) => 'documentation' or 'certification'
- AsPlanned (one per SN) => 'manufacturing realization'
- AsBuild (one per SN) => 'built' or 'manufactured'
- AsDelivered (one per SN) => 'delivery'
- AsSupported / AsFlying / AsMaintained / AsOperated (one per SN) => 'support'

The following table show values that should be used for the management of complex product structure with differents views.

<b>ViewContext.ApplicationDomain</b>	<b>ViewContext.LifeCycleStage</b>
'mechanical design' 'electrical design'	'design'
'mechanical design' 'electrical design'	'manufacturing planning'
'product delivery'	'documentation' or 'certification'
'mechanical design' 'electrical design'	'manufacturing realization'
'mechanical design' 'electrical design'	'built" or 'manufactured'
'product delivery'	'delivery'
'product support'	'support'

## 15.2 Product structure with Part and Occurrence

This chapter is for the representation of AsDesigned, AsPlanned (engineering), and AsDocumented/AsCertified.

This product structure is composed of Part and Occurrences. Each product structure contains a full set of information and support multiple effectivities / MSN:

- Part/PartVersion/PartView (Section 0)
- Properties (Section 0)
- Occurrence and relationship with matrix positioning (Section 7)

Even if the STEP information model allows multiple PartView under a PartVersion, for use cases with multiple view each product structure must be duplicate for compatibility with tools, i.e. one Part/PartVersion/PartView for AsDesigned products and a different Part/PartVersion/PartView for AsPlanned products. There is no restrictions for a STEP file to have multiple root nodes, one per view.

Example of “As designed and As planned” duplicate product structure

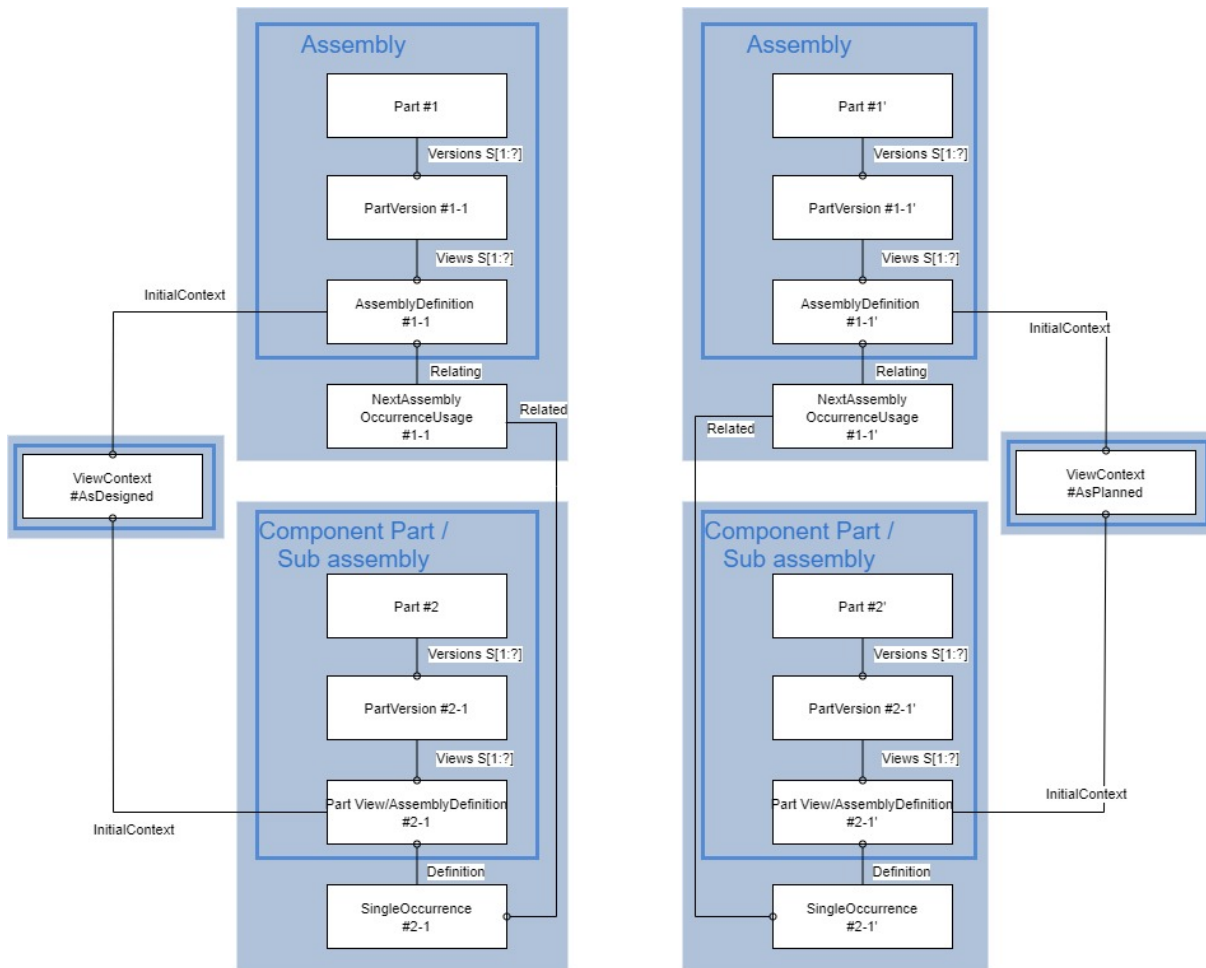


Figure 74 Representation of As Designed and As Planned views

### 15.3 Product structure with IndividualPart

This chapter is for the representation of AsPlanned (manufacturing), AsBuild, AsDelivered and AsSupported/AsFlying/AsMaintained/AsOperated product structure.

This representation based on IndividualPart objects is currently out of scope.

### 15.4 Relationship between views based on product structure with Part and Occurrence

To keep track of the usage of product between several views use the PartViewRelationship (section 7.4) only for the root nodes relation and OccurrenceRelationship for the other structure nodes.

Example of “As designed and As planned” product structure with their usage relationship on PartView and Occurrence

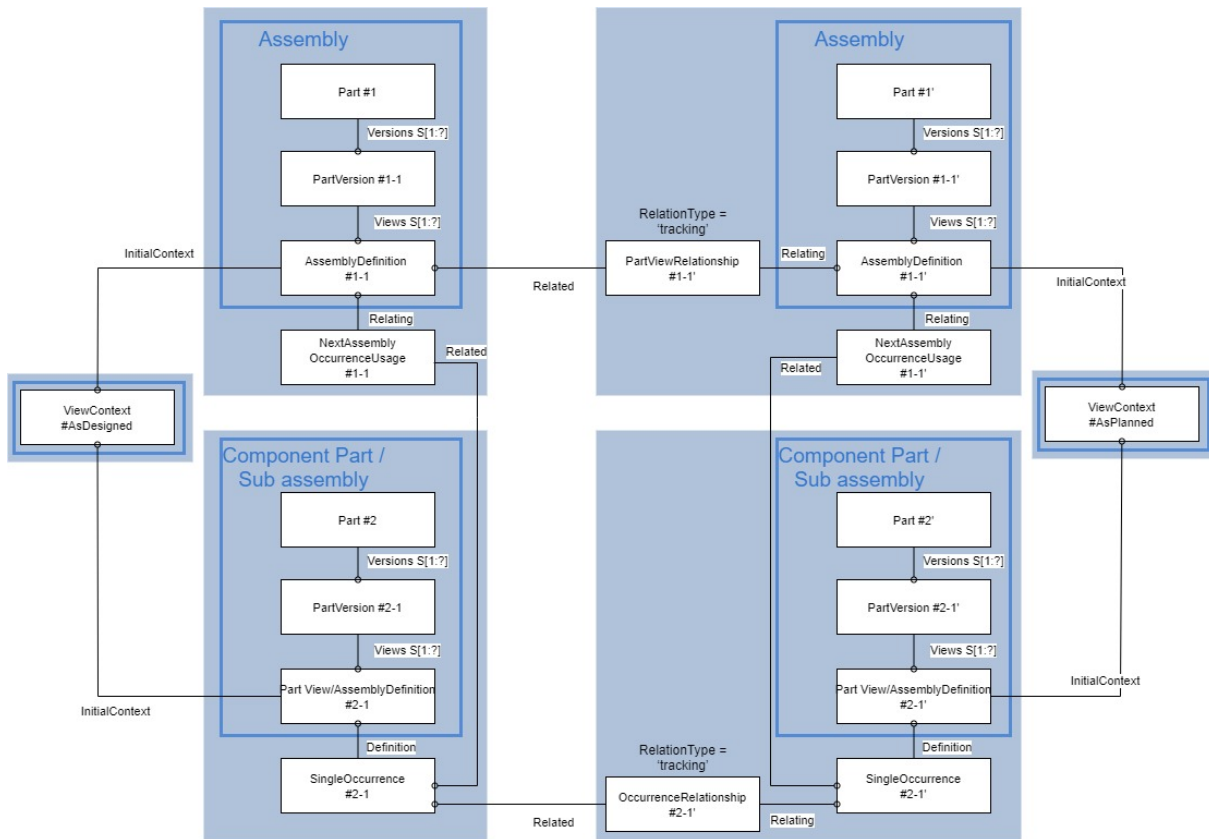


Figure 75 Representation of tracking relationship

**Postprocessor Recommendations:**

If OccurrenceRelationship is not supported by the target PDM system, it shall be mapped as PartViewRelationship and return a warning.

**15.4.1 PartViewRelationship usage for multi view**

See chapter 7.4.

The RelationType attribute should be set with 'tracking' value with ClassString type.

The Relating attribute represents the consumer in the relationship (example AsPlanned)

The Related attribute represents the consumed object in the relationship (example AsDesigned).

**15.4.2 OccurrenceRelationship usage for multi view**

See chapter 7.6.

The RelationType attribute should be set with 'tracking' value with ClassString type.

The Relating attribute represents the consumer in the relationship (example AsPlanned)

The Related attribute represents the consumed object in the relationship (example AsDesigned).



## 16 CAX-PDM Compatibility Guide

Due to the two different focusses of CAX systems and PDM systems, two mapping flavors have been described in chapter 0.

Hence, it is important for CAX systems to be able to read AP242 XML Files from a PDM system and vice versa. This chapter gives some good practices to avoid most common problems.

In addition to the general advises given in chapter 4.2.1 (Entities and Attributes not supported by the Preprocessor), in chapter 4.2.2 (Entities and Attributes not supported by the Postprocessor) and up to chapter 4.5, here are some typical challenges for the exchange between CAX and PDM systems.

### 16.1 CAX system to read a file coming from a PDM system

#### Dealing with multiple PartViews within a PartVersion

Since according chapter 5.1.2, the PartView.initialContext.applicationDomain shall contain a unique value over all PartView, the PartView having the value 'mechanical design' in applicationDomain shall be evaluated. The other ones can be ignored (exception: Composites Parts, see chapter 5.1.2).

#### Dealing with multiple PartVersions within a Part:

The product structure in AP242 is relating a particular version of an assembly with a particular version of its component parts. Therefore, it is sufficient to choose one of the versions of the top node and to traverse top-down the assembly structure (ignoring the other part versions).

If several versions of a component part are referenced in a (sub-)assembly, the version with the highest index that has geometry defined for it shall be chosen.

#### Dealing with multiple documents:

As stated in the chapter 8.1.1: multiple documents may be provided for each part by the PDM system. The CAX system shall always choose the document having DocumentTypes= 'primary geometry'. If no primary, but only secondary geometry is provided, the secondary shall be chosen.

If Document.DocumentTypes is set neither to primary nor to secondary geometry, some CAX postprocessors might choose the first DocumentAssignment, or the one that points to a known/support format (either by looking at FileFormat or at the suffix of the filename, but this is quite hazardous).

Of course, non-CAX documents shall never be exchanged as primary nor secondary geometry, and only one document per part shall be marked as primary or secondary geometry (except for alternate models, see below).

Remark: It is not recommended to rely on PartView.DefiningGeometry to find the primary geometry, since it is optional.

#### Dealing with multiple files:

Model splitting (as defined in chapter 11.2) may be supported as if each splitted model was a distinct part.

Model sharing (as defined in chapter 11.2) should be recognized so that the same CAX model is not being duplicated for each part it is used in.

Alternate models (as defined in chapter 11.2) may be supported, but like with configuration management data (see below), all the models will be cumulated although only one of them is built at a time.



### Dealing with QuantifiedOccurrence:

QuantifiedOccurrence with a quantity value 1 and unit 'each' can be handled like a SingleOccurrence.

QuantifiedOccurrence with an integer quantity value other than 1 and unit 'each' shall be mapped using as many SingleOccurrence as the quantity says. In such cases, maybe no 3D placement is provided (NextAssemblyOccurrenceUsage.Placement has no value) => use Identity matrix. In all cases, the real 3D placement is not provided by the PDM system...

QuantifiedOccurrence with a unit other than 'each' or a quantity value other than an integer shall be ignored.

### Dealing with configuration management data:

If the product structure has been provided with configuration management (effectivities), they will be ignored by the CAx system, but it means a 150% product structure will be loaded in the CAx system => many alternative components will be built at the same time, which is actually OK for this scenario.

### Dealing with PDM properties and with CAD user defined attributes:

Those PropertyValueAssignments recognized using PropertyValue.Name and/or PropertyDefinition.PropertyType (especially 'user defined attribute') and supported by the CAx system will get imported. The other ones can be ignored.

### Dealing with organizational data:

Id, version, name, description, approval status, creator/last modifier, creation/last modification date, etc... may be imported as user defined attributes (if supported) or ignored (except Part.Id).

If the CAx system cannot store multiple identifiers, refer to the Postprocessor Recommendation in 4.6.6.

If the CAx system does not support multiple languages for attributes of type Description, refer to the Postprocessor Recommendation in 4.6.7.

### Dealing with incremental exchange (as defined in chapter 9.4):

This shall be explicitly avoided during the PDM export, since the CAx postprocessor will probably have no mechanisms to merge this data with previously sent data...

## **16.2 PDM system to read a file coming from a CAx system**

### Dealing with kinematics or composites data:

If such information is not supported by the PDM system, it shall be ignored or mapped together with the geometry of the CAx files into the target format of the CAx files.

### Dealing with '/ANY':

As stated in chapter 4.2.1, PartVersion.Id='/ANY' means that the CAx system does not support versioning information. In this case, the PDM import shall decide to create a new version of the part or to reuse the highest existing version...

## 17 Outlook

As written in the introductory sections of this document, the Recommended Practices for AP242 BO Model XML Product and Assembly Structure have been written to guide implementations of the new BO Model XML format for the well-established exchange of product and assembly information. This document focuses on the core scope in the area of CAD-PDM interaction.

Since meta data and product structures are key data for almost all businesses and life cycle processes, it is clear that the agreements documented in this document have to be discussed with and accepted by all involved communities; users and implementors alike. User groups and implementor forums as described in the introduction in section 1.2 provide the platform for this. Also, in order to guarantee process stability, the documented agreements have to remain stable.

STEP Business Object Models and the XML representations are still a rather new concept, which is only now being implemented on a broad basis. This means that the data model will change over time, in order to address issues discovered during implementation, or to support new requirements. Annex B below gives an overview on such issues that are currently being worked by the AP242 project. In cases where future versions of the AP242 BO Model require changes to existing implementations, the recommended practices will clearly point out these differences and how to support them in pre- and postprocessors.

Building on this core scope, the data scope of AP242 BO Model XML implementations will increase in the future. Functionalities listed as out of scope of this document, for instance Composites or advanced PDM capabilities such as Configuration Management, will be addressed by the respective communities as soon as a stable basis has been established. These specific capabilities will then be defined in separate documents referencing this one where necessary. This will ensure the manageability of this document, and also allow the documentation of in-development capabilities to be updated more frequently without excessive harmonization overhead.

### 17.1 “Model-based” approach for future versions of this document

A model-based approach for capturing and interrelating recommended practices should be used, in order to allow:

- Easy publication through dynamic web sites;
- Easy change management and consistency with automated regeneration of documents from a valid model;
- An implementable document;
- Allow computer aided verification and validation

Principles introduced in the STEP new architecture:

- Definition of use cases called DEXs, describing the business need with templates vocabulary
- Definition of a building block mechanism called “Core Technical Capabilities”, describing a recommendation of use on a subset of the STEP AP242 BO Model entities

In order to prepare the future versions of this document, the concept of templates has been used (see a list of available templates in chapter 18). The next stage will be the creation of DEXs for automatic verification and validation.

## 18 List of Templates

This chapter gives a summary of the templates described in this document:

Name	Paragraph
Template "ExchangeContext"	4.6.1
Template "Organization"	4.6.2
Template "Unit"	4.6.3
Template "Class"	4.6.4
Template "Classification"	4.6.5
Template "Identifier"	4.6.6
Template "Description"	4.6.7
Template "ViewContext"	4.6.8
Template "NumericalValue"	4.6.9
Template "StringValue"	4.6.10
Template "DateTime"	4.6.11
Template "Approval"	4.6.12
Template "Person"	4.6.13
Template "PersonInOrganization"	4.6.14
Template "Part"	5.1
Template "Assembly"	5.1
Template "GeometricModel"	6.1
Template "PropertyAssignment"	6.2
Template "ShapeDependentProperty"	6.3
Template "SingleOccurrence"	7.1
Template "SpecifiedOccurrence"	7.2
Template "Simplified Positioning Representation"	7.3.1
Template "AlternatePartRelationship"	0
Template "AssemblyOccurrenceRelationshipSubstitution"	7.5.2
Template "Document"	8.1
Template "DocumentDefinitionRelationship"	8.2
Template "DocumentVersionRelationship"	8.3
Template "DigitalFile"	9.1
Template "FileRelationship"	9.2
Template "FormatProperty"	10.1
Template "ContentProperty"	10.2

Name	Paragraph
Template "CreationProperty"	10.3
Template "SizeProperty"	10.4
Template "DocumentFileProperty"	10.5
Template "CAx Representation for DocumentAssignment"	11.1
Template "PDM Representation for DocumentAssignment"	11.2
Template "PropertyDefinition"	12.2

## Annex A XML Schema derivation from BO Model EXPRESS Schema

This annex is derived from Annex B of **ISO/TS 10303-3001:2016 'Business object model: Managed model based 3D engineering business object model'**, which is part of the technical Corrigendum of ISO 10303-242 edition 1.

Especially examples have been added for the purpose of these recommended practices. To separate such additions clearly from the text of the standard, the following two notations are used:

- 1) Added text is formatted in italics;
- 2) Added text is inserted between horizontal lines and preceded by the statement **"The description between the lines is added for this recommended practices document."**

### A.1 General concepts

This section describes the general concepts for the derivation of the XML Schema from the corresponding BO Model EXPRESS Schema. These concepts were used to create the XML Schema Definition from the EXPRESS Schema using the configuration directives of ISO 10303-28; *exceptions may apply*.

#### A.1.1 Naming conventions

In general, the XML name derived from a BO MODEL EXPRESS identifier is the BO MODEL EXPRESS identifier modified with following rules:

- Names of XML elements and attributes shall be written using upper camel case.
- This convention requires removing underscore characters "\_" from EXPRESS names.

The structure of the EXPRESS model is preserved in XML:

- No changes in cardinality
- One EXPRESS instance is represented by one XML instance
  - No aggregation of several EXPRESS entities into one XML element
  - No splitting of one EXPRESS entity into several XML elements
- Reverting the direction of associations is allowed:
  - Does not violate the principle of structure preservation

#### A.1.2 Mapping of EXPRESS entity data types

For each EXPRESS entity data type declaration the XML Schema contain the definition of a new complex type corresponding to that EXPRESS entity data type.

```
<xsd:complexType name="PartVersion">
  <xsd:complexContent>
    <xsd:extension base="cmn:BaseObject">
      <xsd:sequence>
        <!-- the attributes of the entity -->
      </xsd:sequence>
    </xsd:extension>
  </xsd:complexContent>
</xsd:complexType>
```

For each EXPRESS attribute appearing in the entity declaration, the ComplexType shall contain one corresponding element.

By default, each complexType is based on cmn:BaseObject (defined in common.xsd).

For each entity data type that does not inherit from another entity data type, the complexType is based on cmn:BaseRootObject (defined in common.xsd). The BaseRootObjects occur as top level elements in the DataContainer and cannot be contained by any other element.

```
<xsd:complexType name="Part">  
  <xsd:complexContent>  
    <xsd:extension base="cmn:BaseRootObject">  
      <xsd:sequence>
```

...

In addition to the declaration of simple entity data types EXPRESS allows the specification of entity data types as subtypes of other entity data types. This establishes an inheritance relationship (subtype/supertype) and, through successive subtype/supertype relationships, an inheritance graph in which every instance of a subtype is also an instance of its supertype(s). An entity declared by using inheritance relationships with supertypes is said to be a complex entity data type.

```
<xsd:complexType name="ActualActivity">  
  <xsd:complexContent>  
    <xsd:extension base="Activity">  
      <xsd:sequence>  
        <!-- the attributes of the entity -->  
      </xsd:sequence>  
    </xsd:extension>  
  </xsd:complexContent>  
</xsd:complexType>
```

A complex entity data type inherits not only the EXPRESS attributes and rules appearing in the EXPRESS entity declarations of all of its supertypes, but also all the EXPRESS attributes and rules they inherit. So subtype entities are specialisations of any of their supertypes, where a specialisation means a more constrained form of the original declaration. The mapping of complex entity data types use the technique of derivation by extension for those entity data types that do not inherit from multiple supertypes. When a complex type is derived by extension, its effective content model is the content model of the base type plus the content model specified in the type derivation.

EXPRESS allows the declaration of entities that are not intended to be directly instantiated. For each EXPRESS entity data type declared to be ABSTRACT, the Schema shall contain an XML element declaration corresponding to the EXPRESS entity data type. The XML element shall be declared to be abstract so it cannot be used in a XML instance document.

There are some exceptions to the mapping described above that do not require one-to-one mapping between EXPRESS entity and XML Schema ComplexType:

- EXPRESS entities that have an equivalent that is already defined in XML Schema, e.g., dateTime, duration, language;
- Utilizing XML Schema constructs rather than one-to-one mapping, e.g. multilanguage support.

### A.1.3 Mapping of named data types

For each defined EXPRESS data type with a final underlying type of STRING, INTEGER, REAL, NUMBER or BOOLEAN the XML schema contains a new element using the corresponding built-in types of XML schema.

#### A.1.4 Mapping of SELECT data types

A SELECT data type has a select list where each item shall be an entity data type or a defined data type. SELECT data types that are used in EXPRESS are mostly created as cmn:Reference XML data types. In some cases (like in AxisPlacementOrTransformationSelect for AxisPlacement and CartesianTransformation, or in ClassSelect for ClassString) some elements of the SELECT type are mapped by containment. Therefore it is not needed to create SELECT type definitions. In order to make resolving of cmn:Reference and containments for SELECT types possible for each SELECT type an XML Schema Group definition shall be created. It shall contain the list of items that belong to the given SELECT type. Groups might be used for validation purposes.

```
<xsd:group name="TransformationSelect">
  <xsd:choice>
    <xsd:element name="CartesianTransformation" type="CartesianTransformation"/>
    <xsd:element name="GeometricRepresentationRelationship"
type="cmn:Reference"/>
  </xsd:choice>
</xsd:group>
```

#### A.1.5 Mapping of EXPRESS attributes

For each EXPRESS explicit attribute of an EXPRESS entity data type declaration the corresponding ComplexType in the XML Schema Definition shall contain an element definition. In case of EXPRESS attributes that have simple semantics (e.g., name, description, role, relationType, versionId etc.), XML *elements* shall be used.

There are four main cases of EXPRESS attribute mappings:

- Single attribute
  - by containment
  - by reference
- Aggregation attribute (SET, BAG, LIST, ARRAY)
  - by containment
  - by reference.

The order of elements is fixed - this shall be implemented by XML Schema sequence grouping.

*The order of the elements in the XSD is defined as following:*

- a) *alphabetic, with some rare exceptions*
- b) *the embedded objects come after the local attributes, also in alphabetic order, with some rare exceptions*
- c) *the inherited attributes come first (top-down from the supertype hierarchy), the local attributes at the very end*

*Example:*

*Entity A*

*Entity B, subtype of A*

*Entity C, subtype of B*

*Attributes of C:*

*Inherited attributes from A in alphabetical order*



*Embedded objects from A in alphabetical order*

*Inherited attributes from B in alphabetical order*

*Embedded objects from B in alphabetical order*

*Local attributes of C in alphabetical order*

*Local embedded objects of C in alphabetical order*

The name of the XML element shall be the name of the EXPRESS entity written in upper camel casing style. There are some exceptions from this rule:

- Identifier: role is mapped to idRoleRef;
- Identifier: identificationContext is mapped to idContextRef;
- ProcessedCore: Shape is mapped to ProcessedCoreShape;
- CompositeAssembly: Shape is mapped to CompositeAssemblyShape;
- Ply: Shape is mapped to PlyShape;
- PlyLaminate: Shape is mapped to PlyLaminateShape;
- PlyPiece: Shape is mapped to PlyPieceShape.

If the EXPRESS attribute is declared to be OPTIONAL, then the minOccurs pattern of the XML element shall be declared to be "0".

```
<xsd:complexType name="Activity">  
  <xsd:complexContent>  
    <xsd:extension base="cmn:BaseRootObject">  
      <xsd:sequence>  
        <xsd:element name="Requestor" type="DateAndPersonOrganization" minOccurs="0"/>  
      </xsd:sequence>  
    </xsd:extension>  
  </xsd:complexContent>  
</xsd:complexType>
```

An INVERSE attribute constraining to exactly one element (like ApprovingPersonOrganization. authorizedApproval of type Approval), as all INVERSE attributes, shall not be mapped to the XSD, but shall be used as an indicator to apply the XML containment.rules (i.e. to define ApprovingPersonOrganization as being contained into Approval). For more details, see below.

The re-declaration of EXPRESS attributes shall have no effect on XML schema declaration.

#### **A.1.5.1 EXPRESS attribute types corresponding to XML complex type**

The XML element corresponding to an EXPRESS attribute type that is an EXPRESS entity data type shall be mapped in one of following ways:

- XML element type shall be the name of a complexType defined in XML Schema. The element in the XML document shall be instantiated inside a parent element, i.e., the attribute shall be represented by containment.
- XML element type shall be defined as type="cmn:Reference". The attribute shall reference the uid attribute of an XML complexType corresponding to the EXPRESS entity data type of the attribute.

The XML element corresponding to an EXPRESS attribute whose data type is a SELECT data type shall reference the XML group defined for the SELECT.

```
<xsd:complexType name="AssemblyOccurrenceRelationship">  
  <xsd:complexContent>  
    <xsd:extension base="ViewOccurrenceRelationship">  
      <xsd:sequence>  
        <xsd:element name="Placement" minOccurs="0">  
          <xsd:complexType base="cmn:Reference" type="cmn:Reference"/>  
        </xsd:element>  
      </xsd:sequence>  
    </xsd:extension>  
  </xsd:complexContent>  
</xsd:complexType>
```



```
<xsd:group ref="TransformationSelect" minOccurs="0"/>
</xsd:element>
```

...

cmn:Reference in XML is untyped. To map the type of the referenced object from the EXPRESS schema, xsd:ref and xsd:keyref definitions are defined in the XSD. Based on XPATH, each xsd:keyref definition lists all the places where the referenced object may occur together with the xsd:ref of the referenced Entity. There is one xsd:ref per Entity and one xsd:keyref per attribute of type cmn:Reference plus one xsd:keyref per Entity. This allows automatic consistency check for XML file during XML Schema validation.

### A.1.5.2 EXPRESS attribute types corresponding to XML simple type

The XML element corresponding to an EXPRESS attribute whose data type is a defined data type with a final underlying type of STRING, INTEGER, REAL, NUMBER, or BOOLEAN shall be declared to have the XML type corresponding to the underlying type of the defined data type in the EXPRESS type declaration, if not otherwise specified in a configuration directive:

EXPRESS attribute type	ISO XML element type
NUMBER, REAL	xs:double
INTEGER	xs:integer
STRING	xs:string
BOOLEAN	xs:boolean

As suggested in ISO 10303-28, LOGICAL is mapped to a simpleType having a <xsd:restriction base="xsd:string">. Each value element is defined within it as <xsd:enumeration value="..."/>:

```
<xsd:simpleType name="logical">
  <xsd:restriction base="xsd:string">
    <xsd:enumeration value="false"/>
    <xsd:enumeration value="true"/>
    <xsd:enumeration value="unknown"/>
  </xsd:restriction>
</xsd:simpleType>
```

EXPRESS ENUMERATION types are mapped to a simpleType having a <xsd:restriction base="xsd:string">. Each value element is defined within it as <xsd:enumeration value="..."/>.

```
<xsd:simpleType name="ActuatedDirectionEnum">
  <xsd:restriction base="xsd:string">
    <xsd:enumeration value="bidirectional"/>
    <xsd:enumeration value="positive_only"/>
    <xsd:enumeration value="negative_only"/>
    <xsd:enumeration value="not_actuated"/>
  </xsd:restriction>
</xsd:simpleType>
```

If an EXPRESS attribute type REAL is mapped to an XML element type STRING, the format of this content string shall be according to IEEE 754-1985.

### A.1.5.3 Attributes with aggregate data types

Aggregations (by containment) are mapped as a sequence of elements with the EXPRESS type as name and type:

```

<Part uid="p--000000001E720B30">
  ...
  <Versions>
    <PartVersion uid="pv--000000001E720B30-id7">
      ...
      <Views>
        <PartView xsi:type="n0:AssemblyDefinition" uid="pvv--
000000001E720B30-id7">
          ...
        </PartView>
        <PartView xsi:type="n0:AssemblyDefinition" uid="pvv--
000000001E720B30-id8">
          ...
        </PartView>
      ...
    </Views>
  </PartVersion>
</Versions>
...
</Part>
  
```

Aggregations (by reference) are represented as a sequence of elements with the EXPRESS type as name and "cmn:Reference" as type:

```

<xsd:complexType name="Activity">
  <xsd:complexContent>
    <xsd:extension base="cmn:BaseRootObject">
      <xsd:sequence>
        <xsd:element name="PossibleMethods" minOccurs="0">
          <xsd:complexType>
            <xsd:sequence>
              <xsd:element name="ActivityMethod" type="cmn:Reference"
maxOccurs="unbounded"/>
            </xsd:sequence>
          ...
        ...
      ...
    ...
  ...
</xsd:complexType>
  
```

EXPRESS provides four kinds of aggregation data types: ARRAY, LIST, BAG and SET. These data types have as their domains collections of values of a given base data type where the base data type can be a simple type, a named type or another aggregation type.

The XML element corresponding to an aggregate valued EXPRESS attribute shall make use of maxOccurs= "unbounded".

Note: maxOccurs= "unbounded" most match the EXPRESS Type BAG, since redundant values are allowed. The uniqueness of the elements (like in a SET), the indexing of the elements (like in a LIST or an ARRAY) and OPTIONAL ARRAY values are not supported.

Multi-Dimensional Aggregates are mapped as one-dimensional.

Example: MomentsOfInertia.InertiaValue of kind ARRAY[1:3] OF ARRAY[1:3] OF NumericalValue; is mapped to:

```

<xsd:element name="NumericalValue" type="NumericalValue" max-
Occurs="9"/>
  
```

The ordering is in the order of sequence as the aggregates are defined, separated by blanks.

An exception is made for CartesianTransformation.RotationMatrix. This entity is defined as LIST[2:3] OF LIST[2:3] OF LengthMeasure, which is mapped to xsd:string for reasons of compactness. In both cases, the separator is a blank and the ordering of the elements is as follows: xx xy xz yx yy yz zx zy zz.

Some One-Dimensional Aggregates have been also mapped to `xsd:string` for reasons of compactness:

- `Direction.DirectionRatios` (LIST[2:3] OF REAL)
- `CartesianTransformation.TranslationVector` (LIST[2:3] OF LengthMeasure)
- `AxisPlacement.Axis/Position/RefDirection` (LIST[2:3] OF LengthMeasure)
- `CartesianPoint.Coordinates` (LIST[2:3] OF LengthMeasure)

Here the order is obvious: x y z.

### A.1.6 Not mapped EXPRESS Constructs

The UNIQUE, WHERE and global rules are not mapped to XML

### A.1.7 Containment and referencing rules

An EXPRESS attribute whose data type is an EXPRESS entity data type shall be mapped in one of the following ways:

- By containment
- By reference.

Containment is the preferred approach:

- It is recommended to use containment wherever possible.
- Reference should only be used for elements that are commonly reused.

Motivation:

- To place as much information as possible about an object within it highly increases human readability;
- Less complexity with script based analysis (e.g. XSLT);
- Increases the XSD validation quality.

Reference mapping rules:

- Master data - for elements defined directly under XML root element e.g., Organization, Person;
- Structure elements - for elements that are reused and referenced as structure elements e.g., Documents, Parts.

---

**The description between the lines is added for this recommended practices document.**

The following criteria apply for the reference type of mapping:

1. In case the referenced type is not an aggregate and is not a SELECT type: only the name of the attribute is mapped to the XSD, not the name of the referenced entity (since it is implicitly clear). In the case where a subtype is referenced, the subtype shall be given in a  `xsi:type` -clause.

```
<xsd:complexType name="ActivityAssignment">
  <xsd:complexContent>
    <xsd:extension base="cmn:BaseObject">
      <xsd:sequence>
        <xsd:element name="AssignedActivity" type="cmn:Reference"/>
      ...
    
```

Instantiated as:

```
<ActivityAssignment uid="ID_747">  
  <AssignedActivity uidRef="ID_400"/>  
</ActivityAssignment>
```

2. In case the referenced type is an aggregate or a SELECT type: the name of the attribute and the name of the referenced are given.

```
<xsd:element name="Description" minOccurs="0">  
  <xsd:complexType>  
    <xsd:group ref="DescriptorSelect" minOccurs="0"/>  
  </xsd:complexType>  
</xsd:element>
```

Instantiated as:

```
<ExchangeContext uid="ec--1">
```

...

```
  <Description>  
    <Descriptor uid="id123">  
      <Text>  
        <CharacterString>abcd</CharacterString>  
      </Text>  
    </Descriptor>  
  </Description>
```

Or in the case of an aggregate:

```
<xsd:element name="SameAs" minOccurs="0">  
  <xsd:complexType>  
    <xsd:group ref="ProxySelect" minOccurs="0" maxOccurs="un-  
bounded"/>  
  </xsd:complexType>  
</xsd:element>
```

Instantiated as:

```
<SameAs>  
  <ExternalOwlObject uidRef="ID_382"/>  
  <ProxyString>test</ProxyString>  
  <ExternalItem uidRef="ID401"/>  
  <Proxy uidRef="ID402"/>  
</SameAs>
```

---

Containment mapping rules:

- Simple attributes e.g., String values;
- Elements that cannot exist standalone, but depend on another object and cannot be reused e.g., DateTime, TranslatedString, PropertyValue;
- Grouping of elements in master-revision pattern, like Part -> PartVersion, Document -> DocumentVersion (usually the EXPRESS schema defines a mandatory INVERSE attribute for the contained element, for example PartVersion.versionOf);
- For relationships containment shall be performed along the relating attribute (see below);
- A contained element cannot be defined as BaseRootObject.

---

The description between the lines is added for this recommended practices document.

The following criteria apply for the containment type of mapping:

1. In case the contained type is not an aggregate and is not a SELECT type: only the name of the attribute is mapped to the XSD, not the name of the contained entity (since it is implicitly clear). In the case where a subtype is contained, the subtype shall be given in a `xsi:type`-clause.

```
<xsd:complexType name="AssemblyJoint">
  <xsd:complexContent>
    <xsd:extension base="cmn:BaseObject">
      <xsd:sequence>
        <xsd:element name="AssemblyShape" type="AssemblyDefinition"/>
        ...
      </xsd:sequence>
    </xsd:extension>
  </xsd:complexContent>
</xsd:complexType>
```

2. In case the contained type is an aggregate or a SELECT type: the name of the attribute and the name of the contained entity are given.

```
<xsd:complexType name="Part">
  <xsd:complexContent>
    <xsd:extension base="cmn:BaseRootObject">
      <xsd:sequence>
        ...
        <xsd:element name="Versions">
          <xsd:complexType>
            <xsd:sequence>
              <xsd:element name="PartVersion" type="PartVersion" max-
                Occurs="unbounded"/>
            </xsd:sequence>
          </xsd:complexType>
        </xsd:element>
      </xsd:sequence>
    </xsd:extension>
  </xsd:complexContent>
</xsd:complexType>
```

Instantiated as:

```
<Part uid="p--0000000017D374A0">
  ...
  <Versions>
    <PartVersion uid="pv--0000000017D374A0--id1">
      ...
    </PartVersion>
    <PartVersion uid="pv--0000000017D374A0--id2">
      ...
    </PartVersion>
  </Versions>
</Part>
```

3. In case of change of direction for associations, see the next paragraph.

---

## A.1.8 Change of Direction for Associations

For various associations in the EXPRESS representation of the Business Object Model, the directions have been inverted:

- The original attribute is omitted.
- A new attribute is added to the originally reference entity.

```
ENTITY MeasuredCharacteristic
...
measureActivity : OPTIONAL MeasureActivitySelect;
...
TYPE MeasureActivitySelect = SELECT
(Activity,...

<xsd:complexType name="Activity" abstract="true">
  <xsd:complexContent>
    <xsd:extension base="cmn:BaseRootObject">
      <xsd:sequence>
        <xsd:element name="MeasuredCharacteristic" type="MeasuredCharac-
teristic" minOccurs="0" maxOccurs="unbounded"/>

```

The advantage of this 'reverse' mapping is to see all the characteristics (like dates, approvals, projects, persons and organizations, properties, ...) of one object at one single place, that is, within the object.

### A.1.8.1 Entities of kind Relationship

Entities of kind ...Relationship, which are instantiated once in EXPRESS and reference one or many relating instances, are mapped (and instantiated separately) in the relating object. The relating attribute is omitted.

The related attribute is mapped by reference.

*Example:*

```
ENTITY ActivityRelationship;
...
relating : Activity;
related : Activity;
...
END_ENTITY;

<xsd:complexType name="Activity" abstract="true">
  <xsd:complexContent>
    <xsd:extension base="cmn:BaseRootObject">
      <xsd:sequence>
        <xsd:element name="ActivityRelationship" type="ActivityRela-
tionship" minOccurs="0" maxOccurs="unbounded"/>
      ...
    </xsd:complexContent>
  </xsd:complexType>
  <xsd:complexType name="ActivityRelationship">
    <xsd:complexContent>
      <xsd:extension base="cmn:BaseObject">
        <xsd:sequence>
          <xsd:element name="Related" type="cmn:Reference"/>
        ...
      </xsd:complexContent>
    </xsd:complexType>
  </xsd:complexType>

```

### A.1.8.2 Entities of kind Assignment

Entities of kind ...Assignment, which are instantiated once in EXPRESS and reference one or many 'assignedTo' instances, are mapped (and instantiated separately) in each assignedTo object.

The assignedTo attribute is omitted. The assignedXxx attribute is mapped by reference.

*Example:*

```
ENTITY DateTimeAssignment;
id : OPTIONAL IdentifierSelect;
```

```
description : OPTIONAL DescriptorSelect;  
classifiedAs : OPTIONAL SET[1:?] OF Classification;  
role : ClassSelect;  
assignedDate : DateTimeString;  
assignedTo : SET[1:?] OF DateTimeAssignmentSelect;  
END_ENTITY;
```

is mapped to XML in each member element of *DateTimeAssignmentSelect* (there are about 130 of them), for example in *Activity*:

```
<xsd:complexType name="Activity" abstract="true">  
  <xsd:complexContent>  
    <xsd:extension base="cmn:BaseRootObject">  
      <xsd:sequence>  
        ...  
        <xsd:element name="DateTimeAssignment" type="DateTimeAssign-  
ment" minOccurs="0" maxOccurs="unbounded"/>  
        ...  
      </xsd:sequence>  
    </xsd:extension>  
  </xsd:complexContent>  
</xsd:complexType>
```

The semantic is nearly the same (at least within the scope of a single XML file): the SET attribute *DateTimeAssignment.AssignedTo* can be computed out of all *DateTimeAssignments* where *DateTimeAssignedDate* points to the same *DateTimeString*.

*Note: In the TC of ISO 10303-242 edition 1, all assignedTo attributes defined as SET[1:?] were changed to single values (no SETs anymore).*

---

**The description between the lines is added for this recommended practices document.**

### **A.1.8.3 Special mapping for RepresentationContext, Representation and RepresentationItem**

*In the edition 1 XSD, RepresentationItems (CartesianPoint, KinematicPair, ...) were embedded into the Representations (i.e. GeometricModel). Therefore it was not possible to reuse the same RepresentationItem in multiple Representations (but was a strong requirement).*

*Rather than RepresentationItem would become a root object, since the conceptual idea is to relate a Representation and a RepresentationItem within a given context, it was decided to embed RepresentationItem into RepresentationContext (i.e. GeometricCoordinateSpace) and to reference the RepresentationItems from the Representation. The resulting redundancy is not in contradiction to the EXPRESS schema.*

*According to the main mapping rule: "Containment is the preferred approach: It is recommended to use containment wherever possible; Reference should only be used for elements that are commonly reused", Representation is also embedded into RepresentationContext.*

```
ENTITY Representation  
  SUPERTYPE OF (GeometricRepresentation);  
...  
  contextOfItems : RepresentationContext;  
  items : SET[1:?] OF RepresentationItem;  
...  
END_ENTITY;
```

```
ENTITY RepresentationContext  
  SUPERTYPE OF (GeometricCoordinateSpace);
```



...  
 END\_ENTITY;

*is mapped to XML in the following way:*

```
<xsd:complexType name="Representation">
  <xsd:complexContent>
    <xsd:extension base="cmn:BaseObject">
      <xsd:sequence>
...
          <xsd:element name="Items">
            <xsd:complexType>
              <xsd:sequence>
                <xsd:element name="Representa-
tionItem" type="cmn:Reference" maxOccurs="unbounded"/>
              </xsd:sequence>
            </xsd:complexType>
          </xsd:element>
...
        </xsd:sequence>
      </xsd:extension>
    </xsd:complexContent>
  </xsd:complexType>
<xsd:complexType name="RepresentationContext">
  <xsd:complexContent>
    <xsd:extension base="cmn:BaseRootObject">
      <xsd:sequence>
...
          <xsd:element name="Representations" minOccurs="0">
            <xsd:complexType>
              <xsd:sequence>
                <xsd:element name="Representation"
type="Representation" maxOccurs="unbounded"/>
              </xsd:sequence>
            </xsd:complexType>
          </xsd:element>
          <xsd:element name="Items" minOccurs="0">
            <xsd:complexType>
              <xsd:sequence>
                <xsd:element name="Representa-
tionItem" type="RepresentationItem" maxOccurs="unbounded"/>
              </xsd:sequence>
            </xsd:complexType>
          </xsd:element>
        </xsd:sequence>
      </xsd:extension>
    </xsd:complexContent>
  </xsd:complexType>
</xsd:complexType>
```

*as if the EXPRESS schema was like this:*

```
ENTITY RepresentationContext
  SUPERTYPE OF (GeometricCoordinateSpace);
...
  representations : OPTIONAL SET[1:?] OF Representation;
DERIVE
  items : SET[1:?] OF RepresentationItem := (* sum of all representat
ions.items *);
END_ENTITY;

ENTITY Representation
```



```
SUPERTYPE OF (GeometricRepresentation);  
...  
  items : SET[1:?] OF RepresentationItem;  
...  
INVERSE  
  contextOfItems : RepresentationContext FOR representations;  
END_ENTITY;
```

*This XML mapping solution complies to the STEP philosophy and to the modelling possibilities of EXPRESS, without changing too much te EXPRESS schema.*

---

---

## A.1.9 Representation of Id Attribute

Two representations are supported:

- Compact representation of the most used variant “simple string“;
- Optimized representation for the other variants:
  - Associated context and/or role;
  - Multiple identifiers.

```
<xsd:complexType name="Id">  
  <xsd:sequence>  
    <xsd:element name="Identifier" type="Identifier" minOccurs="0" max-  
Occurs="unbounded"/>  
  </xsd:sequence>  
  <xsd:attribute name="id" type="xsd:string" use="optional"/>  
</xsd:complexType>  
<xsd:complexType name="Identifier">  
  <xsd:complexContent>  
    <xsd:extension base="cmn:BaseObject">  
      ...  
      <xsd:attribute name="id" type="xsd:string" use="optional"/>  
      <xsd:attribute name="idRoleRef" type="xsd:string" use="optional"/>  
      <xsd:attribute name="idContextRef" type="xsd:string" use="optional"/>  
    </xsd:extension>  
  </xsd:complexContent>  
</xsd:complexType>
```

Notes:

- idRoleRef references the uid of a Class, ExternalClass or ExternalOwlClass;
- idContextRef references the uid of an Identifier or an Organization;
- if Identifier is set, Id.id shall not be set.

Examples:

```
<Class uid="rl--ii">  
  <Id id="identification information"/>  
</Class>  
<Organization uid="o-1">  
  <Id id="mercedes-benz.com"/>  
</Organization>  
<Part uid="p-1">  
  <Id>
```

```

    <Identifier uid="pid-1" id="as1" idRoleRef="rl--ii" idContextRef="o-1"/>
  </Id>
  ...
</Part>
<Part uid="p-1">
  <Id>
    <Identifier uid="pid-1" id="as1" idRoleRef="rl--ii" idContextRef="o-1"/>
    <Identifier uid="pid-2" id="assy1" idRoleRef="rl--ii" idContextRef="o-2"/>
  </Id>
  ...
</Part>

```

### A.1.10 Multilanguage Support

Two representations are supported:

- Compact text strings with optional language indication;
- xsd:language is used for the language indication:
  - Country and language code conforming to RFC 3066.

```

<xsd:group name="MultiLingualStringSelect">
  <xsd:choice>
    <xsd:element name="CharacterString" type="xsd:string"/>
    <xsd:element name="LocalizedString" type="LocalizedString" maxOccurs="unbounded"/>
  </xsd:choice>
</xsd:group>
<xsd:complexType name="LocalizedString" mixed="true">
  <xsd:complexContent mixed="true">
    <xsd:extension base="cmn:BaseObject">
      <xsd:attribute name="lang" type="xsd:language" use="optional"/>
    </xsd:extension>
  </xsd:complexContent>
</xsd:complexType>

```

Example:

```

<ActivityMethod uid="am-2">
  <Consequence>
    <LocalizedString>no consequence</LocalizedString>
    <LocalizedString lang="en-GB">no consequence</LocalizedString>
    <LocalizedString lang="de-DE">keine Konsequenz</LocalizedString>
    <LocalizedString lang="fr-FR">aucune conséquence</LocalizedString>
  </Consequence>
</ActivityMethod>

```

The business object definition refers to ISO 639-2 for the language code and to ISO 3166-1 for the country code. They enable the specification of a language code optionally followed by a country code, for example, 'en' or 'en-US'. The EXPRESS TYPE "Language" defined as LIST[1:2] OF STRING is mapped to XML as xsd:language, where the language code and the country code are concatenated (the country code is optional).

The W3C definition of xsd:language englobes these two ISO standards plus further ones in RFC 3066 (IANA and unofficial languages) => these shall not be used.

### A.1.11 Representation of Date and Time

xsd:dateTime is used instead of String.

*As in EXPRESS*, Time is not optional; to avoid conversion problems it shall be provided as "T00:00:00".

### A.2 Unit of Serialization

To be valid XML, a DataContainer has to be included into an UoS object (Unit of Serialization) defined in common.xsd. The UoS contains a mandatory header element that contains administrative information that characterizes the content of the data package.

The header elements are described in ISO 10303-28:2007, section 5.2, as follows:

- Name: human readable identifier for the XML resource;
- TimeStamp: date and time when the XML resource was created;
- Author: identifies the person or group of persons who created the XML resource;
- Organization: identifies the organization that created, or is responsible for the XML resource;
- PreprocessorVersion: identifies the software system that created the XML resource itself, including platform and version identifiers;

NOTE: The `preprocessor_version` will identify the system that was used to produce the XML resource. It may well be distinct from the software system that created or captured the original information.

- OriginatingSystem: identifies the software system that created or captured the information contained in the XML resource, including platform and version identifiers;
- Authorization: specifies the release authorization for the XML resource and the signatory, where appropriate;

NOTE: This may be distinct from the authorizations for various information units contained within the document.

- Documentation: free text field for information.

common.xsd is defined under <http://standards.iso.org/iso/ts/10303/-3000/-ed-2/tech/xml-schema/common>.

### A.3 XML configuration specification

This section contains the configuration specification.

```
<iso_10303_28 version="" xmlns="urn:iso:std:iso:10303:-28:ed-2:tech:XMLschema:document" xmlns:cnf="urn:iso:std:iso:10303:-28:ed-2:tech:XMLschema:configuration_language" xmlns:exp="urn:iso:std:iso:10303:-28:ed-2:tech:XMLschema:common" xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance" xsi:schemaLocation="urn:iso:std:iso:10303:-28:ed-2:tech:XMLschema:document
../../implementation_resources/iso10303_28_document_schema/doc.xsd
urn:iso:std:iso:10303:-28:ed-2:tech:XMLschema:configuration_language
../../implementation_resources/iso10303_28_configuration_language_schema/cnf.xsd
urn:iso:std:iso:10303:-28:ed-2:tech:XMLschema:common
../../implementation_resources/iso10303_28_base_xml_schema/exp.xsd ">
</iso_10303_28>
```

## Annex B Known Issues

This section lists known issues with the AP242 Business Object Model, both related to the assembly structure and to other domains within the BO Model. These issues concern errors in the XSD, mismatches between the EXPRESS and XML schemas, deficiencies in the documentation and other issues that have already been communicated to the AP242 maintenance / development team for resolution. Many of these have been resolved by the Technical Corrigendum 1 (TC1) of AP242, which was published in 2016.

Issue# (Link)	Short Description	Target Milestone	Status March 2019
<a href="#">#4907</a>	DataEnvironment.name too complex	AP242ed2	Confirmed
<a href="#">#4911</a>	Restrict population in BO for DataEnvironment.characterization	AP242ed2	Confirmed
<a href="#">#4913</a>	mapping specifications for ConditionalConfiguration and ConditionalEffectivity	AP242ed2	Confirmed
<a href="#">#4925</a>	CartesianTransformation.scale can't be mapped	AP242ed2	Confirmed
<a href="#">#4927</a>	ConditionalConfiguration and ConditionalEffectivity not mapped	AP242ed2	Confirmed
<a href="#">#4929</a>	invalid mapping specification syntax in BO mapping templates.	AP242ed2	Confirmed
<a href="#">#4932</a>	Missing concepts	AP242ed2	Confirmed
<a href="#">#4933</a>	RequirementAssignment.assignedTo mapping: BOM/ARM select type alignment	AP242ed2	Confirmed
<a href="#">#4934</a>	Mapping not possible for: RequirementRelationship, BreakdownElementRelationship, BreakdownRelationship and IndividualPartRelationship	AP242ed2	Confirmed
<a href="#">#4935</a>	RequirementSatisfactionAssertion.assertedBy mapping not possible	AP242ed2	Confirmed
<a href="#">#4936</a>	RequirementSatisfactionAssertion.satisfiedBy mapping: BOM/ARM select type alignment	AP242ed2	Confirmed
<a href="#">#4937</a>	RequirementSource.source mapping: BOM/ARM select type alignment	AP242ed2	Confirmed
<a href="#">#4938</a>	How to map AssemblyRealization-Context	AP242ed2	Confirmed
<a href="#">#4939</a>	InformationRight.owners mapping not possible	AP242ed2	Confirmed

Issue# (Link)	Short Description	Target Milestone	Status March 2019
<a href="#">#4940</a>	InformationUsageRightAssignment.isAssignedTo mapping: BOM/ARM select type alignment	AP242ed2	Confirmed
<a href="#">#4941</a>	AlternativeSolutionRelationship mapping not possible	AP242ed2	Confirmed
<a href="#">#4942</a>	How to map BreakdownElementRealization	AP242ed2	Confirmed
<a href="#">#4943</a>	How to map ComponentPlacement & OccurrencePlacement	AP242ed2	Confirmed
<a href="#">#4944</a>	FinalSolution mapping not possible	AP242ed2	Confirmed
<a href="#">#4945</a>	How to map FunctionalBreakdownElementViewAssociation	AP242ed2	Confirmed
<a href="#">#4946</a>	InZone mapping not possible	AP242ed2	Confirmed
<a href="#">#4949</a>	Incomplete map--AddElement to DeltaChangeManagementObjectSelect (as currentDesignObject)	AP242ed2	Confirmed
<a href="#">#4950</a>	Incomplete map--AddElement to DeltaChange.describedChange incomplete in ARM	AP242ed2	Confirmed
<a href="#">#4951</a>	Change "InformationUsageRightAssignment.isAssignedTo" to "InformationUsageRightAssignment.assignedTo"	Addressed in TC1	Resolved, fixed
<a href="#">#4961</a>	GeometricRepresentationRelationshipWithSameCoordinateSpace--no corresponding ARM AO or RULE	AP242ed2	Confirmed
<a href="#">#4966</a>	unnecessary mapping specifications included in mapping table	AP242ed2	Confirmed
<a href="#">#4984</a>	ProductPlannedToRealized missing in SUPERTYPE clause of IndividualPartVersionRelationship	Addressed in TC1	Resolved, fixed
<a href="#">#4985</a>	MaterialPropertyDefinition missing in SUPERTYPE clause of PropertyDefinition	Addressed in TC1	Resolved, fixed
<a href="#">#5007</a>	Representation of CartesianTransformation in XML	Addressed in TC1	Resolved, fixed
<a href="#">#5067</a>	Assignments in the AP242 BOM EXPRESS are of cardinality SET[1:?]	Addressed in TC1	Resolved, fixed

Issue# (Link)	Short Description	Target Milestone	Status March 2019
<a href="#">#5069</a>	offset is required for some types of conversion_based_unit	AP242ed2	Reopened
<a href="#">#5078</a>	Instantiation of SpecifiedOccurrence in XSD is not possible	Addressed in TC1	Resolved, fixed
<a href="#">#5079</a>	Definition and support of UNIQUE rules	Harmonization of AP239 and AP242	Rejected for TC, but reopened
<a href="#">#5080</a>	Definition and support of WHERE rules	AP242e2	Rejected for TC, but reopened
<a href="#">#5081</a>	Cardinality Constraints	Addressed in AP242e1	Resolved, rejected
<a href="#">#5082</a>	Multidimensional Aggregates	Addressed in TC1	Resolved, fixed
<a href="#">#5083</a>	Mapping of the INVERSE attributes	Addressed in TC1	Resolved, fixed
<a href="#">#5084</a>	Mappng of attributes of type LOGICAL	Addressed in TC1	Resolved, fixed
<a href="#">#5085</a>	Mapping of attributes of type ENUMERATION	Addressed in TC1	Resolved, fixed
<a href="#">#5086</a>	Multiple inheritance for ConditionalEffectivities and the other subtypes of Effectivity	Harmonization of AP239 and AP242	Resolved, fixed
<a href="#">#5087</a>	key and keyref	Addressed in TC1	Resolved, fixed
<a href="#">#5088</a>	URL of XML Schema	Addressed in TC1	Resolved, fixed
<a href="#">#5089</a>	idRoleRef	Addressed in TC1	Resolved, fixed
<a href="#">#5090</a>	Two identifier values are possible in XML	Addressed in TC1	Resolved, fixed
<a href="#">#5091</a>	CartesianTransformation.TranslationVector	Addressed in TC1	Resolved, fixed
<a href="#">#5092</a>	AxisPlacement.Position	Addressed in TC1	Resolved, fixed
<a href="#">#5093</a>	CreationProperty.CreatingSystem	Addressed in TC1	Resolved, fixed
<a href="#">#5094</a>	EXPRESS attributes renamed in the XSD	Addressed in TC1	Resolved, fixed
<a href="#">#5095</a>	ViewOccurrenceRelationship.relationType	Addressed in TC1	Resolved, fixed
<a href="#">#5107</a>	Bug in the XSD schema for composite capabilities	Addressed in TC1	Resolved, fixed
<a href="#">#5110</a>	Describe common.xsd in the annex B	Addressed in 10303-28, clause 5.2	Resolved, rejected
<a href="#">#5111</a>	Definition and applicable values for File.FileType	Addressed in TC1	Resolved, fixed

Issue# (Link)	Short Description	Target Milestone	Status March 2019
<a href="#">#5123</a>	No Mapping specification provided for capability AMW1	AP242ed2	Confirmed
<a href="#">#5124</a>	No Mapping specification provided for capability C1	AP242ed2	Confirmed
<a href="#">#5125</a>	No Mapping specification provided for capability SBC4	AP242ed2	Confirmed
<a href="#">#5126</a>	No Mapping specification provided for capability PP1	AP242ed2	Confirmed
<a href="#">#5127</a>	No Mapping specification provided for capability GMI1	AP242ed2	Confirmed
<a href="#">#5128</a>	No Mapping specification provided for capability GMI2	AP242ed2	Confirmed
<a href="#">#5129</a>	No Mapping specification provided for capability GMI5	AP242ed2	Confirmed
<a href="#">#5130</a>	No Mapping specification provided for capability GMI8	AP242ed2	Confirmed
<a href="#">#5131</a>	No Mapping specification provided for capability AMW2	AP242ed2	Confirmed
<a href="#">#5132</a>	No Mapping specification provided for capability AMW3	AP242ed2	Confirmed
<a href="#">#5133</a>	No Mapping specification provided for capability DM1	AP242ed2	Confirmed
<a href="#">#5134</a>	No Mapping specification provided for capability CSS	AP242ed2	Confirmed
<a href="#">#5135</a>	Mapping specification uncomplete for capability SBC2	AP242ed2	Confirmed
<a href="#">#5136</a>	Mapping specification uncomplete for capability SBC5	AP242ed2	Confirmed
<a href="#">#5137</a>	Mapping specification uncomplete for capability PPP1	AP242ed2	Confirmed
<a href="#">#5138</a>	Mapping specification uncomplete for capability C2	AP242ed2	Confirmed
<a href="#">#5139</a>	Mapping specification uncomplete for capability PP2	AP242ed2	Confirmed
<a href="#">#5140</a>	Mapping specification uncomplete for capability RR3	AP242ed2	Confirmed
<a href="#">#5141</a>	Mapping specification uncomplete for capability GMI6	AP242ed2	Confirmed
<a href="#">#5153</a>	semantical type checking in bom.xsd for PartView.ClassifiedAs	Addressed in TC1	Resolved, fixed



Issue# (Link)	Short Description	Target Milestone	Status March 2019
<a href="#">#5155</a>	ShapeElement defined as RootObject, but misses the attribute 'ElementOf'	Addressed in TC1	Resolved, fixed
<a href="#">#5206</a>	3001 BO-Model maps to AO Condition that is not in AP242 ARM	AP242ed2	Confirmed
<a href="#">#5214</a>	Separation of real Parts, Templates, Parts defined by specification, Designs	Harmonization of AP239 and AP242	New
<a href="#">#5267</a>	Date-Time as a string	AP242ed2	New
<a href="#">#5270</a>	Configuration_effectivity for a 150% product structure	AP242ed2	New
<a href="#">#5404</a>	Mapping of DateTimeString to "xsd:dateTime"	AP242ed2	New
<a href="#">#5429</a>	Part_view_definition combinations with Part_usage_view resp. Part_design_view	AP242ed2	In progress
<a href="#">#5447</a>	Missing attribute in ConditionalConfiguration entity	Addressed in TC1	Resolved, fixed
<a href="#">#5471</a>	Replace Identification_assignment by identifierSelect for all target id attributes	AP242ed2	Confirmed
<a href="#">#5501</a>	Entity Part express definition differs from documentation note 4	Addressed in TC1	Resolved, fixed
<a href="#">#5518</a>	Entities not attached to a capabilities	Addressed in TC1	Resolved, fixed
<a href="#">#5532</a>	Product_view_definition: Why the mapping crosswise exchange name and description?	AP242ed2	New
<a href="#">#5558</a>	Header.Documentation as LIST	No milestone set	Confirmed – Bug <a href="#">#5852</a> raised against 10303-28
<a href="#">#5616</a>	GeometricRepresentationRelationshipWithSameCoordinateSpace must be definitional	Addressed in TC1	Resolved, fixed
<a href="#">#5619</a>	Introduce 'GeneralGeometricRepresentationRelationship' as subtype of 'GeometricRepresentationRelationship' with attribute 'RelationshipType'	Addressed in TC1	Resolved, fixed
<a href="#">#5620</a>	Change PartView.DefiningGeometry to a SET	Addressed in TC1	Resolved, fixed



Issue# (Link)	Short Description	Target Milestone	Status March 2019
<a href="#">#5664</a>	RepresentationItem shall be referenced rather than being embedded	Addressed in TC1	Resolved, fixed
<a href="#">#5665</a>	RepresentationItem.External should be a reference and not embedded	No action	Resolved, rejected
<a href="#">#5666</a>	Clarifications needed concerning Kinematics	Addressed in TC1	Resolved, fixed
<a href="#">#5667</a>	Incorporate Part105 into the BO Model documentation	Reommended Practices for kinematics	Resolved, wont fix
<a href="#">#5668</a>	Embed KinematicLinkToOccurrenceAssociation into KinematicLink	Addressed in TC1	Resolved, fixed
<a href="#">#5669</a>	Embed KinematicMechanismAssociation into Mechanism	Addressed in TC1	Resolved, fixed
<a href="#">#5682</a>	Merge QuantityOccurrence and selectedOccurence	Addressed in TC1	Resolved, fixed
<a href="#">#5688</a>	Restructure AssemblyJoint	Addressed in TC1	Resolved, fixed
<a href="#">#5693</a>	Generic Representation and RepresentationContext	Addressed in TC1	Resolved, fixed
<a href="#">#5695</a>	Invalid mapping of Mated_part_relationship.relater and related	AP242ed2	New
<a href="#">#5698</a>	Generic Representation and RepresentationContext	Addressed in TC1	Resolved, fixed
<a href="#">#5709</a>	Constrain ComposedGeometricModel	Addressed in TC1	Resolved, fixed
<a href="#">#5710</a>	Change Lengthmeasure in CartesianTransformation to REAL	Addressed in TC1	Resolved, fixed
<a href="#">#5711</a>	Bug in the XSD schema for Requirement capability	Addressed in TC1	Resolved, fixed
<a href="#">#5716</a>	Need normative documentation for common.xsd	AP242ed2	Confirmed
<a href="#">#5724</a>	Description of Occurrence.definition is wrong	Addressed in TC1	Resolved, fixed
<a href="#">#5728</a>	AP242 missing in FormatProperty.dataFormat	Addressed in TC1	Resolved, fixed
<a href="#">#5730</a>	Description of SpecificationConditionAssignment.conditionType for 'validity' is wrong	Addressed in TC1	Resolved, fixed
<a href="#">#5731</a>	EffectivityAssignment wrong embedment in the XSD	Addressed in TC1	Resolved, fixed

Issue# (Link)	Short Description	Target Milestone	Status March 2019
<a href="#">#5811</a>	Mispelling in PartVersionToIndividualPartVersionAssociation, PartToIndividualPartAssociation	Addressed in TC1	Resolved, fixed
<a href="#">#5868</a>	Introduce generic Representation-Relationship as a superType of GeometricRepresentationRelationship	Addressed in TC1	Resolved, fixed
<a href="#">#5873</a>	PlyLaminateSequenceDefinition embedded instead of being referenced	Addressed in TC1	Resolved, fixed
<a href="#">#5885</a>	Update the ARM for multi identification , naming, descriptions	AP242ed2	Confirmed
<a href="#">#5886</a>	./VersionId/Identifier missing in Identifier_idContextRef_key	Addressed in TC1	Resolved, fixed
<a href="#">#5887</a>	typo in Identifier_idContextRef_keyRef	Addressed in TC1	Resolved, fixed
<a href="#">#5888</a>	Error in GeometricRepresentation-RelationshipWithSameCoordinateSpace	Addressed in TC1	Resolved, fixed
<a href="#">#5889</a>	Error in GeometricRepresentation-Relationship	Addressed in TC1	Resolved, fixed
<a href="#">#5890</a>	XSD validation errors with IdentifierSet and with DescriptionContext of type "Identifier"	Addressed in TC1	Resolved, fixed
<a href="#">#6003</a>	Associating a LinkMotionRelationship to a (Specified)Occurrence	AP242ed2	Confirmed
<a href="#">#6020</a>	Enable PropertyValueAssignments on Document	AP242e1 TC2	Resolved, fixed
<a href="#">#6021</a>	Clarify added value of General-ShapeDependentProperty.PropertyType	AP242e1 TC2	Confirmed against P4442
<a href="#">#6022</a>	Combined use of PartViewRelationship and ViewOccurrenceRelationship	AP242e1 TC2	Confirmed against P4442
<a href="#">#6273</a>	Definition of the order of the elements in the XSD	AP242e1 TC2	Confirmed
<a href="#">#6290</a>	Dedicated XML elements for the transfer of units without value	AP242e1 TC2	Confirmed
<a href="#">#6291</a>	Add 'Role' to ApprovalAssignment	AP242e1 TC2	Resolved, fixed
<a href="#">#6844</a>	Default/Allowed Values of Properties	AP242e2 DIS	Confirmed
<a href="#">#6856</a>	Add real length/precision, integer length, optional/mandatory, unique,	AP242e3	Confirmed

Issue# (Link)	Short Description	Target Milestone	Status March 2019
	indexed, string length, string pattern to PropertyDefinition		
<a href="#">#7537</a>	CartesianTransformation not any longer subtype of RepresentationItem	AP242ed DIS	Resolved, fixed
<a href="#">#8058</a>	Add AlternatePartVersionRelationship	SMRL v9	New
<a href="#">#8081</a>	Add AlternatePartVersionRelationship	CoreModel v1 CD	Confirmed
<a href="#">#8181</a>	WHERE rule in Entity "Identifier"	--	New
<a href="#">#8182</a>	AxisPlacement: attributes Axis and RefDirection	--	New
<a href="#">#8183</a>	add PropertyAssignments to AssemblyOccurrenceRelationshipSubstitution	--	New
<a href="#">#8185</a>	AlternatePartRelationship should be able to relate parts having different part categories	--	New

## Annex C Reference Documents

This recommended practices document is based on and derived from various other documents, schemas, and technical presentations. Those resources are listed below:

- AP242 TC BO Model XML / EXPRESS Schema
  - Dated March 30, 2016
- Model Usage Guidance for STEP AP242 BO Model CAD Exchange (DOC)
  - Release 0.2, July 16, 2012
  - Authors: F. Darré, A. Fournier
- STEP AP242 XML Nested Assembly Approach (PPT)
  - February 24, 2014
  - Authors: M. Ungerer, G. Hirel
- AP242 BO Model IS - Simplified Shape Association and Transformation (PPT)
  - February 24, 2014
  - Author: M. Ungerer
- CAx-IF Recommended Practices (<http://www.cax-if.de/> - <http://www.cax-if.org/>)
  - Geometric and Assembly Validation Properties: Release 4.5; Aug. 22, 2019
  - External References: Release 3.1; Jan. 20, 2014
  - User Defined Attributes: Release 1.5; Aug. 15, 2016

- STEP File Compression: Release 1.2; Aug. 15, 2016
- PDM Schema Usage Guide: Release 4.3; Jan., 2002
- LOTAR Part 115 “Explicit CAD Assembly Structure”
- VDA Recommendation 4956-1 “Assembly Data Exchange”  
 ([http://www.prostep.org/fileadmin/freie\\_downloads/Empfehlungen-Standards/VDA/VDA\\_4956-1\\_Product-Data-Management\\_1.0.pdf](http://www.prostep.org/fileadmin/freie_downloads/Empfehlungen-Standards/VDA/VDA_4956-1_Product-Data-Management_1.0.pdf)).
- JT Application Benchmark 2013-2016 Experiences
- MIL-STD-31000A (<http://model-based-enterprise.org/mil-standards.html>)

## Annex D Conversion from implicitly to explicitly defined transformation

The first step is now to extract the two matrices implicitly given by each of the two placements. The AxisPlacement has a name, a location and two axes as attributes. The axes are the axis and ref\_direction attribute, where axis is the placement Z axis direction and the ref\_direction is an approximate to the placement X axis direction. From this information, a right-handed coordinate system is computed:

Let  $z$  be the placement Z axis direction and  $a$  be the approximate placement X axis direction. Approximate here means that  $a$  and  $z$  are not required to be orthogonal. Then the exact placement X axis direction is given as  $x = \langle a - (a \cdot z)z \rangle$  and the placement Y axis direction calculates to  $y = \langle z \times x \rangle$ .

For the first representation item, the following calculations would result:

$$\text{axis: } z = \begin{pmatrix} 0.0 \\ -0.8660254 \\ 0.5 \end{pmatrix}, \quad \text{ref\_direction: } a = \begin{pmatrix} 1.0 \\ 0.0 \\ 0.0 \end{pmatrix},$$

therefore  $x = \langle a - (a \cdot z)z \rangle = \langle a - 0z \rangle = a$  because  $z$  and  $a$  are already orthogonal in this example.

Next step is calculating  $y$  using the vector product:  $y = \langle z \times x \rangle = \begin{pmatrix} 0.0 \\ 0.5 \\ 0.8660254 \end{pmatrix}$ .

So the geometric function which leads from the coordinates of the global coordinate system to those of the first axis placement is represented by the rotation matrix  $A$  given by the three

vectors  $x$ ,  $y$  and  $z$  plus the translation vector  $t$  given by the AxisPlacement's location attribute:

$$A = \begin{pmatrix} 1.0 & 0.0 & 0.0 \\ 0.0 & 0.5 & -0.8660254 \\ 0.0 & 0.8660254 & 0.5 \end{pmatrix}, \quad t = \begin{pmatrix} 1.0 \\ 1.0 \\ 3.0 \end{pmatrix}$$

In the same way, the matrix  $B$  and the vector  $u$  are computed from the second axis placement:

$$B = \begin{pmatrix} 0.7071068 & -0.7071068 & 0.0 \\ 0.7071068 & 0.7071068 & 0.0 \\ 0.0 & 0.0 & 1.0 \end{pmatrix}, \quad u = \begin{pmatrix} 2.0 \\ 2.0 \\ 1.0 \end{pmatrix}$$

Geometrically, the matrix  $A$  defines a  $60^\circ$  rotation around the global X axis and the matrix  $B$  gives a  $45^\circ$  rotation around the global Z axis.

To get the explicit transformation from the information gained so far, the matrices have to be combined. The idea is as follows: To move a point from a location within the first placement (called 'source') into a location within the second one (called 'target'), three steps have to be made:

First, the point has to be multiplied with the inverted matrix  $A^{-1}$  to undo the rotation, which occurs when going from the global coordinate system into the first placement system.

Next, multiply it with the second matrix  $B$  to get it into the right position for the target placement.

Finally, a translation vector is needed to put the point into its correct location within the second axis placement. Calculation of this vector can be seen below.

As  $A$  is a rotation matrix, the inverted matrix  $A^{-1} = A^T$ , the transposed matrix. Steps 1 and 2 can be combined:

$$C = BA^{-1} = \begin{pmatrix} 0.7071068 & -0.3535534 & -0.6123724 \\ 0.7071068 & 0.3535534 & 0.6123724 \\ 0.0 & -0.8660254 & 0.5 \end{pmatrix}$$

The translation vector needed is

$$v = u - Ct = \begin{pmatrix} 3.4835639 \\ -0.8977775 \\ 0.3660254 \end{pmatrix}$$

This means moving any point  $P$  from a location within the first placement into the second one follows the calculation

$$P' = C \cdot P + v$$

## Annex E Recommendation for the Definition of Units<sup>2</sup>

This clause provides recommendations for instance population for the definition of units in the data set. Once the definition is created, other data instances reference the units as required.

For the use of this recommended practices we take the assumption that the partners have agreed beforehand which units to use in a project.

**Note:** The definitions given in this Annex are valid for AP242 edition 1 TC1 BO Model schema.

### E.1 SI Base Unit Definitions

The following is the recommendation for exchange of SI base unit definitions<sup>3</sup>:

Millimetre:

```
<Unit uid="u--100000001">
  <Kind><ClassString>SI system</ClassString></Kind>
  <Name><ClassString>metre</ClassString></Name>
  <Prefix><ClassString>milli</ClassString></Prefix>
  <Quantity><ClassString>length</ClassString></Quantity>
</Unit>
```

Kilogram:

```
<Unit uid="u--100000002">4
  <Kind><ClassString>SI system</ClassString></Kind>
  <Name><ClassString>gram</ClassString></Name>
  <Prefix><ClassString>kilo</ClassString></Prefix>
  <Quantity><ClassString>mass</ClassString></Quantity>
</Unit>
```

Seconds:

```
<Unit uid="u--100000003">
  <Kind><ClassString>SI system</ClassString></Kind>
  <Name><ClassString>second</ClassString></Name>
  <Quantity><ClassString>time</ClassString></Quantity>
</Unit>
```

Ampère:

```
<Unit uid="u--100000004">
  <Kind><ClassString>SI system</ClassString></Kind>
  <Name><ClassString>ampere</ClassString></Name>
  <Quantity><ClassString>electric current</ClassString></Quantity>
</Unit>
```

Kelvin:

---

<sup>2</sup> <http://www.nist.gov/pml/wmd/metric/si-units.cfm>

<sup>3</sup> [https://en.wikipedia.org/wiki/SI\\_base\\_unit](https://en.wikipedia.org/wiki/SI_base_unit)

<sup>4</sup> This instance is created to support definition of SI derived units and is the formal definition that the kilo-gram is the SI unit of mass.

```
<Unit uid="u--100000005">  
  <Kind><ClassString>SI system</ClassString></Kind>  
  <Name><ClassString>kelvin</ClassString></Name>  
  <Quantity><ClassString>thermodynamic temperature</ClassString></Quantity>  
</Unit>
```

Mole:

```
<Unit uid="u--100000006">  
  <Kind><ClassString>SI system</ClassString></Kind>  
  <Name><ClassString>mole</ClassString></Name>  
  <Quantity><ClassString>amount of substance</ClassString></Quantity>  
</Unit>
```

Candela:

```
<Unit uid="u--100000007">  
  <Kind><ClassString>SI system</ClassString></Kind>  
  <Name><ClassString>candela</ClassString></Name>  
  <Quantity><ClassString>luminous intensity</ClassString></Quantity>  
</Unit>
```

## E.2 SI Derived Units

List of SI derived units from SI derived unit on Wikipedia. <sup>5</sup>

The AP242 edition 1 BO Model takes a more pragmatic approach to units than Part 21 does: it is based on the assumption that a current target system simply knows what the used units are. In consequence it is not necessary to define a unit with conversion and relation to other predefined units.

### E.2.1 Named units derived from SI base units

SI derived unit exchange should use the `Unit` element with the `Unit.kind` attribute set to 'SI derived unit'.

List of named units derived from SI base units:

- hertz
- radian
- steradian
- newton
- pascal
- joule
- watt
- coulomb
- volt
- farad
- ohm
- siemens
- weber
- tesla
- henry

---

<sup>5</sup> [https://en.wikipedia.org/wiki/SI\\_derived\\_unit](https://en.wikipedia.org/wiki/SI_derived_unit)

- degree Celsius
- lumen
- lux
- becquerel
- gray
- sievert
- katal

## E.2.2 Derived quantities and units

To exchange these converted units, use the `Unit` element with the `Unit.kind` attribute set to 'Unspecified SI derived unit'.

Examples of quantity:

- acceleration
- area
- velocity
- volume

Examples of SI derived unit:

- square metre
- cubic metre
- metre per second
- cubic metre per second
- metre per second squared
- metre per second cubed
- metre per quartic second
- radian per second
- newton second
- newton metre second
- newton metre
- newton per second
- reciprocal metre
- kilogram per square metre
- kilogram per cubic metre
- cubic metre per kilogram
- mole per cubic metre
- cubic metre per mole
- joule second
- joule per kelvin
- joule per kelvin mole
- joule per kilogram kelvin
- joule per mole
- joule per kilogram
- joule per cubic metre
- newton per metre
- watt per square metre
- watt per metre kelvin
- square metre per second
- pascal second
- coulomb per square metre
- coulomb per cubic metre



- ampere per square metre
- siemens per metre
- siemens square metre per mole
- farad per metre
- henry per metre
- volt per metre
- ampere per metre
- candela per square metre
- lumen second
- lux second
- coulomb per kilogram
- gray per second
- ohm metre

mm2:

```
<Unit uid="u--100000007">
  <Kind><ClassString>Unspecified SI derived unit</ClassString></Kind>
  <Name><ClassString>square metre</ClassString></Name>
  <Prefix><ClassString>milli</ClassString></Prefix>
  <Quantity><ClassString>area</ClassString></Quantity>
</Unit>
```

### E.3 Unspecified Units

To exchange units which are neither SI units nor derived from SI units, the `Unit` element shall be used with the `Unit.kind` attributes set to 'Unspecified'.

#### E.3.1 Byte

Byte:

```
<Unit uid="u--100000009">
  <Kind><ClassString>Unspecified</ClassString></Kind>
  <Name><ClassString>byte</ClassString></Name>
  <Quantity><ClassString>data size</ClassString></Quantity>
</Unit>
```

Note that for bytes, two classes of prefixes exist; the SI prefixes (base 10) and the IEC prefixes (base 2). So 1 Kilobyte = 1000 Byte, while 1 Kibibyte = 1024 Byte. The following table gives an overview:

Decimal Prefixes			Difference (rounded)	Binary Prefixes		
SI Name	SI Symbol	Factor		IEC Name	IEC Symbol	Factor
Kilobyte	kB	10 <sup>3</sup>	2.40%	Kibibyte	KiB	2 <sup>10</sup>
Megabyte	MB	10 <sup>6</sup>	4.86%	Mebibyte	MiB	2 <sup>20</sup>
Gigabyte	GB	10 <sup>9</sup>	7.37%	Gibibyte	GiB	2 <sup>30</sup>
Terabyte	TB	10 <sup>12</sup>	9.95%	Tebibyte	TiB	2 <sup>40</sup>
Petabyte	PB	10 <sup>15</sup>	12.6%	Pebibyte	PiB	2 <sup>50</sup>
Exabyte	EB	10 <sup>18</sup>	15.3%	Exbibyte	EiB	2 <sup>60</sup>
Zettabyte	ZB	10 <sup>21</sup>	18.1%	Zebibyte	ZiB	2 <sup>70</sup>
Yottabyte	YB	10 <sup>24</sup>	20.9%	Yobibyte	YiB	2 <sup>80</sup>

The names of IEC prefixes are derived from the SI prefixes, where “kibi” means “kilo-binary”, “mebi” means “mega-binary” and so on. As shown in the table above, the difference in data size between using base 2 or base 10 for the prefixes is significant for higher factors.

See <http://physics.nist.gov/cuu/Units/binary.html> for background information.

### E.3.2 Each

To represent a quantity of instances with QuantifiedOccurrence, the unit ‘each’ is recommended. It represents a total number of objects.

```
<Unit uid="u--100000010">  
  <Kind><ClassString>Unspecified</ClassString></Kind>  
  <Name><ClassString>each</ClassString></Name>  
  <Quantity><ClassString>number of elements</ClassString></Quantity>  
</Unit>
```

### E.4 Imperial Units

The following is the recommendation for exchange of Imperial unit definitions<sup>6</sup>, the `Unit` element shall be used with the `Unit.kind` attributes set to ‘Imperial’:

Length:

- thou
- inch
- foot
- yard
- chain
- furlong
- mile
- league
- fathom
- cable
- nautical mile
- link
- rod
- chain

Area:

- perch
- rood
- acre

Volume:

- fluid ounce
- gill
- pint
- quart
- gallon

Inch:

```
<Unit uid="u--100000009">  
  <Kind><ClassString>Imperial</ClassString></Kind>
```

---

<sup>6</sup> [https://en.wikipedia.org/wiki/Imperial\\_units](https://en.wikipedia.org/wiki/Imperial_units)



```
<Name><ClassString>inch</ClassString></Name>  
<Quantity><ClassString>length</ClassString></Quantity>  
</Unit>
```

## Annex F AP214 AIM to AP242 BOM Mapping

STEP AP214 / STEP AP203 AIM			Mapping to STEP AP242 BO Model	
Entity	Attribute	Comments	Entity	Attribute
<b>Part Identification</b>				
product	id		Part	Id
	name		Part	Name
	description		Part	Description
	frame of reference	ref. to product context		no mapping needed
product_context	name	no recommendation on the value		no mapping needed
	frame of reference	ref. to application context		no mapping needed
	discipline type	no recommendation on the value		no mapping needed
application context	application			xsi.schemaLocation
application_protocol_definition	application interpreted model schema name			xsi.schemaLocation
	application protocol year			xsi.schemaLocation
	status			xsi.schemaLocation
	applications	ref. to application context		no mapping needed
product_related_product_category	name		Part	PartTypes
	description	no recommendation on the value		no mapping needed
	products	ref. to product		no mapping needed
product_category_relationship	name	no recommendation on the value		no mapping needed
	description	optional		no mapping needed
	category		SubsetMember	Superset
	sub category		SubsetMember	Subset
product_definition_formation	id		PartVersion	Id
	description		PartVersion	Description
	of product	ref. to product	Part	Versions
product_definition	id		PartView / AssemblyDefinition	Id
	description		PartView / AssemblyDefinition	Description
	formation	ref. to product definition formation	PartVersion	Views
	frame of reference	ref. to product definition context	PartView / AssemblyDefinition	InitialContext
product_definition_context	name		ViewContext	Description
	frame of reference	ref. to application context		no mapping needed
	life cycle stage		ViewContext	LifeCycleStage
application context	application		ViewContext	ApplicationDomain
<b>Part Properties</b>				
product_definition_shape	name	recommendation as empty string		no mapping needed
	description	optional		no mapping needed
	definition	ref. to product definition		no mapping needed
shape_definition_representation	definition	ref. to product definition shape		no mapping needed
	used representation	ref. to shape representation	PartView / AssemblyDefinition	DefiningGeometry
shape_representation	name		ExternalGeometricModel	Id
	items		ExternalGeometricModel	Items
	context of items		ExternalGeometricModel	ContextOfItems
geometric_representation_context	context identifier		GeometricCoordinateSpace	Id
	context type	Unique value recommended : "External"		no mapping needed
	coordinate space dimension		GeometricCoordinateSpace	DimensionCount

geometric_representation_item	name		RepresentationItem	Name
axis2_placement_3d	name		AxisPlacement	Name
	location		AxisPlacement	Position
	axis		AxisPlacement	Axis
	ref_direction		AxisPlacement	RefDirection
shape_aspect	name		ShapeElement	Name
	description	optional	ShapeElement	Description
	of_shape		ShapeElement	ElementOf
	product_definitional	logical		
property_definition	name	Unique value recommended : "external definition"		no mapping needed
	description	optional		no mapping needed
	definition	ref. to document file	ExternalGeometricModel	ExternalFile
property_definition_representation	definition	ref. to property_definition		no mapping needed
	used_representation	ref. to shape_representation		no mapping needed
representation_relationship_with_transformation	name			no mapping needed
	description	optional		no mapping needed
	rep_1	ref. to shape_representation		no mapping needed
	rep_2	ref. to shape_representation		no mapping needed
	transformation_operator	ref. to item_defined_transformation	NextAssemblyOccurrenceUsage	Placement
item_defined_transformation	name		Use of the appropriate entity regarding the type of transformation: - GeometricRepresentationRelationshipWith-PlacementTransformation - GeometricRepresentationRelationship-WithCartesianTransformation - GeometricRepresentationRelationshipWith-SameCoordinateSpace	
	description	optional		
	transform_item_1			
	transform_item_2			
cartesian_transformation_operator	name		CartesianTransformation	Name
	description	optional		
	axis1	optional		
	axis2	optional		
	local_origin			
	scale	optional	CartesianTransformation	Scale
	axis3	optional		
<b>Part Structure and Relationships</b>				
next_assembly_usage_occurrence	id		NextAssemblyOccurrenceUsage	Id
	name		NextAssemblyOccurrenceUsage	RelationType
	description		NextAssemblyOccurrenceUsage	Description
	relating_product_definition		NextAssemblyOccurrenceUsage	Relating
	related_product_definition		SingleOccurrence	Definition
	reference_designator	optional		
product_definition_shape	name	recommendation as empty string		no mapping needed
	description	optional		no mapping needed
	definition	ref. to next_assembly_usage_occurrence		no mapping needed
context_dependent_shape_representation	representation_relation	ref. to representation_relationship		no mapping needed
	represented_product_relation	ref. to product_definition_shape		no mapping needed

Document Identification				
product	id		Document	Id
	name		Document	Name
	description		Document	Description
	frame_of_reference	ref. to product context		no mapping needed
product_context	name	no recommendation on the value		no mapping needed
	frame_of_reference	ref. to application context		no mapping needed
	discipline_type	no recommendation on the value		no mapping needed
application_context	application			xsi.schemaLocation
application_protocol_definition	application_interpreted_model_schema_name			xsi.schemaLocation
	application_protocol_year			xsi.schemaLocation
	status			xsi.schemaLocation
	applications	ref. to application context		no mapping needed
product_related_product_category	name		Document	DocumentTypes
	description	no recommendation on the value		no mapping needed
	products	ref. to product		no mapping needed
product_category_relationship	name	no recommendation on the value		no mapping needed
	description	optional		no mapping needed
	category		SubsetMember	Superset
	sub_category		SubsetMember	Subset
product_definition_formation	id		DocumentVersion	Id
	description		DocumentVersion	Description
	of_product	ref. to product	Document	Versions
product_definition	id		DigitalDocumentDefinition	Id
	description		DigitalDocumentDefinition	Description
	formation	ref. to product definition formation	DocumentVersion	Views
	frame_of_reference	ref. to product definition context		no mapping needed
product_definition_context	name		managed by DocumentDefinition subtypes	
	frame_of_reference	ref. to application context		no mapping needed
	life_cycle_stage			no mapping needed
application_context	application			no mapping needed
External Files				
document_file	id		DigitalFile	Id
	name			
	description	optional	DigitalFile	Description
	kind	ref. to document type		no mapping needed
document_representation_type	name		managed by File subtypes	
	represented_document	ref. to document file		no mapping needed
document_type	product_data_type		DigitalFile	FileType
applied_identification_assignment	assigned_id		DigitalFile	VersionId
	role	ref. to identification role		no mapping needed
	items	ref. to document file		no mapping needed
identification_role	name	recommendation as "version" string	managed by DigitalFile attribute name	
	description	optional		no mapping needed
Relationship Between Documents and Constituent Files				
product_definition_with_associated_documents	id		DigitalDocumentDefinition	Id
	description		DigitalDocumentDefinition	Description
	formation	ref. to product definition formation	DocumentVersion	Views
	frame_of_reference	ref. to product definition context		no mapping needed
	documentation_ids	ref. to document file	DigitalDocumentDefinition	Files

Document and File Properties				
property_definition	name	recommendation as "document property" string		no mapping needed
	description	optional		no mapping needed
	definition	ref. to document file		no mapping needed
property_definition_representation	definition	ref. to property_definition		no mapping needed
	used_representation	ref. to representation		no mapping needed
representation	name		managed by the name of the appropriate property entity	
	items	ref. to descriptive/measure_representation item		no mapping needed
	context_of_items	ref. to representation_context		no mapping needed
	id	should not be instantiated		no mapping needed
	description	should not be instantiated		no mapping needed
representation_context	context_identifier	no value specified		no mapping needed
	context_type	recommendation as "document parameters" string		no mapping needed
descriptive_representation_item	name		Use of the appropriate property : - ContentProperty for content information - CreationProperty for creation information - FormatProperty for format information - SizeProperty for size information - DocumentFileProperty template for additional document properties	
	description			
measure_representation_item	name			
	value_component			
	unit_component			
identification_role	name		ExternalItem	Description
	description	optional		no mapping needed
applied_external_identification_assignment	assigned_id		ExternalItem	Id
	role	ref. to identification_role		no mapping needed
	source	ref. to external_source		no mapping needed
	items	ref. to document file	DigitalFile	Locations
external_source	source_id		ExternalItem	Source
	description	should not be instantiated		no mapping needed
Document and File Association with Product Data				
document_product-equivalence	name	recommendation as "equivalence" string	Out of scope	
	description	optional		
	related_product	ref. to product definition formation		
	related_document	ref. to document		
document	id	should not be instantiated	Out of scope	
	name			
	description	optional		
	kind	ref. to document type		
document_type	product data type		Out of scope	
applied_document_reference	source	no value specified		no mapping needed
	assigned_document	ref. to document or document file	DocumentAssignment	AssignedDocument
	items	ref. to product definition	DocumentAssignment	AssignedTo
role_association	item_with_role	ref. to applied_document_reference		no mapping needed
	role	ref. to object_role		no mapping needed
object_role	name		DocumentAssignment	Role
	description	optional	DocumentAssignment	Description